


## 7mm TYPE 7PA

**Frequency Range:** 10–200kHz

**Inductance Range:** 1-22mH

**Temperature Coefficient:** TC(L) 250ppm/°C max

**Internal Capacitance Values:** 10–6800pF

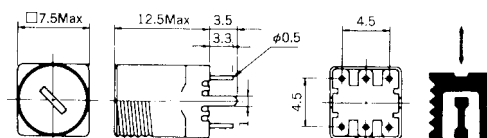

(Unit: mm)

### Features

- Designed for low frequencies and for use in RF applications, where a high saturation level becomes useful in achieving an extended dynamic range.

### STANDARD COILS SELECTION GUIDE

TYPE 7PA				
TOKO Part Number	Inductance Range (mH)	Q (min.)	Test Frequency (KHz)	
126ANS-8000Z	1.0±6%	95	252.0	
126ANS-8001Z	1.2±6%	95	252.0	
126ANS-8002Z	1.5±6%	95	252.0	
126ANS-8003Z	1.8±6%	95	252.0	
126ANS-8004Z	2.2±6%	95	252.0	
126ANS-8005Z	2.7±6%	95	252.0	
126ANS-8006Z	3.3±6%	85	252.0	
126ANS-8007Z	3.9±6%	85	252.0	
126ANS-8008Z	4.7±6%	80	252.0	
126ANS-8009Z	5.6±6%	75	252.0	
126ANS-8010Z	6.8±6%	70	252.0	
126ANS-8011Z	8.2±6%	65	252.0	
126ANS-8012Z	10.0±6%	60	79.6	
126ANS-8013Z	12.0±6%	60	79.6	
126ANS-8014Z	15.0±6%	60	79.6	
126ANS-8015Z	18.0±6%	60	79.6	
126ANS-8016Z	22.0±6%	60	79.6	