



Integrated Device Technology, Inc.

## FAST CMOS OCTAL REGISTERED TRANSCEIVERS

IDT29FCT52AT/BT/CT/DT  
IDT29FCT2052AT/BT/CT  
IDT29FCT53AT/BT/CT

### FEATURES:

#### • Common features:

- Low input and output leakage  $\leq 1\mu\text{A}$  (max.)
- CMOS power levels
- True TTL input and output compatibility
  - $V_{OH} = 3.3\text{V}$  (typ.)
  - $V_{OL} = 0.3\text{V}$  (typ.)
- Meets or exceeds JEDEC standard 18 specifications
- Product available in Radiation Tolerant and Radiation Enhanced versions
- Military product compliant to MIL-STD-883, Class B and DESC listed (dual marked)
- Available in DIP, SOIC, SSOP, QSOP, CERPACK and LCC packages

#### • Features for 29FCT52/29FCT53T:

- A, B, C and D speed grades
- High drive outputs (-15mA  $I_{OH}$ , 64mA  $I_{OL}$ )
- Power off disable outputs permit "live insertion"

#### • Features for 29FCT2052T:

- A, B and C speed grades
- Resistor outputs (-15mA  $I_{OH}$ , 12mA  $I_{OL}$  Com.)  
(-12mA  $I_{OH}$ , 12mA  $I_{OL}$  Mil.)
- Reduced system switching noise


### DESCRIPTION:

The IDT29FCT52AT/BT/CT/DT and IDT29FCT53AT/BT/CT are 8-bit registered transceivers built using an advanced dual metal CMOS technology. Two 8-bit back-to-back registers store data flowing in both directions between two bidirectional buses. Separate clock, clock enable and 3-state output enable signals are provided for each register. Both A outputs and B outputs are guaranteed to sink 64mA.

The IDT29FCT52AT/BT/CT/DT and IDT29FCT2052AT/BT/CT are non-inverting options of the IDT29FCT53AT/BT/CT.

The IDT29FCT2052AT/BT/CT has balanced drive outputs with current limiting resistors. This offers low ground bounce, minimal undershoot and controlled output fall times-reducing the need for external series terminating resistors. The IDT29FCT2052T part is a plug-in replacement for IDT29FCT52T part.

### FUNCTIONAL BLOCK DIAGRAM<sup>(1)</sup>

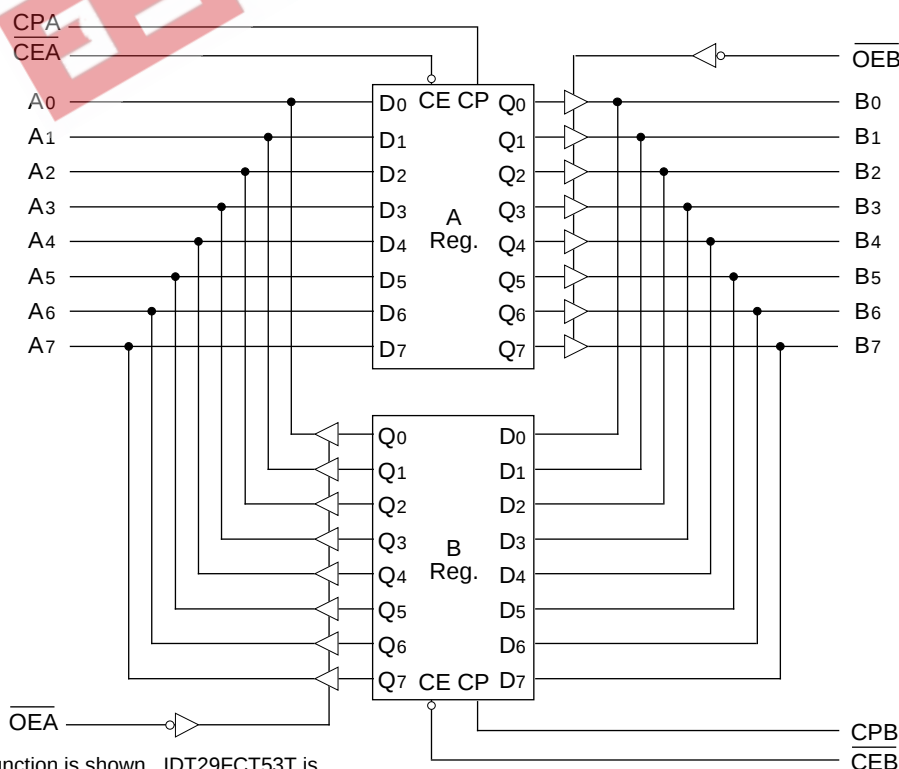

#### NOTE:

1. IDT29FCT52T/IDT29FCT2052T function is shown. IDT29FCT53T is the inverting option.


The IDT logo is a registered trademark of Integrated Device Technology, Inc.

2629 drw 01

MILITARY AND COMMERCIAL TEMPERATURE RANGES


JUNE 1995

PIN CONFIGURATIONS

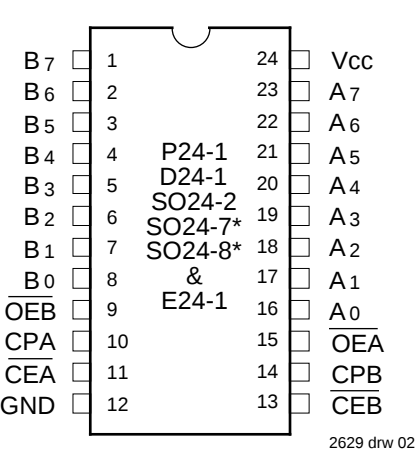

DIP/SOIC/SSOP/QSOP/CERPACK  
TOP VIEW

\* For 29FCT52/29FCT2052AT/BT/CT only

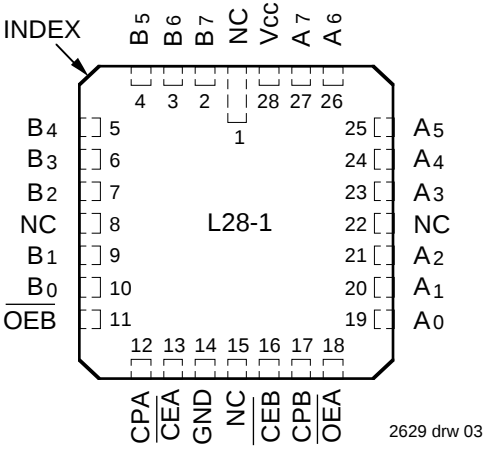

LCC  
TOP VIEW

PIN DESCRIPTION

| Name | I/O | Description                                                                                                                                                                                                                       |
|------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A0-7 | I/O | Eight bidirectional lines carrying the A Register inputs or B Register outputs.                                                                                                                                                   |
| B0-7 | I/O | Eight bidirectional lines carrying the B Register inputs or A Register outputs.                                                                                                                                                   |
| CPA  | I   | Clock for the A Register. When CEA is LOW, data is entered into the A Register on the LOW-to-HIGH transition of the CPA signal.                                                                                                   |
| CEA  | I   | Clock Enable for the A Register. When CEA is LOW, data is entered into the A Register on the LOW-to-HIGH transition of the CPA signal. When CEA is HIGH, the A Register holds its contents, regardless of CPA signal transitions. |
| OEB  | I   | Output Enable for the A Register. When OEB is LOW, the A Register outputs are enabled onto the B0-7 lines. When OEB is HIGH, the B0-7 outputs are in the high-impedance state.                                                    |
| CPB  | I   | Clock for the B Register. When CEB is LOW, data is entered into the B Register on the LOW-to-HIGH transition of the CPB signal.                                                                                                   |
| CEB  | I   | Clock Enable for the B Register. When CEB is LOW, data is entered into the B Register on the LOW-to-HIGH transition of the CPB signal. When CEB is HIGH, the B Register holds its contents, regardless of CPB signal transitions. |
| OEA  | I   | Output Enable for the B Register. When OEA is LOW, the B Register outputs are enabled onto the A0-7 lines. When OEA is HIGH, the A0-7 outputs are in the high-impedance state.                                                    |

2629 tbl 01

## REGISTER FUNCTION TABLE<sup>(1)</sup> (Applies to A or B Register)

| Inputs |    |                 | Internal<br>Q | Function  |
|--------|----|-----------------|---------------|-----------|
| D      | CP | $\overline{CE}$ |               |           |
| X      | X  | H               | NC            | Hold Data |
| L      | ↑  | L               | L             | Load Data |
| H      | ↑  | L               | H             |           |

### NOTE:

1. H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
NC = No Change  
↑ = LOW-to-HIGH Transition

2629 tbl 02

## OUTPUT CONTROL<sup>(1)</sup>

| $\overline{OE}$ | Internal<br>Q | Y-Outputs |    | Function        |
|-----------------|---------------|-----------|----|-----------------|
|                 |               | 52/2052   | 53 |                 |
| H               | X             | Z         | Z  | Disable Outputs |
| L               | L             | L         | H  | Enable Outputs  |
| L               | H             | H         | L  |                 |

### NOTE:

1. H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care  
Z = High Impedance

2629 tbl 03

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                           | Rating                               | Commercial                    | Military                      | Unit |
|----------------------------------|--------------------------------------|-------------------------------|-------------------------------|------|
| V <sub>TERM</sub> <sup>(2)</sup> | Terminal Voltage with Respect to GND | −0.5 to +7.0                  | −0.5 to +7.0                  | V    |
| V <sub>TERM</sub> <sup>(3)</sup> | Terminal Voltage with Respect to GND | −0.5 to V <sub>CC</sub> + 0.5 | −0.5 to V <sub>CC</sub> + 0.5 | V    |
| T <sub>A</sub>                   | Operating Temperature                | 0 to +70                      | −55 to +125                   | °C   |
| T <sub>BIAS</sub>                | Temperature Under Bias               | −55 to +125                   | −65 to +135                   | °C   |
| T <sub>STG</sub>                 | Storage Temperature                  | −55 to +125                   | −65 to +150                   | °C   |
| P <sub>T</sub>                   | Power Dissipation                    | 0.5                           | 0.5                           | W    |
| I <sub>OUT</sub>                 | DC Output Current                    | −60 to +120                   | −60 to +120                   | mA   |

### NOTES:

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability. No terminal voltage may exceed V<sub>CC</sub> by +0.5V unless otherwise noted.
2. Input and V<sub>CC</sub> terminals only.
3. Outputs and I/O terminals only.

2529 lmk 04

## CAPACITANCE (T<sub>A</sub> = +25°C, f = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 6    | 10   | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 8    | 12   | pF   |

### NOTE:

1. This parameter is measured at characterization but not tested.

2640 lmk 05

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Commercial:  $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 5\%$ ; Military:  $T_A = -55^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 10\%$

| Symbol    | Parameter                                                             | Test Conditions <sup>(1)</sup>                             |                     | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|-----------------------------------------------------------------------|------------------------------------------------------------|---------------------|------|---------------------|---------|---------------|
| $V_{IH}$  | Input HIGH Level                                                      | Guaranteed Logic HIGH Level                                |                     | 2.0  | —                   | —       | V             |
| $V_{IL}$  | Input LOW Level                                                       | Guaranteed Logic LOW Level                                 |                     | —    | —                   | 0.8     | V             |
| $I_{IH}$  | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}$                                     | $V_I = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current <sup>(4)</sup>                                      |                                                            | $V_I = 0.5\text{V}$ | —    | —                   | $\pm 1$ |               |
| $I_{OZH}$ | High Impedance Output Current<br>(3-State Output pins) <sup>(4)</sup> | $V_{CC} = \text{Max.}$                                     | $V_O = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZL}$ |                                                                       |                                                            | $V_O = 0.5\text{V}$ | —    | —                   | $\pm 1$ |               |
| $I_I$     | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}$ , $V_I = V_{CC} (\text{Max.})$      |                     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $V_{IK}$  | Clamp Diode Voltage                                                   | $V_{CC} = \text{Min.}$ , $I_{IN} = -18\text{mA}$           |                     | —    | -0.7                | -1.2    | V             |
| $V_H$     | Input Hysteresis                                                      | —                                                          |                     | —    | 200                 | —       | mV            |
| $I_{CC}$  | Quiescent Power Supply Current                                        | $V_{CC} = \text{Max.}$ , $V_{IN} = \text{GND}$ or $V_{CC}$ |                     | —    | 0.01                | 1       | mA            |

2629tbl06

## OUTPUT DRIVE CHARACTERISTICS FOR 29FCT52T/29FCT53T

| Symbol    | Parameter                                     | Test Conditions <sup>(1)</sup>                            |                                                                | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|-----------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------------|------|---------------------|---------|---------------|
| $V_{OH}$  | Output HIGH Voltage                           | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$   | $I_{OH} = -6\text{mA MIL.}$                                    | 2.4  | 3.3                 | —       | V             |
|           |                                               |                                                           | $I_{OH} = -8\text{mA COM'L.}$                                  |      |                     |         |               |
|           |                                               |                                                           | $I_{OH} = -12\text{mA MIL.}$<br>$I_{OH} = -15\text{mA COM'L.}$ | 2.0  | 3.0                 | —       | V             |
| $V_{OL}$  | Output LOW Voltage                            | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$   | $I_{OL} = 48\text{mA MIL.}$<br>$I_{OL} = 64\text{mA COM'L.}$   | —    | 0.3                 | 0.55    | V             |
| $I_{OS}$  | Short Circuit Current                         | $V_{CC} = \text{Max.}$ , $V_O = \text{GND}^{(3)}$         |                                                                | -60  | -120                | -225    | mA            |
| $I_{OFF}$ | Input/Output Power Off Leakage <sup>(5)</sup> | $V_{CC} = 0\text{V}$ , $V_{IN}$ or $V_O \leq 4.5\text{V}$ |                                                                | —    | —                   | $\pm 1$ | $\mu\text{A}$ |

2629tbl07

## OUTPUT DRIVE CHARACTERISTICS FOR 29FCT2052T

| Symbol    | Parameter           | Test Conditions <sup>(1)</sup>                                                       |                                                                | Min. | Typ. <sup>(2)</sup> | Max. | Unit |
|-----------|---------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------|------|---------------------|------|------|
| $I_{ODL}$ | Output LOW Current  | $V_{CC} = 5\text{V}$ , $V_{IN} = V_{IH}$ or $V_{IL}$ , $V_{OUT} = 1.5\text{V}^{(3)}$ |                                                                | 16   | 48                  | —    | mA   |
| $I_{ODH}$ | Output HIGH Current | $V_{CC} = 5\text{V}$ , $V_{IN} = V_{IH}$ or $V_{IL}$ , $V_{OUT} = 1.5\text{V}^{(3)}$ |                                                                | -16  | -48                 | —    | mA   |
| $V_{OH}$  | Output HIGH Voltage | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$                              | $I_{OH} = -12\text{mA MIL.}$<br>$I_{OH} = -15\text{mA COM'L.}$ | 2.4  | 3.3                 | —    | V    |
| $V_{OL}$  | Output LOW Voltage  | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$                              | $I_{OL} = 12\text{mA}$                                         | —    | 0.3                 | 0.50 | V    |

### NOTES:

2629tbl08

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at  $V_{CC} = 5.0\text{V}$ ,  $+25^\circ\text{C}$  ambient.
- Not more than one output should be shorted at one time. Duration of the short circuit test should not exceed one second.
- The test limit for this parameter is  $\pm 5\mu\text{A}$  at  $T_A = -55^\circ\text{C}$ .
- This parameter is guaranteed but not tested.

## POWER SUPPLY CHARACTERISTICS

| Symbol          | Parameter                                         | Test Conditions <sup>(1)</sup>                                                                                                                                                                                  |                                            |          | Min. | Typ. <sup>(2)</sup> | Max.                | Unit       |
|-----------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------|------|---------------------|---------------------|------------|
| $\Delta I_{CC}$ | Quiescent Power Supply Current<br>TTL Inputs HIGH | $V_{CC} = \text{Max.}$<br>$V_{IN} = 3.4V^{(3)}$                                                                                                                                                                 |                                            |          | —    | 0.5                 | 2.0                 | mA         |
| $I_{CCD}$       | Dynamic Power Supply Current <sup>(4)</sup>       | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$\overline{OE}_A$ or $\overline{OE}_B = \text{GND}$<br>One Input Toggling<br>50% Duty Cycle                                                                           | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | FCTxxxT  | —    | 0.15                | 0.25                | mA/<br>MHz |
|                 |                                                   |                                                                                                                                                                                                                 |                                            | FCT2xxxT | —    | 0.06                | 0.12                |            |
| $I_C$           | Total Power Supply Current <sup>(6)</sup>         | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$f_{CP} = 10\text{MHz}$<br>50% Duty Cycle<br>$\overline{OE}_A$ or $\overline{OE}_B = \text{GND}$<br>One Bit Toggling<br>at $f_i = 5\text{MHz}$<br>50% Duty Cycle      | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | FCTxxxT  | —    | 1.5                 | 3.5                 | mA         |
|                 |                                                   |                                                                                                                                                                                                                 |                                            | FCT2xxxT | —    | 0.6                 | 2.2                 |            |
|                 |                                                   |                                                                                                                                                                                                                 | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | FCTxxxT  | —    | 2.0                 | 5.5                 |            |
|                 |                                                   |                                                                                                                                                                                                                 |                                            | FCT2xxxT | —    | 1.1                 | 4.2                 |            |
|                 |                                                   | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$f_{CP} = 10\text{MHz}$<br>50% Duty Cycle<br>$\overline{OE}_A$ or $\overline{OE}_B = \text{GND}$<br>Eight Bits Toggling<br>at $f_i = 2.5\text{MHz}$<br>50% Duty Cycle | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | FCTxxxT  | —    | 3.8                 | 7.3 <sup>(5)</sup>  |            |
|                 |                                                   |                                                                                                                                                                                                                 |                                            | FCT2xxxT | —    | 1.5                 | 4.0 <sup>(5)</sup>  |            |
|                 |                                                   |                                                                                                                                                                                                                 | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | FCTxxxT  | —    | 6.0                 | 16.3 <sup>(5)</sup> |            |
|                 |                                                   |                                                                                                                                                                                                                 |                                            | FCT2xxxT | —    | 3.8                 | 13.0 <sup>(5)</sup> |            |

### NOTES:

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at  $V_{CC} = 5.0V$ ,  $+25^\circ\text{C}$  ambient.
- Per TTL driven input ( $V_{IN} = 3.4V$ ). All other inputs at  $V_{CC}$  or GND.
- This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
- Values for these conditions are examples of the  $I_{CC}$  formula. These limits are guaranteed but not tested.
- $I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}$   
 $I_C = I_{CC} + \Delta I_{CC} D_{HNT} + I_{CCD} (f_{CP}/2 + f_i N_i)$   
 $I_{CC} = \text{Quiescent Current}$   
 $\Delta I_{CC} = \text{Power Supply Current for a TTL High Input } (V_{IN} = 3.4V)$   
 $D_H = \text{Duty Cycle for TTL Inputs High}$   
 $N_T = \text{Number of TTL Inputs at } D_H$   
 $I_{CCD} = \text{Dynamic Current Caused by an Input Transition Pair (HLH or LHL)}$   
 $f_{CP} = \text{Clock Frequency for Register Devices (Zero for Non-Register Devices)}$   
 $f_i = \text{Input Frequency}$   
 $N_i = \text{Number of Inputs at } f_i$   
 All currents are in milliamperes and all frequencies are in megahertz.

2629 tbl 09

## SWITCHING CHARACTERISTICS OVER OPERATING RANGE

| Symbol       | Parameter                                        | Condition <sup>(1)</sup> | 29FCT52AT/53AT<br>29FCT2052AT |      |                     |      | 29FCT52BT/53BT<br>29FCT2052BT |      |                     |      | Unit |
|--------------|--------------------------------------------------|--------------------------|-------------------------------|------|---------------------|------|-------------------------------|------|---------------------|------|------|
|              |                                                  |                          | Com'l.                        |      | Mil.                |      | Com'l.                        |      | Mil.                |      |      |
|              |                                                  |                          | Min. <sup>(2)</sup>           | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup>           | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>CPA, CPB to An, Bn          | CL = 50pF<br>RL = 500Ω   | 2.0                           | 10.0 | 2.0                 | 11.0 | 2.0                           | 7.5  | 2.0                 | 8.0  | ns   |
| tpZH<br>tpZL | Output Enable Time<br>OEA or OEB to An, Bn       |                          | 1.5                           | 10.5 | 1.5                 | 13.0 | 1.5                           | 8.0  | 1.5                 | 8.5  | ns   |
| tpHZ<br>tPLZ | Output Disable Time<br>OEA or OEB to An, Bn      |                          | 1.5                           | 10.0 | 1.5                 | 10.0 | 1.5                           | 7.5  | 1.5                 | 8.0  | ns   |
| tsU          | Set-up Time, HIGH or LOW<br>An, Bn to CPA, CPB   |                          | 2.5                           | —    | 2.5                 | —    | 2.5                           | —    | 2.5                 | —    | ns   |
| th           | Hold Time, HIGH or LOW<br>An, Bn to CPA, CPB     |                          | 2.0                           | —    | 2.0                 | —    | 1.5                           | —    | 1.5                 | —    | ns   |
| tsU          | Set-up Time, HIGH or LOW<br>CEA, CEB to CPA, CPB |                          | 3.0                           | —    | 3.0                 | —    | 3.0                           | —    | 3.0                 | —    | ns   |
| th           | Hold Time, HIGH or LOW<br>CEA, CEB to CPA, CPB   |                          | 2.0                           | —    | 2.0                 | —    | 2.0                           | —    | 2.0                 | —    | ns   |
| tw           | Clock Pulse Width HIGH or<br>LOW <sup>(3)</sup>  |                          | 3.0                           | —    | 3.0                 | —    | 3.0                           | —    | 3.0                 | —    | ns   |

2629 tbl 10

| Symbol       | Parameter                                                                                 | Condition <sup>(1)</sup> | 29FCT52CT/53CT<br>29FCT2052CT |      |                     |      | 29FCT52DT           |      |                     |      | Unit |
|--------------|-------------------------------------------------------------------------------------------|--------------------------|-------------------------------|------|---------------------|------|---------------------|------|---------------------|------|------|
|              |                                                                                           |                          | Com'l.                        |      | Mil.                |      | Com'l.              |      | Mil.                |      |      |
|              |                                                                                           |                          | Min. <sup>(2)</sup>           | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| tPLH<br>tPHL | Propagation Delay<br>CPA, CPB to An, Bn                                                   | CL = 50pF<br>RL = 500Ω   | 2.0                           | 6.3  | 2.0                 | 7.3  | 2.0                 | 4.5  | —                   | —    | ns   |
| tpZH<br>tpZL | Output Enable Time<br>$\overline{\text{OEA}}$ or $\overline{\text{OEB}}$ to An, Bn        |                          | 1.5                           | 7.0  | 1.5                 | 8.0  | 1.5                 | 5.6  | —                   | —    | ns   |
| tpHZ<br>tPLZ | Output Disable Time<br>$\overline{\text{OEA}}$ or $\overline{\text{OEB}}$ to An, Bn       |                          | 1.5                           | 6.5  | 1.5                 | 7.5  | 1.5                 | 4.3  | —                   | —    | ns   |
| tsU          | Set-up Time, HIGH or LOW<br>An, Bn to CPA, CPB                                            |                          | 2.5                           | —    | 2.5                 | —    | 1.5                 | —    | —                   | —    | ns   |
| th           | Hold Time, HIGH or LOW<br>An, Bn to CPA, CPB                                              |                          | 1.5                           | —    | 1.5                 | —    | 1.0                 | —    | —                   | —    | ns   |
| tsU          | Set-up Time, HIGH or LOW<br>$\overline{\text{CEA}}$ , $\overline{\text{CEB}}$ to CPA, CPB |                          | 3.0                           | —    | 3.0                 | —    | 2.0                 | —    | —                   | —    | ns   |
| th           | Hold Time, HIGH or LOW<br>$\overline{\text{CEA}}$ , $\overline{\text{CEB}}$ to CPA, CPB   |                          | 2.0                           | —    | 2.0                 | —    | 1.0                 | —    | —                   | —    | ns   |
| tw           | Clock Pulse Width HIGH or<br>LOW <sup>(3)</sup>                                           |                          | 3.0                           | —    | 3.0                 | —    | 3.0                 | —    | —                   | —    | ns   |


### NOTES:

- See test circuit and waveforms.
- Minimum limits are guaranteed but not tested on Propagation Delays.
- This parameter is guaranteed but not tested.

2629 tbl 11

TEST CIRCUITS AND WAVEFORMS

TEST CIRCUITS FOR ALL OUTPUTS

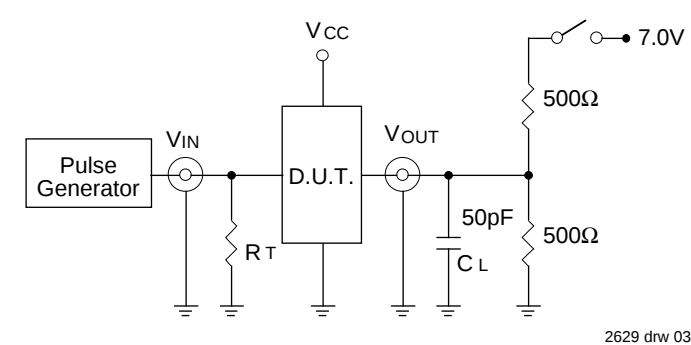


SWITCH POSITION


| Test                                    | Switch |
|-----------------------------------------|--------|
| Open Drain<br>Disable Low<br>Enable Low | Closed |
| All Other Tests                         | Open   |

**DEFINITIONS:** 2629 Ink 12  
CL= Load capacitance: includes jig and probe capacitance.  
RT = Termination resistance: should be equal to ZOUT of the Pulse Generator.



SET-UP, HOLD AND RELEASE TIMES

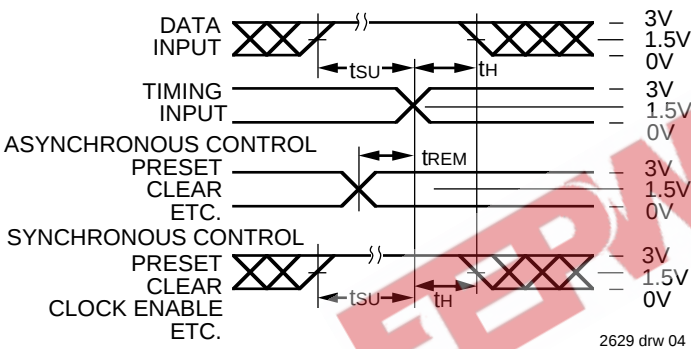

PULSE WIDTH

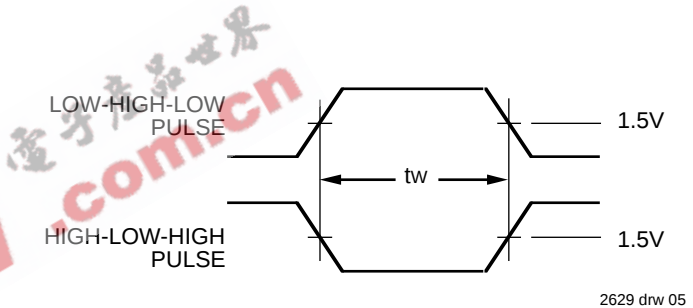

PROPAGATION DELAY

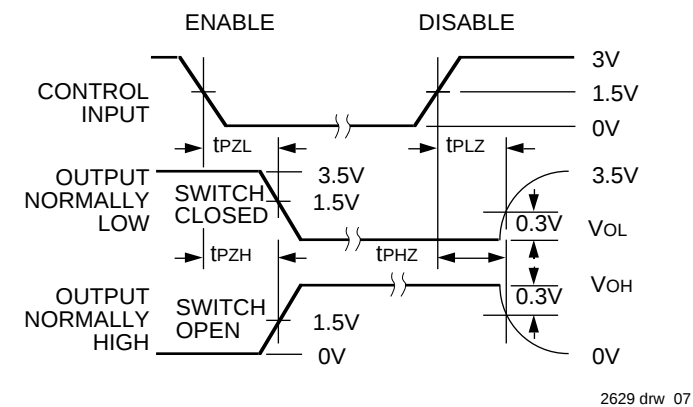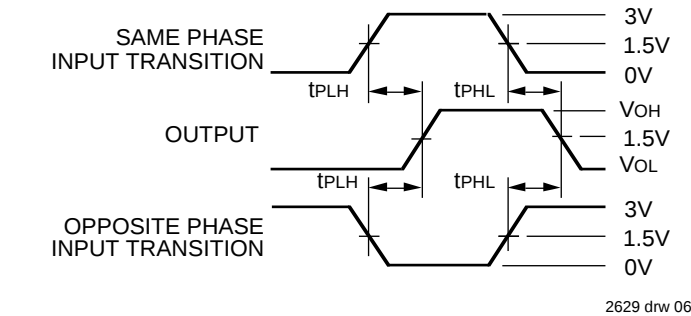

- NOTES:**
- Diagram shown for input Control Enable-LOW and input Control Disable-HIGH
  - Pulse Generator for All Pulses: Rate ≤ 1.0MHz; tr ≤ 2.5ns; tr ≤ 2.5ns

ORDERING INFORMATION

| XX          | 29FCT  | X           | XX      | XX | X       |       |                                            |
|-------------|--------|-------------|---------|----|---------|-------|--------------------------------------------|
| Temp. Range | Family | Device Type | Package |    | Process |       |                                            |
|             |        |             |         |    |         | Blank | Commercial                                 |
|             |        |             |         |    |         | B     | MIL-STD-883, Class B                       |
|             |        |             |         |    |         | P     | Plastic DIP                                |
|             |        |             |         |    |         | D     | CERDIP                                     |
|             |        |             |         |    |         | E     | CERPACK                                    |
|             |        |             |         |    |         | L     | Leadless Chip Carrier                      |
|             |        |             |         |    |         | SO    | Small Outline IC                           |
|             |        |             |         |    |         | PY    | Shrink Small Outline Package               |
|             |        |             |         |    |         | Q     | Quarter-size Small Outline Package         |
|             |        |             |         |    |         | 52AT  | Non-inverting Octal Registered Transceiver |
|             |        |             |         |    |         | 53AT  | Inverting Octal Registered Transceiver     |
|             |        |             |         |    |         | 52BT  |                                            |
|             |        |             |         |    |         | 53BT  |                                            |
|             |        |             |         |    |         | 52CT  |                                            |
|             |        |             |         |    |         | 53CT  |                                            |
|             |        |             |         |    |         | 52DT  |                                            |
|             |        |             |         |    |         | Blank | High Drive                                 |
|             |        |             |         |    |         | 20    | Balanced Drive                             |
|             |        |             |         |    |         | 54    | −55°C to +125°C                            |
|             |        |             |         |    |         | 74    | 0°C to +70°C                               |

2629 drw 08