



# SOLID STATE DEVICES, INC.

14830 Valley View Blvd \* La Mirada, Ca 90638  
 Phone: (562) 404-4474 \* Fax: (562) 404-1773

## Designer's Data Sheet

### FEATURES:


- 7.90-100 Volt Bidirectional
- Smaller than Microsemi 60KS200C Types
- Hermetically Sealed
- Meets all environmental requirements of MIL-PRF-19500
- Custom configurations available
- TX and TXV Screening Available

### APPLICATIONS:

- Protection of Voltage Sensitive Components
- Protection Against Power Interruption
- Lightning Protection

## STA60K7.9P thru STA60K100P

**60,000 WATTS  
 PEAK PULSE POWER  
 7.9 - 100 VOLTS  
 LOW VOLTAGE  
 BIDIRECTIONAL TRANSIENT  
 VOLTAGE SUPPRESSOR**





### MAXIMUM RATINGS

Stand Off Voltage	$V_{RWM}$	5.6-75	V
Steady State Power Dissipation	$P_D$	400	W
Peak Pulse Power @ 1.0 msec	$P_{PP}$	60,000	W
Peak Pulse Power and Steady State Power Derating	See Graph		
Peak Pulse Power and Pulse Width	See Graph		
Peak Pulse Power and Pulse Width	-65°C to +175°C		

Note:

SSDI Transient Suppressors offer standard Breakdown Voltage Tolerances of  $\pm 10\%$  (A) and  $\pm 5\%$  (B). For other Voltage and Voltage Tolerances, contact SSDI's Marketing Department

### PEAK PULSE POWER VS. TEMPERATURE DERATING CURVE

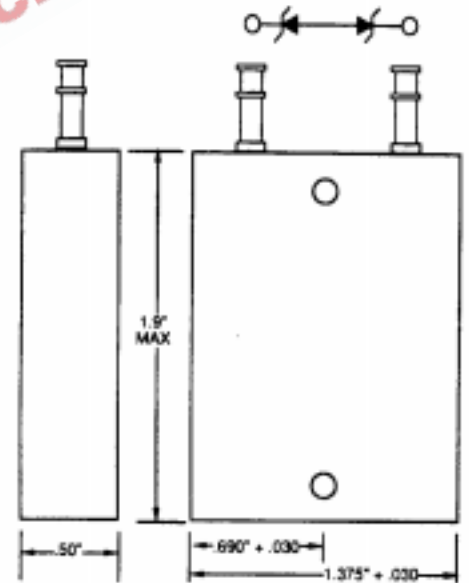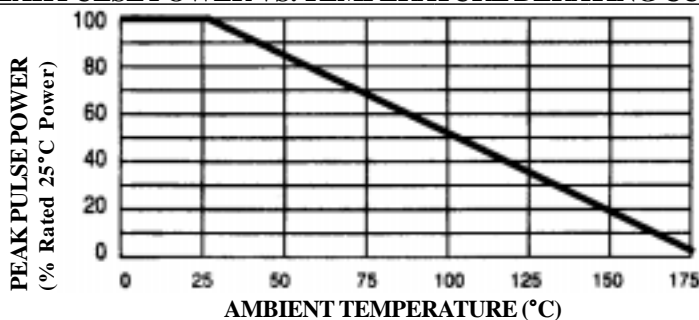

Package shown is standard configuration. SSDI can custom design your module with terminals that meet your unique design criteria. Additionally, SSDI can package these devices with an irregular footprint or offset mounting positions. This data sheet is meant to serve as an example of SSDI's Transient Protection Module Capabilities. For custom configurations, please contact SSDI's Marketing Department.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: T0008C

RMD

# STA60K7.9P thru STA60K100P




**SOLID STATE DEVICES, INC.**

14830 Valley View Blvd \* La Mirada, Ca 90638  
Phone: (562) 404-4474 \* Fax: (562) 404-1773


## Electrical Characteristics

Part Number	Break Down (note 1)		Max Reverse Stand Off		Peak Pulse Clamping		Maximum Continuous Current (note 3)	Dynamic Impedance (note 2)	Maximum Temperature Coefficient
	Nominal Voltage	Test Current	Voltage	Reverse Leakage Current	Voltage (max)	@ Current tp=1ms (note 4)			
For 5% Voltage Tolerance specify "B" in place of A	$V_{BR}$	@ $I_{BRT}$	$V_{RWM}$	$I_R$ @ $V_{RWM}$	$V_C$	$I_{PP}$	$I_{RM}$	$Z_{BR}$ @ $I_{BRT}$	TC
	Volts	A	Volts	mA	Volts	A	A	Ohms	% / °C
STA60K7.9P	7.9	7.0	5.6	60	14.5	5120	28	0.07	.03
STA60K8.9P	8.9	6.0	6.2	48	15.0	4800	30	0.08	.03
STA60K9.8P	9.8	6.0	6.8	1.6	16.0	4360	33	0.09	.03
STA60K10.7P	10.7	5.0	7.5	0.8	17.5	4000	38	0.10	.05
STA60K11P	11.0	5.0	8.2	0.8	18.5	3720	43	0.11	.05
STA60K12.7P	12.7	4.0	9.1	0.8	19.5	3480	45	0.11	.05
STA60K13.5P	13.5	4.0	10	0.8	21.0	3160	48	0.12	.05
STA60K15P	15.0	3.0	11	0.8	23.0	2720	48	0.12	.05
STA60K16.7P	16.7	3.0	12	0.8	25.0	2560	48	0.13	.06
STA60K18P	18.0	2.6	13	0.8	27.0	2280	50	0.13	.06
STA60K20.2P	20.2	2.6	15	0.8	30.0	2080	63	0.15	.06
STA60K22.6P	22.6	2.0	16	0.8	33.5	1880	70	0.16	.06
STA60K24.5P	24.5	2.0	18	0.8	36.0	1720	75	0.18	.06
STA60K27.9P	27.9	2.0	20	0.8	40.0	1560	95	0.25	.06
STA60K30.5P	30.5	1.6	22	0.8	43.5	1400	125	0.40	.06
STA60K34P	34.0	1.6	24	0.8	47.0	1280	175	0.50	.06
STA60K36P	36.0	1.2	27	0.8	52.0	1200	200	0.60	.06
STA60K39P	39.0	1.2	30	0.8	55.0	1080	175	0.70	.06
STA60K45P	45.0	1.2	33	0.8	60.0	1000	250	1.0	.06
STA60K49P	49.0	1.0	36	0.8	65.0	920	300	1.2	.07
STA60K51P	51.0	1.0	39	0.8	70.0	840	350	1.4	.07
STA60K57P	57.0	0.8	43	0.8	78.0	760	450	1.8	.07
STA60K62P	62.0	0.8	47	0.8	87.0	680	500	2.0	.07
STA60K68P	68.0	0.8	51	0.8	93.0	640	550	2.2	.08
STA60K75P	75.0	0.8	56	0.8	103.3	560	625	2.5	.08
STA60K82P	82.0	0.6	62	0.8	113.5	520	750	3.0	.08
STA60K91P	91.0	0.6	68	0.8	126.5	480	1000	4.0	.08
STA60K100P	100.0	0.6	75	0.8	138.5	440	1125	4.5	.09


**PEAK PULSE POWER VS. PULSE WIDTH**

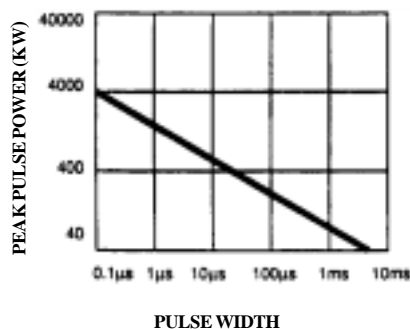

**CURRENT PULSE WAVEFORM**

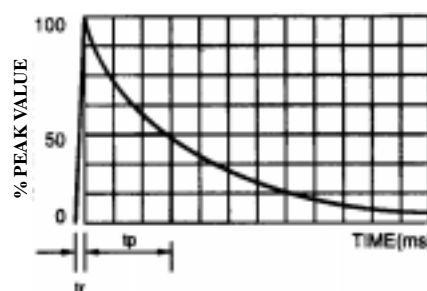

**STEADY STATE POWER DERATING**

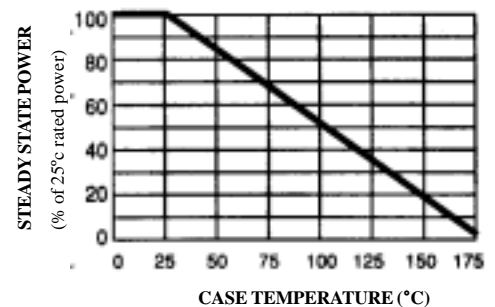

For optional high reliability screening or higher zener voltages, consult SSDI MARKETING Department.

**Notes:**

- All voltages are measured with automated test set using 35 msec test time. Longer or shorter test times will have a corresponding effect on the measured value due to heating effects.
- Dynamic impedance is derived from the AC voltage divided by the AC current with RMS value of 10% of DC test current superimposed on the test current.
- Ratings based on 25° C case temperature.
- Pulse width (tp) is defined as the time from rated peak pulse current IPP to the point where peak pulse current decayed to 50% of rated IPP.