

Molex's XPAK Guide Rail With Enhanced, Multiple Electromagnetic Interference (EMI) Gaskets Provide Superior EMI Protection

XPAK represents the new 10 Gigabit Small Form-factor Pluggable system of modules and interconnects that convert serial electrical signals to external serial optical or electrical signals. The system includes a Multi-Source Agreement (MSA) standard pluggable module and rail hardware. The technology is designed to support 10 Gigabit Fibre Channel, 10 Gigabit Ethernet, OC192/STM-64 and InfiniBand* protocols.


The XPAK guide rail aligns Molex's 10Gbps CX4 copper module (in development) or any MSA optical transceiver with the 70-circuit XPAK host connector (74441-0013). The guide rail features a passive latch point and a hard stop to control the insertion depth of the module. The rail assembly features two EMI gaskets: front and lower rear. These gaskets are designed to reduce emissions emanating from the equipment.

Molex designed the XPAK rail to meet XPAK MSA standards. The optical interface is a XPAK optical transceiver which interfaces with Molex SC cables (Series 86282).

To remain competitive, Molex offers rails and cages for pluggable systems in multiple form-factors. The difference between a "rail" and a "cage" is the following:

- Rail: an enclosure that holds a module
- Cage: an enclosure that completely covers a module

For additional information on XPAK, visit the XPAK website at: www.xpak.org

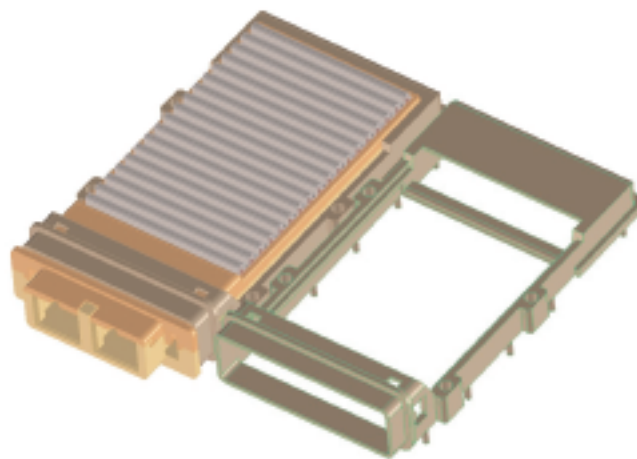

Optical transceiver shown with rail

Features and Benefits

- Press-fit post accommodates belly-to-belly applications to ensure better use of PCB real-estate
- Threaded screw holes provide screw down feature for increased retention to the PCB
- Elastomer gaskets reduce overall EMI
- Compliance with MSA standard ensures intermateability with industry standard products
- Positive latching function on the rail frame provides proper transceiver retention

MARKETS AND APPLICATIONS

- Fibre Channel
 - Switch Markets
- Gigabit Ethernet
 - Networking Markets
- InfiniBand
 - Servers



*InfiniBand is a registered trademark of the InfiniBand Trade Association

SPECIFICATIONS



XPAK 10Gbps Guide Rail


74732

Reference Information

Packaging: Tray
Designed In: Inches

Physical

Housing: Zinc Alloy
Plating: Nickel
PCB Thickness:
Press-fit: 1.57mm (.062") Single Side
Belly-to-Belly: 2.29mm (.090")

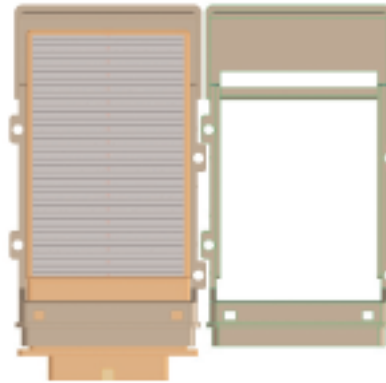


COMPLEMENTARY PRODUCTS

■ 70 Circuit Host Connector (74441-0013)

■ XPAK Copper Module -in development

■ 4X Cable Assembly:
- LaneLink™ Fibre Channel (74510)
- LaneLink™ SAS (74527)
- LaneLink™ InfiniBand (74506)
- LaneLink™ CX4 (74526)
- InfiniBand (92903)

■ Optical SC Products (86282 Series)

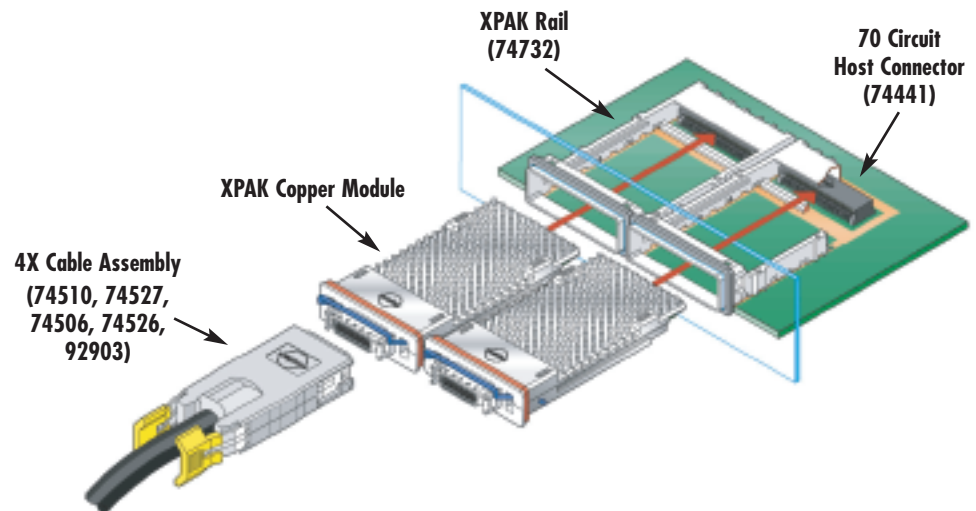

ORDERING INFORMATION

Order No.	Description
74732-0220	XPAK 10Gbps Guide Rail

Americas Headquarters
Lisle, Illinois 60532 U.S.A.
1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters
Yamato, Kanagawa, Japan
81-462-65-2324
feninfo@molex.com

Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

European Headquarters
Munich, Germany
49-89-413092-0
eurinfo@molex.com

Corporate Headquarters
2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
630-969-4550
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com/product/zaxis.html>