

# O/E/N 73

## AUTOMOTIVE POWER RELAY

### FEATURES

- High Performance
- 4.8 & 6.3 mm Flat terminals
- PC Version Available
- Suitable Couplers available
- Optional Sealing

### APPLICATION

- Head Lamp Control
- Starter Motors
- Defogger
- Radiator Fan
- A/C Controls

### TECHNICAL DATA FOR CONTACT SIDE :

| Model   | : | 73-1A            | 73-IC                             |
|---|---|------------------|-----------------------------------|
| <b>Areas of Application</b>                     |   | <b>LAMP LOAD</b> | <b>RESISTIVE / INDUCTIVE LOAD</b> |
| Contact Configuration                           | : | 1A               | 1A/1C                             |
| Contact Material                                | : | Silver Tin Oxide | Silver Nickel                     |
| Contact Rating at 23°C - 12VDC                  | : | 20A (Lamp)       | 20/10A (Res)                      |
| Electrical Life Operations Min.                 | : | $2 \times 10^5$  | $2 \times 10^5$                   |
| Mechanical Life Operations Min.                 | : | $1 \times 10^6$  | $1 \times 10^6$                   |
| Contact Voltage Current at 10 A (Min)           | : | 30mV             | 30mV                              |
| Maximum Switching Current @ 12.8 VDC For 3 Sec. | : | 100A             | 100A                              |

### GENERAL DATA FOR COIL SIDE



|                    |   |                  |
|--------------------|---|------------------|
| Nominal Coil Power | : | 1.3W (Approx)    |
| Operating Power    | : | 0.97W (Approx)   |
| Operate Time*      | : | 10 milli Seconds |
| Release Time*      | : | 7 milli Seconds  |

\* At nominal voltage without coil suppression (excluding bounce)

### OPERATING CONDITIONS


|   |   |   |
|---|---|---|
| Ambient Temperature   | : | -30°C to +85°C                            |
| Maximum Temperature   | : | 155°C                                     |
| Dielectric Strength   | : | 500VRMS                                   |
| Insulation Resistance   | : | 100 Meg. Ohms Min. At 500 VDC, 25°C RH 50 |
| Vibration Resistance (without change in the switching state > 10μS) | : | 10-500Hz 5g                               |
| Shock Resistance (without change in the switching state > 10μS)     | : | 20g, 8mS                                  |

### CIRCUIT DIAGRAM



\* Parallel resistor or diode optional

## HOW TO ORDER

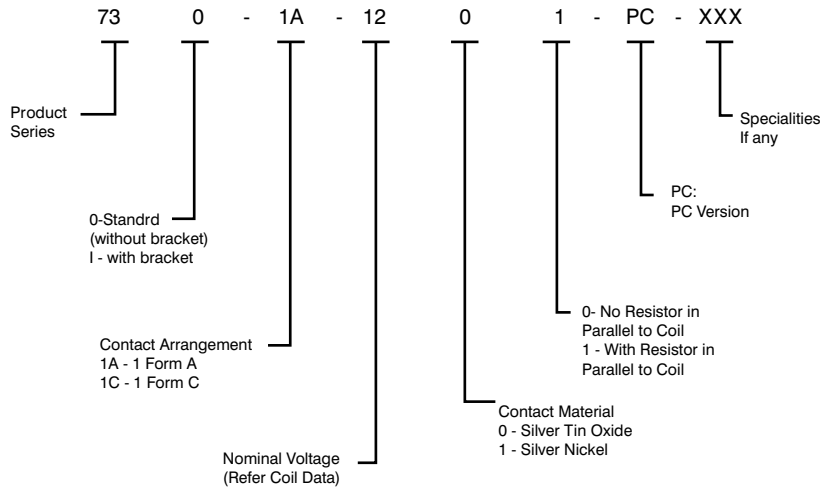


## COIL DATA


| Nominal Voltage VDC | *Pick-up Voltage VDC (Max) | Drop-out Voltage VDC (Min) | Coil Resistance Ohms $\pm 10\%$ |
|---------------------|----------------------------|----------------------------|---------------------------------|
| 06                  | 4.5                        | 0.6                        | 26                              |
| 12                  | 8.2                        | 1.2                        | 110                             |
| 24                  | 16.4                       | 2.4                        | 430                             |

\*\*Lower pick-up Voltages available on request

## DRILLING PATTERN

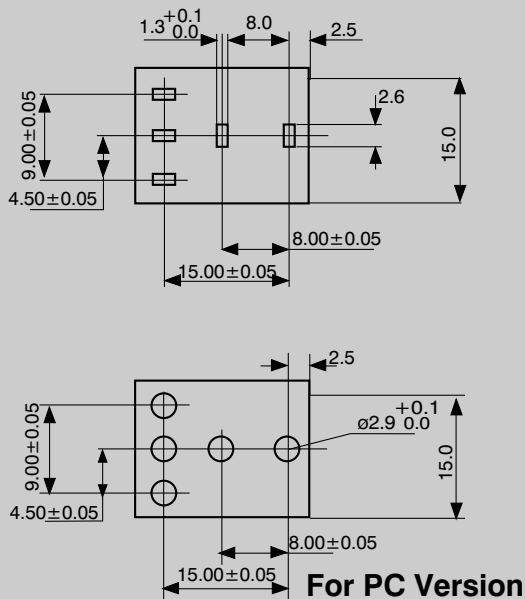

## DIMENSIONS

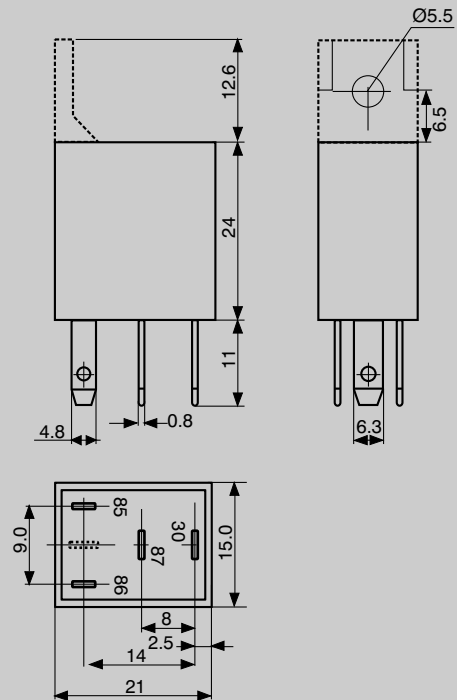

## MECHANICAL DATA

### COVER RETENTION

|      |         |
|------|---------|
| Pull | : 20KgF |
| Push | : 20KgF |

### TERMINAL STRENGTH

|      |         |
|------|---------|
| Pull | : 10KgF |
| Push | : 10KgF |

## AVAILABLE ON REQUEST

- High temperature winding wire
- Special contacts for higher contact rating
- Cover with notches
- Special coil resistance & pick-up
- Resistor / diode across coil
- For other custom solutions consult factory

## DATA ON VARIOUS TESTS CONDUCTED FOR OPERATING CONDITIONS \*

| TEST   | TEST CONDITION   | RESULT  |
|--|--|---|
| Continuous Energisation test at Extreme temperature Conditions | Relay kept at 100 <sup>o</sup> C<br>Coil Voltage : 14 VDC<br>Load given : 20 A @ 12 VDC<br>Duration : 5 Sec. On, 5 Sec. OFF<br>No. of operation : 50000<br>The above test repeated at - 30 <sup>o</sup> C for 50000 operations   | Relays successfully completed 100000 operations at given load                   |
| Thermal cycling  | Relay subjected to :-<br>-30 <sup>o</sup> C to + 100 <sup>o</sup> C in 2 Hrs. with coil ON<br>+100 <sup>o</sup> C for 2 Hrs. with coil ON<br>+100 <sup>o</sup> C to - 30 <sup>o</sup> C in 2 Hrs. with 1 Hrs. Coil ON & 1 Hrs. Coil OFF<br>-30 <sup>o</sup> C for two Hrs. with Coil ON<br>No. of Cycles : 3 | All operating parameters within the specifications after test                   |
| Shock Voltage  | Relay is subjected to :-<br>Max. Voltage : 100VDC<br>Shock Wave : Exponential Damping vibration<br>Time : 500 micro Sec.<br>Period : 30 Sec.<br>Test Time : 10 Hrs.  | After the test, all operating parameters of the relay are within specification. |
| Dropping Impact  | Relays dropped from a height of 1 Meter to a concrete floor  | No change in operating parameters of the relay.                                 |
| Jump Start   | 24 VDC for 1 minute conducting normal current at 23 <sup>o</sup> C   | Withstood successfully  |
| Corrosion Resistance   | 5% Sodium Chloride solution applied to relay for 48 Hrs.   | No damage to relay parts  |
| Water Resistance test AS per JIS D 0203 R2                     | Horizontal Plane:23rev. / Min.<br>Water Pressure:0.03 Mpa<br>Test time:10 Min  | No water ingress inside the relay   |

\*Typical values for relays with 12 VDC coil. For higher severity please consult factory