



**Model 73008
MCX JACK R/A PCB RECEPTACLE**

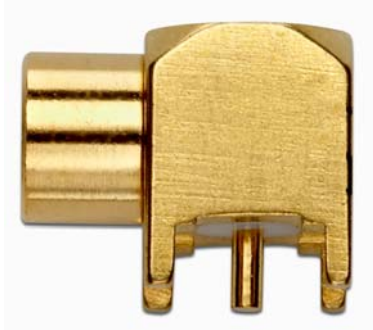

Model 73008 MCX JACK R/A PCB RECEPTACLE

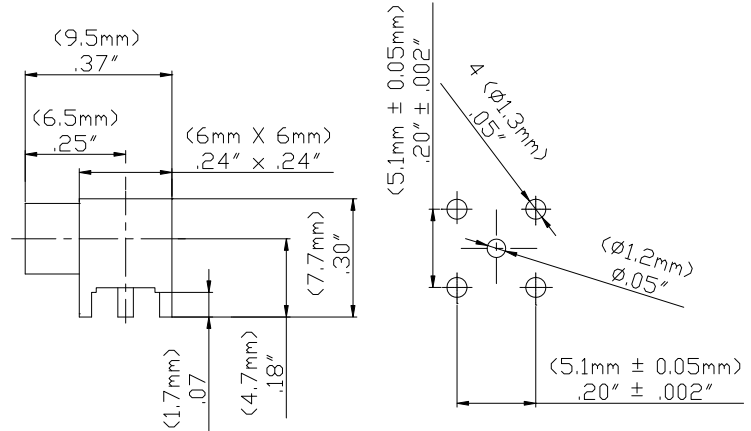

Snap-on coupling and miniature size for fast connect and disconnect where space is limited.

Features

- DC - 3 GHz bandwidth.
- 30% smaller than SMB connectors.
- Meets CECC 22220.
- Perfect for applications where space, weight, performance and ease of assembly are required.
- Precision machined and gold-plated for low loss.

Materials

- Body is machined brass with gold plating.
- Center contacts – Plug is gold plated brass and Jack is gold plated beryllium copper.
- High quality PTFE insulators.
- Crimp Ferrules are gold or nickel plated copper.

Specifications

| | |
|-----------------------------------|------------------------------------|
| Impedance | 50 Ω |
| Frequency Range | DC - 3 GHz |
| VSWR | 1.35 max. |
| Working Voltage | 170 Vrms max. |
| Dielectric withstand voltage | 750 Vrms |
| Center / Outer contact resistance | 5 / 2.5 mΩ |
| Number of insertions | 500 cycles min. |
| Insulation resistance | 1,000 MΩ min. |
| Temperature Range | -55° C to 155° C, -67° F to 311° F |

Ordering Information

Model: 73008
Description: MCX JACK R/A PCB RECEPTACLE

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.
D2003445 REV 001