

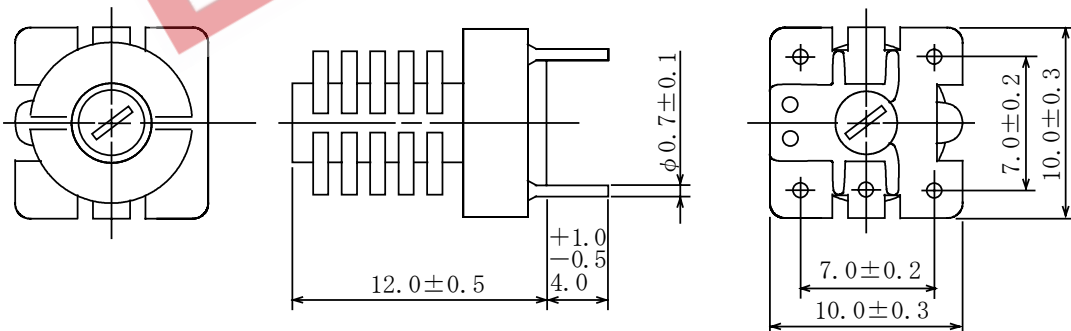
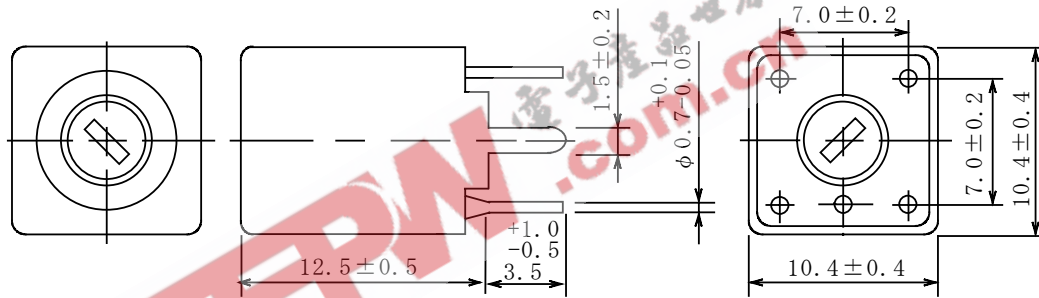
Type: S-10K, S-10KN
◆ Product Description

- 10.8×10.8mm Max.(L×W), 13.0mm Max. Height. (S-10K)
- 10.3×10.3mm Max.(L×W), 12.5mm Max. Height. (S-10KN)
- Inductance:30 μ H Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements..

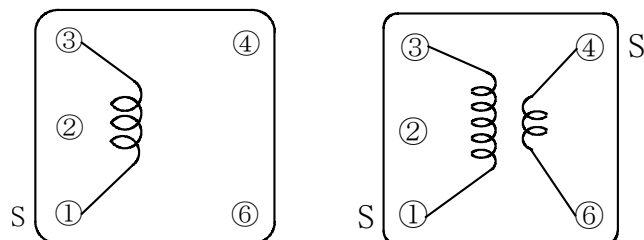
◆ Feature

- Variable type.
- Both shielded(S-10K) and unshielded(S-10KN) types are available.
- RoHS Compliance

◆ Dimensions (mm)

S-10K


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.
- * Dimensions without tolerance are approx.

Type: S-10K, S-10KN
◆ Connection (Bottom View)

S-10K
S-10KN

“S” is winding start.

◆ Specification (S-10K) (Part No. 2236-T058)

Item	(1 – 3)	Measuring Conditions
Tuning capacity	4 6 . 0 p F \pm 2 % Variable	7 5 . 0 M H z
Unloaded Qu	4 5 Min.	7 5 . 0 M H z
Inductance	0 . 0 8 μ H (Ref.)	7 5 . 0 M H z

◆ Specification(S-10KN) (Part No.S1075216)

Item	(1 – 3)	Measuring Condition
Inductance	1 7 μ H \pm 5 % Variable	2 . 5 2 M H z
Unloaded Qu	3 5 Min.	2 . 5 2 M H z