

isc Silicon PNP Darlington Power Transistor**BDX88/A/B/C****DESCRIPTION**

- High DC Current Gain-
: $h_{FE} = 750(\text{Min}) @ I_C = -6A$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = -45V(\text{Min})$ - BDX88; $-60V(\text{Min})$ - BDX88A
-80V(Min)- BDX88B; $-100V(\text{Min})$ - BDX88C
- Complement to Type BDX87/A/B/C

APPLICATIONS



- Designed for use in power linear and switching applications.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	BDX88	-45
		BDX88A	-60
		BDX88B	-80
		BDX88C	-100
V_{CEO}	Collector-Emitter Voltage	BDX88	-45
		BDX88A	-60
		BDX88B	-80
		BDX88C	-100
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-12	A
I_{CM}	Collector Current-Peak	-18	A
I_B	Base Current	-200	mA
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	120	W
T_J	Junction Temperature	200	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.45	$^\circ\text{C/W}$

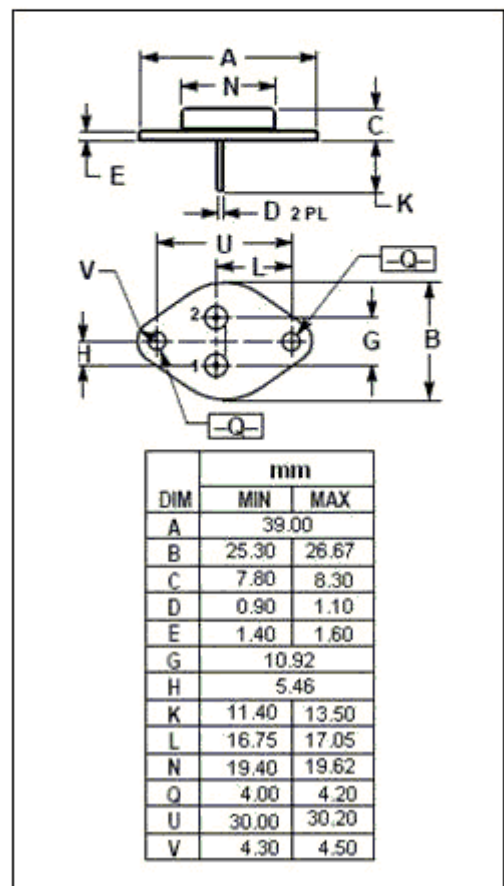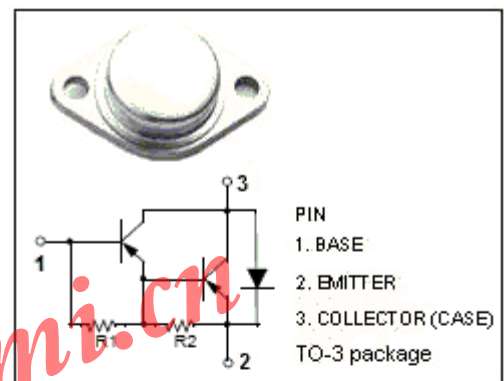

isc Silicon PNP Darlington Power Transistor

BDX88/A/B/C

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	BDX88	$I_C = -100\text{mA}; I_B = 0$	-45			V
		BDX88A		-60			
		BDX88B		-80			
		BDX88C		-100			
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		$I_C = -6\text{A}; I_B = -24\text{mA}$			-2.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		$I_C = -12\text{A}; I_B = -120\text{mA}$			-3.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C = -12\text{A}; I_B = -120\text{mA}$			-4.0	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C = -6\text{A}; V_{CE} = -3\text{V}$			-2.8	V
I_{CBO}	Collector Cutoff Current	BDX88	$V_{CB} = -45\text{V}; I_E = 0$ $V_{CB} = -45\text{V}; I_E = 0; T_C = 150^{\circ}\text{C}$			-0.5 -5.0	mA
		BDX88A	$V_{CB} = -60\text{V}; I_E = 0$ $V_{CB} = -60\text{V}; I_E = 0; T_C = 150^{\circ}\text{C}$			-0.5 -5.0	
		BDX88B	$V_{CB} = -80\text{V}; I_E = 0$ $V_{CB} = -80\text{V}; I_E = 0; T_C = 150^{\circ}\text{C}$			-0.5 -5.0	
		BDX88C	$V_{CB} = -100\text{V}; I_E = 0$ $V_{CB} = -100\text{V}; I_E = 0; T_C = 150^{\circ}\text{C}$			-0.5 -5.0	
I_{CEO}	Collector Cutoff Current	BDX88	$V_{CE} = -22\text{V}; I_B = 0$			-1.0	mA
		BDX88A	$V_{CE} = -30\text{V}; I_B = 0$				
		BDX88B	$V_{CE} = -40\text{V}; I_B = 0$				
		BDX88C	$V_{CE} = -50\text{V}; I_B = 0$				
I_{EBO}	Emitter Cutoff Current		$V_{EB} = -5\text{V}; I_C = 0$			-2.0	mA
h_{FE-1}	DC Current Gain		$I_C = -5\text{A}; V_{CE} = -3\text{V}$	1000			
h_{FE-2}	DC Current Gain		$I_C = -6\text{A}; V_{CE} = -3\text{V}$	750		18000	
h_{FE-3}	DC Current Gain		$I_C = -12\text{A}; V_{CE} = -3\text{V}$	100			