

TRANSIENT VOLTAGE SUPPRESSOR

BREAKDOWN VOLTAGE: 5.8 --- 376 V
PEAK PULSE POWER: 600 W


FEATURES

Plastic package has Underwriters Laboratory
 Flammability Classification 94V-0
 Glass passivated junction
 600W peak pulse power capability with a 10/1000 μ s
 waveform, repetition rate (duty cycle): 0.01%
 Excellent clamping capability
 Fast response time: typically less than 1.0ps from 0 Volts to
 V_{BR} for uni-directional and 5.0ns for bi-directional types
 Devices with $V_{BR} \geq 10V$ I_D are typically I_D less than 1.0 μA
 High temperature soldering guaranteed: 265 / 10 seconds,
 0.375"(9.5mm) lead length, 5lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15, molded plastic body over
 passivated junction
 Terminals: Axial leads, solderable per MIL-STD-750,
 method 2026
 Polarity: For uni-directional types the color band denotes
 the cathode, which is positive with respect to the
 anode under normal TVS operation
 Weight: 0.014 ounces, 0.39 grams
 Mounting position: Any

DO - 15

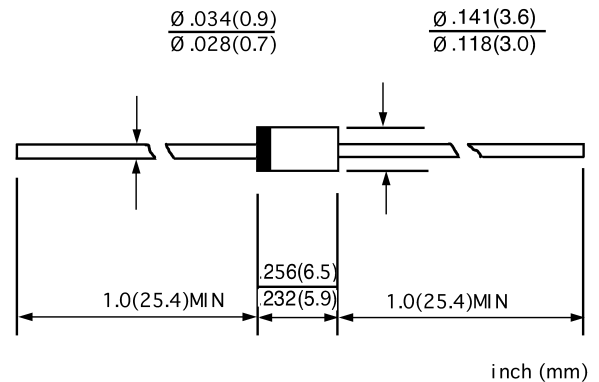

DEVICES FOR BIDIRECTIONAL APPLICATIONS

For bi-directional use add suffix letter "B" (e.g. BZW06P-6V4B).
 Electrical characteristics apply in both directions.

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Peak power dissipation with a 10/1000 μ s waveform (NOTE 1, FIG.1)	P_{PPM}	Minimum 600	W
Peak pulse current with a 10/1000 μ s waveform (NOTE 1)	I_{PPM}	SEE TABLE 1	A
Steady state power dissipation at $T_L=75$ Lead lengths 0.375"(9.5mm) (NOTE 2)	$P_{M(AV)}$	3.0	W
Peak forward surge current, 8.3ms single half Sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0	A
Thermal resistance junction to lead junction to ambient lead = 10mm	$R_{\theta JL}$ $R_{\theta JA}$	60 100	$^{\circ}W$
Operating junction and storage temperature range	T_J, T_{STG}	-55---+175	

NOTES: (1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^{\circ}C$ per Fig. 2

Rating is 500W between 40V and 188V types. For a surge greater than the maximum values, the diode will short circuit.

(2) Mounted on copper pad area of 1.6 x 1.6" (40 x 40mm) per Fig. 5

www.galaxycn.com

ELECTRICAL CHARACTERISTICS at(T_A=25 unless otherwise noted)
TABLE 1(Cont' d)

Device Type		I _D @ V _{MW} (max)		V _(BR) @ I _T (min) ⁽¹⁾		V _C @ I _{PP} (max) 10/1000μs		V _C @ I _{PP} (max) 8/20μs		Max. Temp. Coefficient of V _(BR) ⁽²⁾	Typical Capacitance C ⁽³⁾
Unidirectional	Bidirectional	μA	V	V	mA	V	A	V	A	%/C	pF
BZW06-5V8	BZW06-5V8B	1000	5.80	6.45	10	10.5	57.0	13.4	298	0.057	4000
BZW06-6V4	BZW06-6V4B	500	6.40	7.13	10	11.3	53.0	14.5	276	0.061	3700
BZW06-8V5	BZW06-8V5B	10	8.50	9.50	1	14.5	41.0	18.6	215	0.073	2800
BZW06-10	BZW06-10B	5	10.2	11.4	1	16.7	36.0	21.7	184	0.078	2300
BZW06-13	BZW06-13B	5	12.8	14.3	1	21.2	28.0	27.2	147	0.084	1900
BZW06-15	BZW06-15B	1	15.3	17.1	1	25.2	24.0	32.5	123	0.088	1600
BZW06-19	BZW06-19B	1	18.8	20.9	1	30.6	19.6	39.3	102	0.092	1350
BZW06-20	BZW06-20B	1	20.5	22.8	1	33.2	18.0	42.8	93.0	0.094	1250
BZW06-23	BZW06-23B	1	23.1	25.7	1	37.5	16.0	48.3	83.0	0.096	1150
BZW06-26	BZW06-26B	1	25.6	28.5	1	41.5	14.5	53.5	75.0	0.097	1075
BZW06-28	BZW06-28B	1	28.2	31.4	1	45.7	13.1	59.0	68.0	0.098	1000
BZW06-31	BZW06-31B	1	30.8	34.2	1	49.9	12.0	64.3	62.0	0.099	950
BZW06-33	BZW06-33B	1	33.3	37.1	1	53.9	11.1	69.7	57.0	0.100	900
BZW06-40	BZW06-40B	1	40.2	44.7	1	64.8	9.3	84.0	48.0	0.101	800
BZW06-48	BZW06-48B	1	47.8	53.2	1	77.0	6.5	100	40.0	0.103	700
BZW06-58	BZW06-58B	1	58.1	64.6	1	92.0	5.4	121	33.0	0.104	625
BZW06-70	BZW06-70B	1	70.1	77.9	1	113	4.4	146	27.0	0.105	550
BZW06-85	BZW06-85B	1	85.5	95.0	1	137	3.6	178	22.5	0.106	500
BZW06-102	BZW06-102B	1	102	114	1	165	3.0	212	19.0	0.107	450
BZW06-128	BZW06-128B	1	128	143	1	207	2.4	265	15.0	0.108	400
BZW06-154	BZW06-154B	1	154	171	1	246	2.0	317	12.6	0.108	360
BZW06-171	BZW06-171B	1	171	190	1	274	1.8	353	11.3	0.108	350
BZW06-188	BZW06-188B	1	188	209	1	328	1.5	388	10.3	0.108	330
BZW06-213	BZW06-213B	1	213	237	1	344	1.7	442	9.0	0.110	310
BZW06-256	BZW06-256B	1	256	285	1	414	1.4	529	7.6	0.110	290
BZW06-273	BZW06-273B	1	273	304	1	438	1.4	564	7.1	0.110	280
BZW06-299	BZW06-299B	1	299	332	1	482	1.2	618	6.5	0.110	270
BZW06-342	BZW06-342B	1	342	380	1	548	1.1	706	5.7	0.110	360
BZW06-376	BZW06-376B	1	376	418	1	603	1.0	776	5.7	0.100	350

NOTE: (1) Pulse test: tp ≤ 50ms.

www.galaxycn.com

 (2) $\Delta V_{(BR)} = \alpha T^* (T_A - 25) * V_{(BR)} (25^{\circ}\text{C})$

 (3) V_R = 0 V, f = 1 MHZ. For Bidirectional types, capacitance value is divided by 2

FIG.1 -- PEAK PULSE POWER RATING CURVE

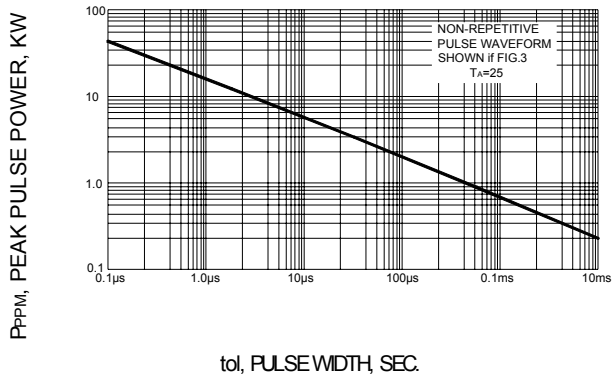


FIG.2 -- PULSE DERATING CURVE

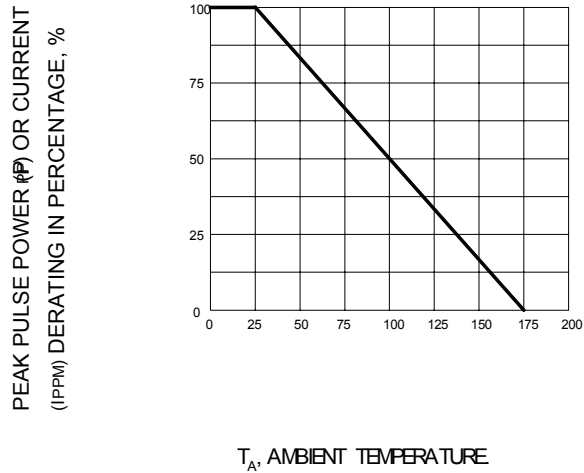


FIG.3 -- PULSE WAVEFORM

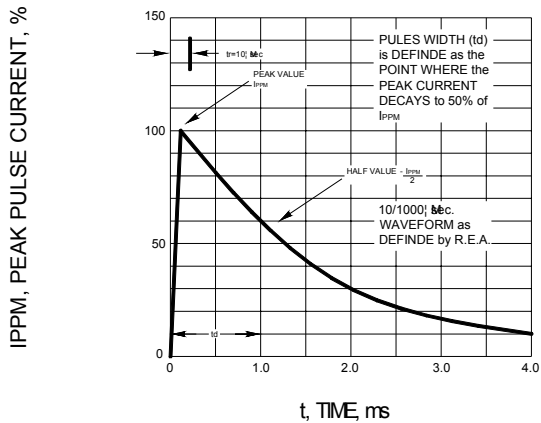


FIG.4 -- TYPICAL JUNCTION CAPACITANCE UNIDIRECTIONAL

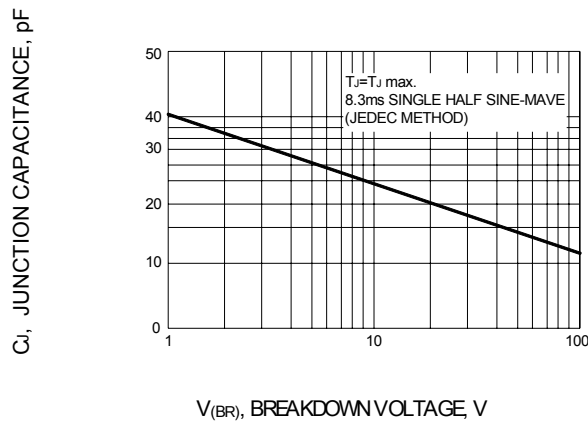


FIG.5 -- STEADY STATE POWER DERATING CURVE

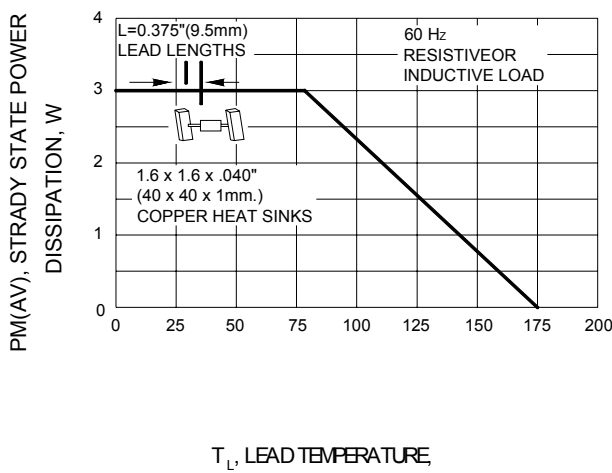


FIG.6 -- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

