

**PART NUMBERING GUIDE**

**Environmental/Mechanical Specifications on page F5**

**B A 32 C 3 - 30.000MHz - I - AT**

**Package**

B =HC49/US (3.68mm max. ht.)  
 BT=HC49/US (2.50mm max. ht.)  
 BR=HC49/US (2.00mm max. ht.)

**Tolerance/Stability**

A=±50/100      N=±10/10ppm  
 B=±30/50      P=±20/30ppm  
 C=±15/30  
 D=±15/50  
 E=±25/30  
 F=±25/50  
 G=±10/30  
 H=±20/20  
 J=± 5/10  
 K=±20/20  
 L=±10/25  
 M=±15/15

**Configuration Options**

I=Insulator Tab, TR=Tape and Reel (ammo for thru-hole), L=Third Lead  
 L3=Third Lead/Base Mount, V=Vinyl Sleeve, AT=Cut of Quartz  
 SP=Spring Mount, G=Gull Wing, G1=Gull Wing/Metal Jacket

**Mode of Operation**

1=Fundamental (over 25.000MHz AT and BT Cut Available)  
 3=Third Overtone, 5=Fifth Overtone

**Operating Temperature Range**

C=0°C to 70°C  
 E=-20°C to 70°C  
 F=-40°C to 85°C

**Load Capacitance**

S=Series, XX=XXpF (Pico Farads)

**ELECTRICAL SPECIFICATIONS**

**Revision: 1994-D**

<b>Frequency Range</b>	3.579545MHz to 100.000MHz
<b>Frequency Tolerance/Stability</b> A, B, C, D, E, F, G, H, J, K, L, M	See above for details! Other Combinations Available. Contact Factory for Custom Specifications.
<b>Operating Temperature Range</b> "C" Option, "E" Option, "F" Option	0°C to 70°C, -20°C to 70°C, -40°C to 85°C
<b>Aging</b>	±5ppm / year Maximum
<b>Storage Temperature Range</b>	-55°C to 125°C
<b>Load Capacitance</b> "S" Option "XX" Option	Series 10pF to 50pF
<b>Shunt Capacitance</b>	7pF Maximum
<b>Insulation Resistance</b>	500 Megohms Minimum at 100Vdc
<b>Drive Level</b>	2mWatts Maximum, 100uWatts Correlation
<b>Solder Temp. (max) / Plating / Moisture Sensitivity</b>	260°C / Sn-Ag-Cu / None


**EQUIVALENT SERIES RESISTANCE (ESR)**

Frequency (MHz)	ESR (ohms)	Frequency (MHz)	ESR (ohms)	Frequency (MHz)	ESR (ohms)
3.579545 to 4.999	200	9.000 to 9.999	80	24.000 to 30.000	40 (AT Cut Fund)
5.000 to 5.999	150	10.000 to 14.999	70	24.000 to 50.000	40 (BT Cut Fund)
6.000 to 7.999	120	15.000 to 15.999	60	24.576 to 29.999	100 (3rd OT)
8.000 to 8.999	90	16.000 to 23.999	40	30.000 to 60.000	100 (3rd OT)

**MECHANICAL DIMENSIONS**

**Marking Guide**

All Dimensions in mm.

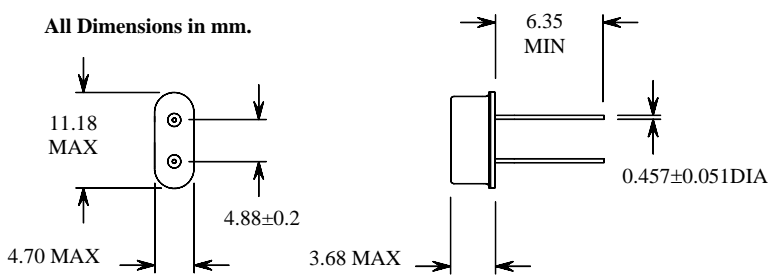

12.000CYM

12.000 = Frequency  
 C = Caliber Electronics Inc.  
 YM = Date Code (Year/Month)