


C-13-DFBA-PX-SXXXI/XXX-X

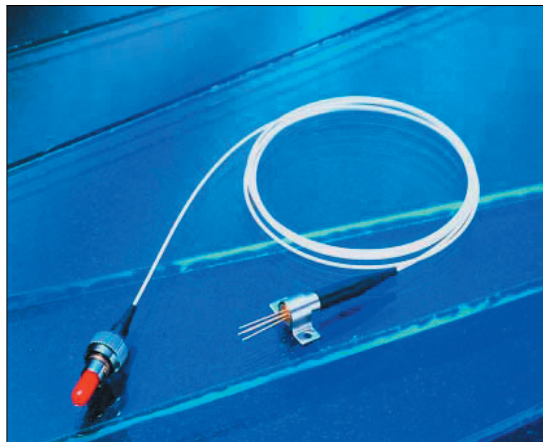

Features

- Laser diode with multi-quantum-well structure
- Un-cooled operation at -20 to +85°C
- Built-in InGaAs monitor photodiode
- Hermetically sealed active component
- Complies with Telcordia Technologies GR-468-CORE
- Single frequency operation with high SMSR
- Fiber pigtailed package with optional FC/ST/SC/MU/LC connector
- Design for Analog fiber-optics application

Absolute Maximum Rating (T_c=25°C)

Parameter	Symbol	Value	Unit
Fiber Output Power H&2	P _f	2.5(H)/4(2)	mW
Reverse Voltage	V _{RLD}	2	V
PD Reverse Voltage	V _{RPD}	20	V
PD Forward Current	I _{FDP}	2.0	mA
Operating Temperature	T _{opr}	-20 to +85	°C
Storage Temperature	T _{stg}	-40 to +85	°C

(All optical data refer to a coupled 9/125μm SM fiber)

Optical and Electrical Characteristics (T=25°C)

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Threshold Current	I _{th}	-	10	20	mA	CW
Operating Current	I _{op}	-	20	40	mA	CW, P _f =P _f (Min)
Optical Output Power H 2	P _f	1 2	- -	2 -	mW	CW, I _{th} +20mA, kink free
Operating Voltage	V _F	-	1.2	1.8	V	CW, P _f =P _f (Min)
Peak Wavelength	λ	1280	1310	1335	nm	CW, P _f =P _f (Min), RMS(-20dB) TC=-20~85°C
Side mode Suppression Ratio	S _r	30	40	-	dB	CW, P _f =P _f (Min), -20 to 85°C
Slope Efficiency H 2	Se	0.05 0.1	- -	0.1 -	mW/mA	CW, P _f =P _f (Min)
Optical Isolation	OI	45 30	- -	- -	dB	-20<T _c <85°C
Rise Time/Fall Time	t _r /t _f	-	-	0.5	ns	I _{bias} =I _{th} , 10% to 90%
Relative Intensity Noise	RIN	-	-150	-145	dB/Hz	CW
Second Order Distortion	SSO	-	-	-40	dBc	Note 1
Third Order Distortion	STO	-	-	-50	dBc	Note 1
Monitor Current	I _m	100	-	-	μA	CW, P _f =P _f (Min), V _{RPD} =2V
Monitor Dark Current	I _{DARK}	-	-	1.0	μA	V _{RPD} =5V
Photodiode Capacitance	C	-	6	15	pF	V _{RPD} =5V, f=1MHz
Tracking Error	ΔP _f /P _f	-1.5	-	1.5	dB	APC, -20 to +85°C

Note1. The laser is modulated with two-carrier tones (f1=13MHz, f2=19MHz) at OMI=15% per carrier tone

C-13-DFBA-PX-SXXXI/XXX-X

Pin Assignment





Units in mm.




Pin 1 : Monitor Diode Anode
Pin 2 : Laser Anode and Case Gnd
Pin 3 : Laser Cathode
Pin 4 : Monitor Diode Cathode




Pin 1 : Laser Anode and Monitor Diode Cathode
Pin 2 : Case Gnd
Pin 3 : Laser Cathode
Pin 4 : Monitor Diode Anode




Flange Type

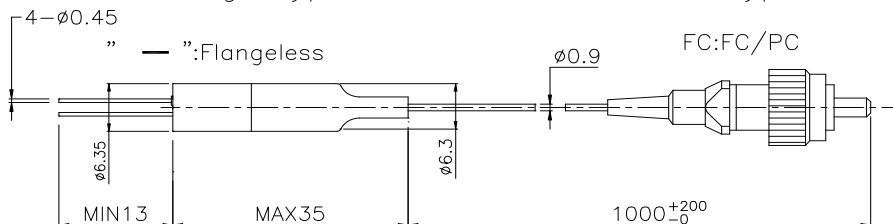

Connector Type

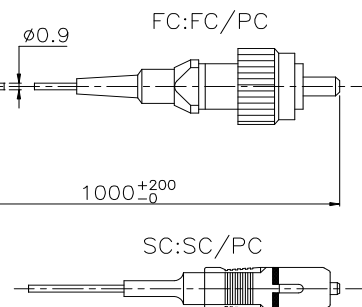


"O":Horizontal (Omega Housing)

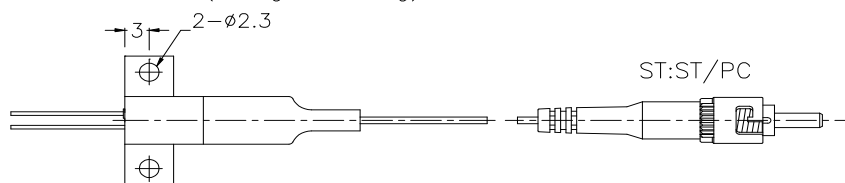

MU:MUJ/PC




"V":Vertical

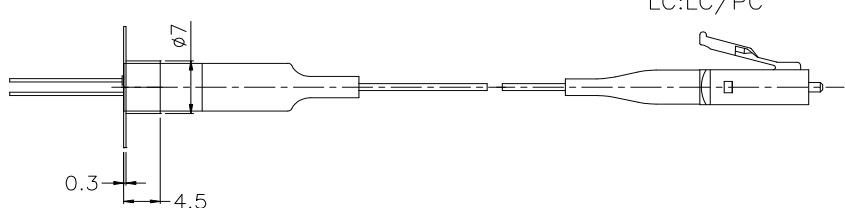

LC:LC/PC


"K":Horizontal (KX Housing)

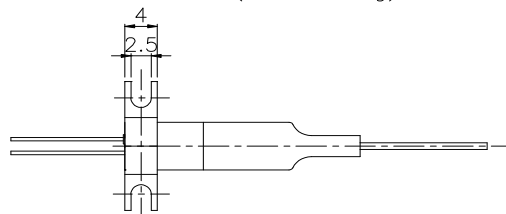

C-13-DFBA-PX-SXXXI/XXX-X

Ordering Information

C-13-DFBA-PX-SXXXI/XXX-X

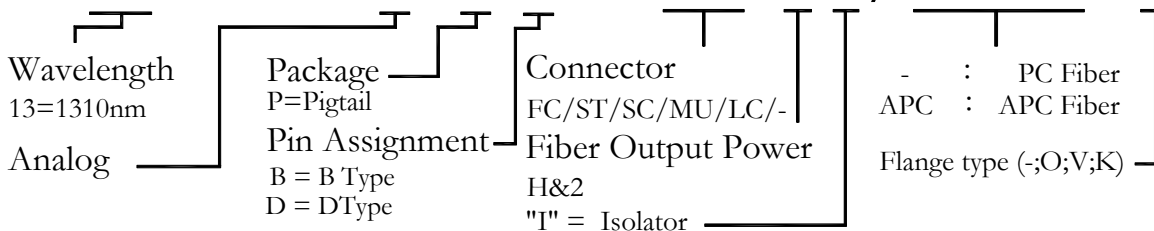

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at LuminentOIC's sole and absolute discretion. LuminentOIC warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and LuminentOIC expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

LuminentOIC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and LuminentOIC makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. LuminentOIC customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify LuminentOIC for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that LuminentOIC is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact LuminentOIC to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© LuminentOIC, Inc. 2004
All rights reserved