


J114FL

Ordering Information

| | | | | | | |
|------------------------|--|----|---|----|-------|-----|
| 1. Series | J114FL | 1C | S | 16 | 12VDC | 5.0 |
| J114FL | | | | | | |
| 2. Contact Arrangement | 1A = SPST N.O. 1C = SPDT 2A = DPST N.O. 2C = DPDT | | | | | |
| 3. Sealing Option | S = Sealed | | | | | |
| 4. Contact Rating | 12 = 12A **only available with 1 pole relays 16 = 16A **only available with 1 pole relays 8 = 8A **only available with 2 pole relays | | | | | |
| 5. Coil Voltage | 5VDC 6VDC 9VDC 12VDC 24VDC 48VDC | | | | | |
| 6. Coil Power | .41 = .41W | | | | | |

Dimensions

Units = mm

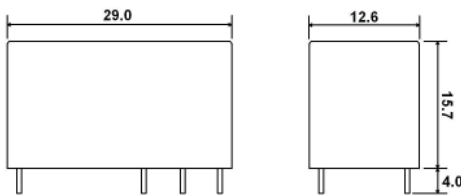

Schematics & PC Layouts

Bottom Views

