



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

SINGLE-PHASE PASSIVATED SILICON BRIDGE RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 8.0 Amperes

**KBPC8005PT
THRU
KBPC810PT**

FEATURES



- * Surge overload rating 125 amperes peak
- * Low forward voltage drop
- * Small size : simple installation
- * Silver-plated copper leads

MECHANICAL DATA

Case: JEDEC KBPC-8 molded plastic
Terminals: Plated leads solderable per MIL-STD-750, Method 2026
Mounting position: Any
Mounting: Hole thru for # 6 screw

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

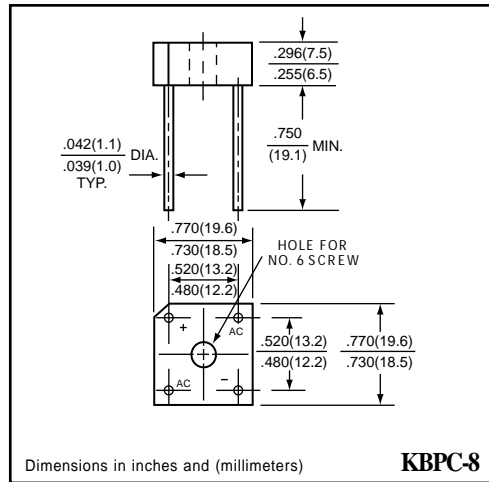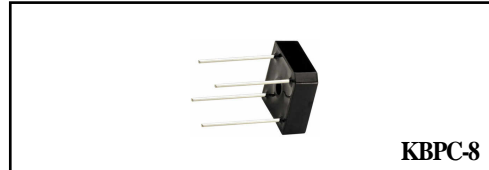

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	KBPC8005PT	KBPC801PT	KBPC802PT	KBPC804PT	KBPC806PT	KBPC808PT	KBPC810PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward TC = 50°C Rectified Output Current TC = 100°C TA = 50°C	Io	8.0							Amps
		6.0							
		6.0							
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	125							Amps
Operating Temperature Range	TJ	-55 to +125							°C
Storage Temperature Range	TSTG	-55 to +150							°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	KBPC8005PT	KBPC801PT	KBPC802PT	KBPC804PT	KBPC806PT	KBPC808PT	KBPC810PT	UNITS
Maximum Instantaneous Forward Voltage at 4.0 A DC	VF	1.1							Volts
Maximum Reverse Current at rated	IR	10							uAmps
DC blocking Voltage per element									mAmps
		0.2							

RATING CHARACTERISTIC CURVES (KBPC8005PT THRU KBPC810PT)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

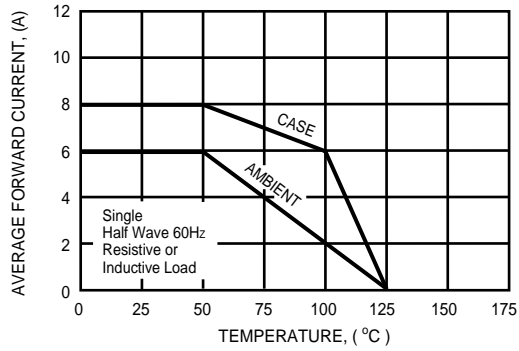


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

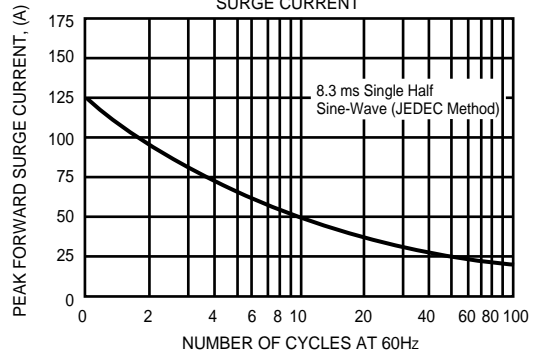


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

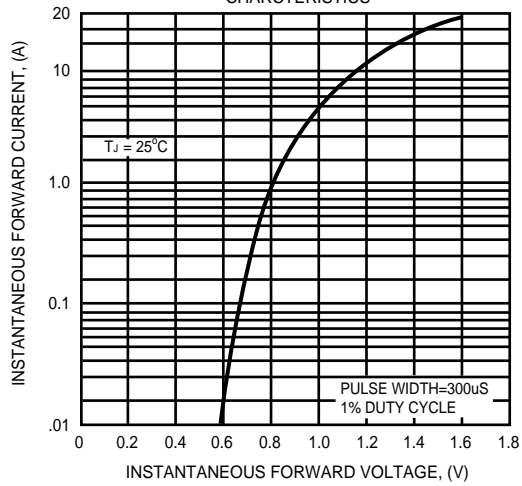


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

