



KBPC10/15/25/35/50AW SERIES

SILICON BRIDGE RECTIFIERS	REVERSE VOLTAGE - 50 to 1000Volts FORWARD CURRENT - 10/15/25/35/50 Amperes
FEATURES <ul style="list-style-type: none"> ● Surge overload -240~500 Amperes peak ● Low forward voltage drop ● Mounting Position : Any ● Electrically isolated base -2000 Volts ● Solderable 0.25" FASTON terminals ● Materials used carries U/L recognition 	<p style="text-align: center;">Dimensions in inches and (millimeters)</p>

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load 60Hz.

For capacitive load current by 20%

CHARACTERISTICS	SYMBOL	KBPC-W										UNIT				
		10005	1001	1002	1004	1006	1008	1010	15005	1501	1502		1504	1506	1508	1510
		25005	2501	2502	2504	2506	2508	2510	35005	3501	3502		3504	3506	3508	3510
		50005	5001	5002	5004	5006	5008	5010								
				10	15	25	35	50								
				KBPC 10W	KBPC 15W	KBPC 25W	KBPC 35W	KBPC 50W								
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000							V	
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	700							V	
Maximum Average Forward Rectified Output Current @T _C =55°C	I _(AV)	10		15		25		35		50		A				
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I _{FSM}	240		300		400		400		500		A				
Maximum Forward Voltage Drop Per Element at 5.0/7.5/12.5/17.5/25.0A Peak	V _F	1.1										V				
Maximum Reverse Current at Rate DC Blocking Voltage Per Element @T _A =25°C	I _R	10										uA				
Operating Temperature Range	T _J	-55 to +125										°C				
Storage Temperature Range	T _{STG}	-55 to +125										°C				

NOTES: Also available on KBPC 10W/15W/25W/35W/50W series.

RATING AND CHARACTERISTIC CURVES
KBPC10/15/25/35/50A W SERIES



FIG.1-MAXIMUM FORWARD SURGE CURRENT

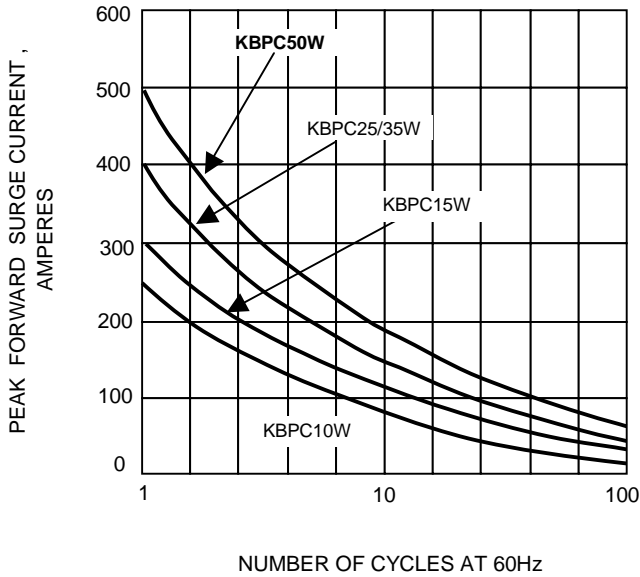


FIG.2- DERATING CURVE
 OUTPUT RECTIFIED CURRENT

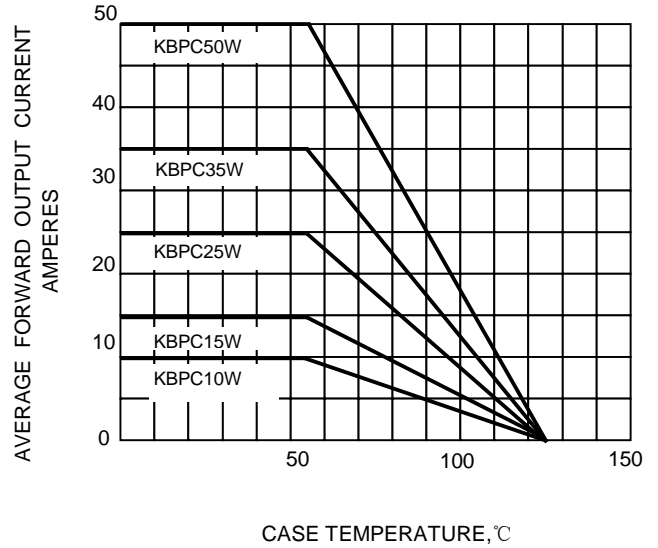


FIG.3-TYPICAL FORWARD CHARACTERISTICS

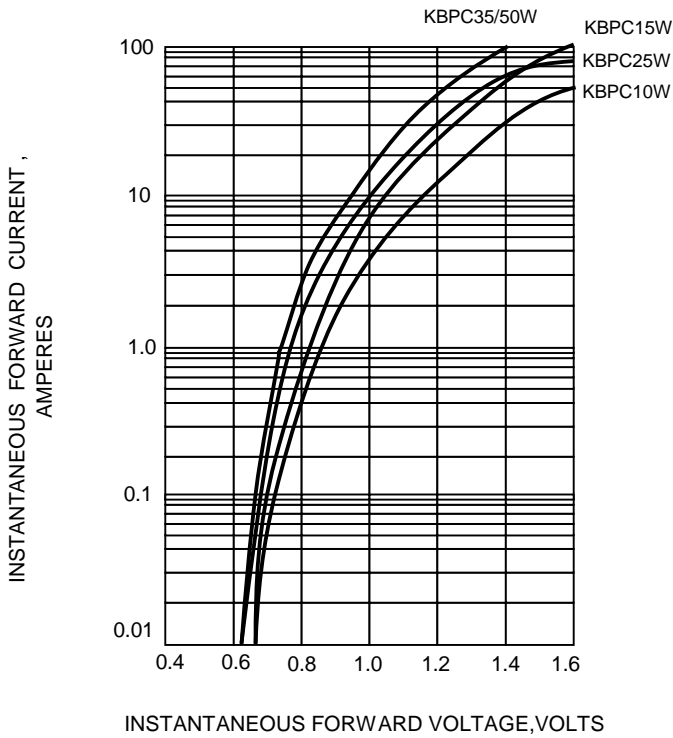


FIG.4-TYPICAL REVERSE CHARACTERISTICS

