


KBJ25A THRU KBJ25M

CURRENT 25.0 Amperes
VOLTAGE 50 to 1000 Volts

Features

- Glass Passivated Die Construction
- High Case Dielectric Strength of 1500V_{RMS}
- Low Reverse Leakage Current
- Surge Overload Rating to 350A Peak
- Ideal for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0

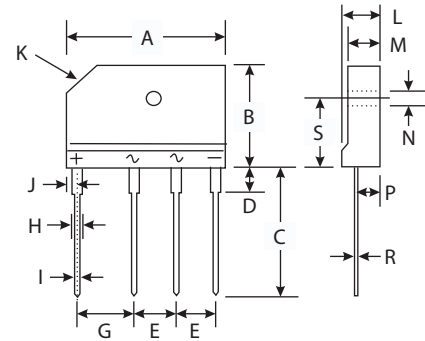

Mechanical Data

- Case : Molded Plastic
- Terminals : Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity : Molded on Body
- Mounting : Through Hole for #6 Screw
- Mounting Torque : 5.0 in-lbs Maximum
- Weight : 6.6 grams (approx.)
- Marking : Type Number

KBJ					
Dim	Min	Max	Dim	Min	Max
A	29.70	30.30	J	2.30	2.70
B	19.70	20.30	K	3.0 X 45°	
C	17.00	18.00	L	4.40	4.80
D	3.80	4.20	M	3.40	3.80
E	7.30	7.70	N	3.10	3.40
G	9.80	10.20	P	2.50	2.90
H	2.00	2.40	R	0.60	0.80
I	0.90	1.10	S	10.80	11.20

All Dimensions in mm

Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	KBJ 25A	KBJ 25B	KBJ 25D	KBJ 25G	KBJ 25J	KBJ 25K	KBJ 25M	Units
Peak Repetitive Reverse voltage	V _{RRM}								
Working Peak Reverse voltage	V _{VRM}	50	100	200	400	600	800	1000	Volts
DC Blocking voltage	V _R								
RMS Reverse voltage	V _{R(RMS)}	35	70	140	280	420	560	700	Volts
Average Rectified Output Current @ T _c =100 °C	I _o	25							Amps
Non-Repetitive Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	350							Amps
Forward voltage per element @ I _F =7.5 A	V _{FM}	1.05							Volts
Peak Reverse Current at Rated DC Blocking voltage	@ T _c =25 °C	10							μA
	@ T _c =125 °C	500							
I ² t Rating for Fusing (t<8.3ms) (Note 1)	I ² t	510							A ² s
Typical Junction Capacitance per element (Note 2)	C _j	85							pF
Typical Thermal Resistance, Junction to Case (Note 3)	R _{θJA}	1.6							°C/W
Operating and Storage Temperature Range	T _J T _{STG}	-65 to +150							°C

Notes:

- (1) Non-repetitive, for t > 1.0ms and < 8.3ms.
- (2) Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
- (3) Thermal Resistance from junction to case per element. Unit mounted on 220 x 220 x 1.6mm copper plate heat sink.

RATINGS AND CHARACTERISTIC CURVES KBJ25A THRU KBJ25M

