

KBL005/RS401 THRU KBL10/RS407

SINGLE-PHASE SILICON BRIDGE RECTIFIER

VOLTAGE: 50-1000V

CURRENT: 4.0A


FEATURES

- Ideal for printed circuit board
- Surge overload ratings-150 Amperes
- Molded structure

MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL 94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Symbols molded or marked on body
- **Mounting position:** Any
- **Weight:** 4.8 grams

KBL

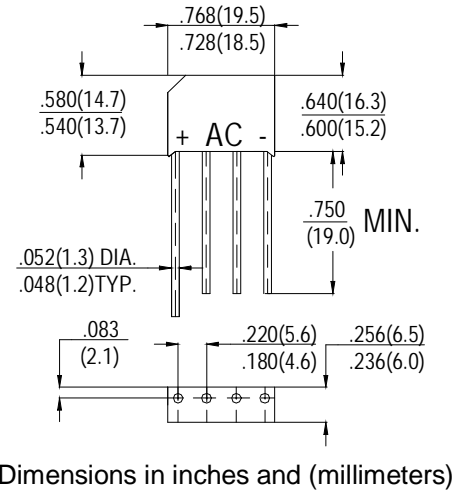

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

	SYMBOL	KBL005	KBL01	KBL02	KBL04	KBL06	KBL08	KBL10	units	
		RS401	RS402	RS403	RS404	RS405	RS406	RS407		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward rectified Output Current at $T_A=75^\circ\text{C}$	I_o	4.0							A	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	150							A	
Maximum Forward Voltage Drop per element at 2.0A DC	V_F	1.0							V	
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	@ $T_A=25^\circ\text{C}$	10							μA
		@ $T_A=100^\circ\text{C}$	500							
I^2t Rating for Fusing ($t<8.3\text{ms}$)	I^2t	93							A^2S	
Typical Junction Capacitance (Note 1)	C_J	40							pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	19							$^\circ\text{C/W}$	

Notes: 1. Measured at 1MHz and applied reverse voltage of 4.0 volts
 2. Thermal Resistance from Junction to Ambient with units mounted on 3.0×3.0×0.11”(7.5×7.5×0.3mm) AL plate