

<p><b>SILICON BRIDGE RECTIFIERS</b></p> <p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>● Surge overload -240~500 Amperes peak</li> <li>● Low forward voltage drop</li> <li>● Mounting Position : Any</li> <li>● Electrically isolated base -2000 Volts</li> <li>● Solderable 0.25" FASTON terminals</li> <li>● Materials used carries U/L recognition</li> </ul>	<p>REVERSE VOLTAGE - <b>50 to 1000</b>Volts</p> <p>FORWARD CURRENT - <b>10/15/25/35/50</b> Amperes</p> <div style="text-align: center;"> <p><b>KBPC</b></p> <p>Dimensions in inches and (millimeters)</p> </div>
---	--

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Resistive or inductive load 60Hz.  
 For capacitive load current by 20%

CHARACTERISTICS	SYMBOL	KBPC								UNIT
		KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	
		10005	1001	1002	1004	1006	1008	1010		
		15005	1501	1502	1504	1506	1508	1510		
		25005	2501	2502	2504	2506	2508	2510		
		35005	3501	3502	3504	3506	3508	3510		
50005	5001	5002	5004	5006	5008	5010				
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V	
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V	
Maximum Average Forward Rectified Output Current @T <sub>c</sub> =55°C	I <sub>(AV)</sub>	KBPC 10	KBPC 15	KBPC 25	KBPC 35	KBPC 50			A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I <sub>FSM</sub>	10	15	25	35	50			A	
		240	300	400	400	500				
Maximum Forward Voltage Drop Per Element at 5.0/7.5/12.5/17.5/25.0A Peak	V <sub>F</sub>	1.1								V
Maximum Reverse Current at Rate DC Blocking Voltage Per Element @T <sub>A</sub> =25°C	I <sub>R</sub>	10								uA
Operating Temperature Range	T <sub>J</sub>	-55 to +125								°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +125								°C

NOTES: Also available on KBPC 10W/15W/25W/35W/50W series.

**RATING AND CHARACTERISTIC CURVES**  
**KBPC10/15/25/35/50A SERIES**



FIG.1-MAXIMUM FORWARD SURGE CURRENT

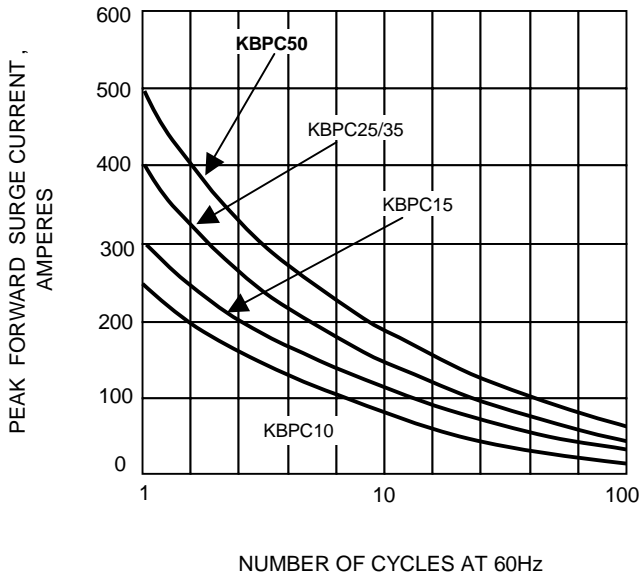


FIG.2- DERATING CURVE  
 OUTPUT RECTIFIED CURRENT

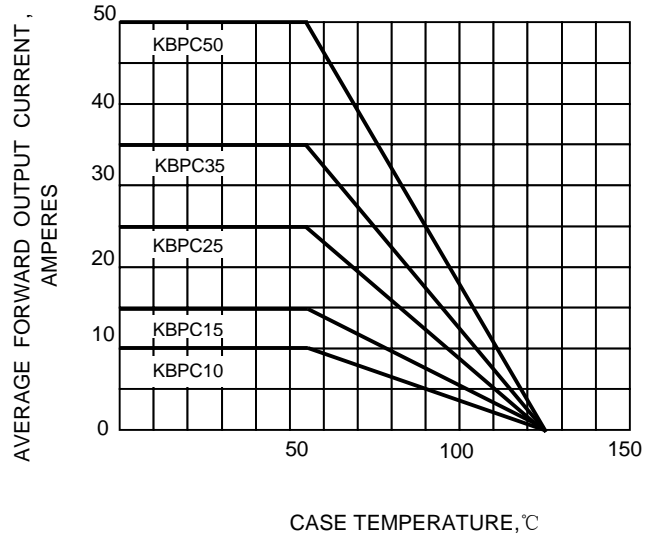


FIG.3-TYPICAL FORWARD CHARACTERISTICS

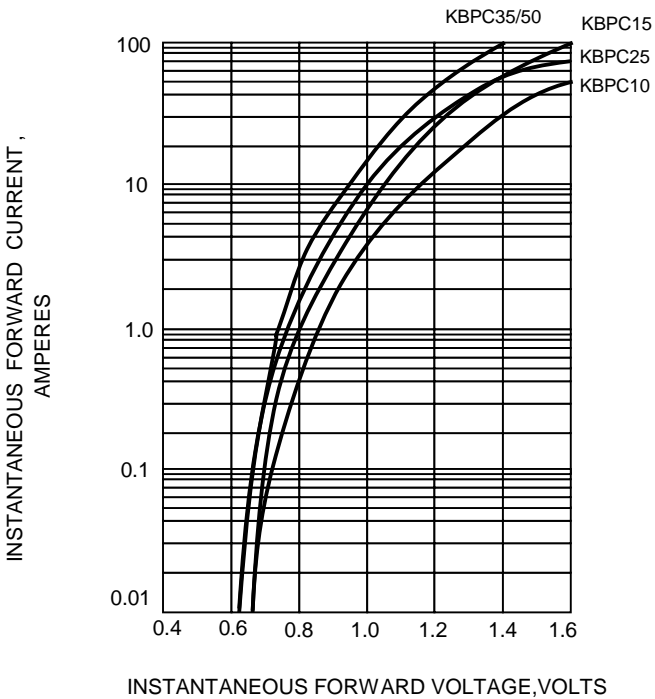


FIG.4-TYPICAL REVERSE CHARACTERISTICS

