

# A15a

## HIGH DENSITY DIP PLUG

PITCH: 1.27mm

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

#### Electrical

Current Rating : 1 Amp DC


Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.

Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

• Terminated with 0.635mm pitch flat ribbon cable.

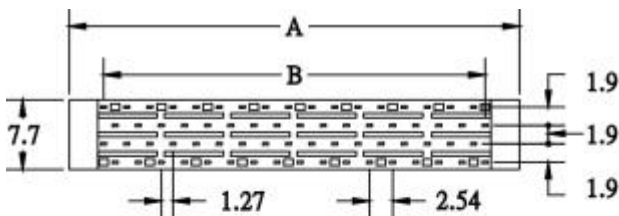

電子產品世界  
www.electronic-world.com.cn

POSITION	A	B
30	25.33	17.78
40	31.68	24.13
50	38.03	30.48
68	49.46	41.91
80	57.08	49.53
100	69.78	62.23

### HOW TO ORDER:

A15a -  1 -  2 -  3 -  4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
30 40 50 68 80 100	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK