

# A15 LOW PROFILE HIGH DENSITY DIP PLUG

PITCH: 1.27mm

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

### Electrical

Current Rating : 1 Amp DC



Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.


Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

♦ Terminated with 0.635mm pitch flat ribbon cable.

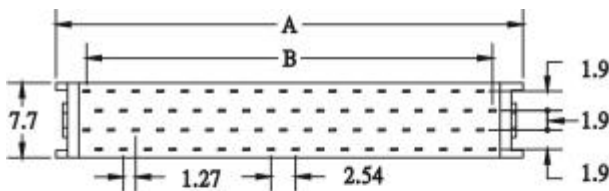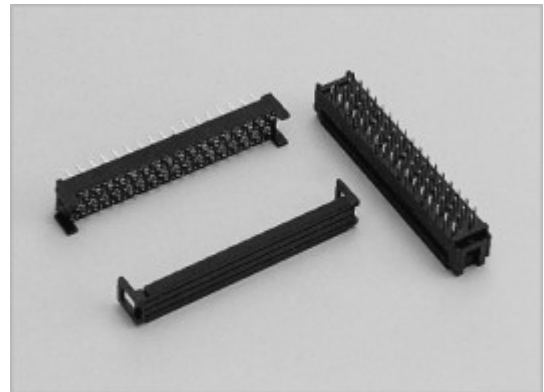

電子產品世界  
www.eepw.com.cn

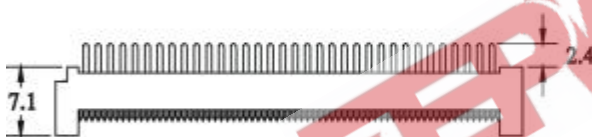

POSITION	A	B
30	23.83	17.78
50	36.53	30.48
68	47.96	41.91
80	55.58	49.53
100	68.28	62.23



## HOW TO ORDER:

A15 -  1 -  2 -  3 -  4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
30 50 68 80 100	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK