

# A08

## EDGE CARD IDC TYPE

PITCH:2.54mm

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

#### Electrical

Current Rating : 1 Amp DC




Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

• Terminated with 1.27mm pitch flat ribbon cable.

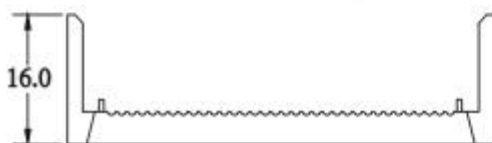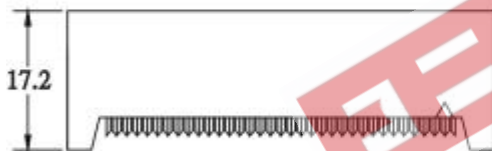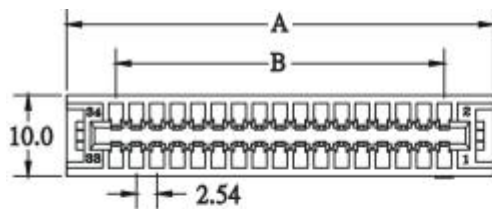

| POSITION | A     | B     |
|----------|-------|-------|
| 10       | 22.36 | 10.16 |
| 14       | 27.44 | 15.24 |
| 16       | 29.98 | 17.78 |
| 20       | 35.06 | 22.86 |
| 26       | 42.68 | 30.48 |
| 34       | 52.84 | 40.64 |
| 40       | 60.46 | 48.26 |
| 44       | 65.54 | 53.34 |
| 50       | 73.16 | 60.96 |
| 56       | 80.78 | 68.58 |
| 60       | 85.86 | 73.66 |
| 62       | 88.40 | 76.20 |
| 64       | 90.94 | 78.74 |

### HOW TO ORDER:

A08 -  1 -  2 -  3 -  4 -  5

| 1.NO. OF CONTACT                             | 2.CONTACT MATERIAL             | 3.CONTACT PLATING   | 4.SPECIAL FUNCTION   | 5.INSULATOR COLOR   |
|--|--------------------------------|---|--|---------------------|
| 10 14 16 20 26<br>34 40 44 50 56<br>60 62 64 | A: BRASS<br>B: PHOSPHOR BRONZE | T: TIN PLATED<br>S: SELECTIVE<br>G: GOLD FLASH<br>A: 5μ" INCH GOLD<br>B: 10μ" INCH GOLD<br>C: 15μ" INCH GOLD<br>D: 30μ" INCH GOLD | A: W STRAIN RELIEF<br>W PLUGGED KEY<br>B: W/O STRAIN RELIEF<br>W PLUGGED KEY<br>C: W STRAIN RELIEF<br>W/O PLUGGED KEY<br>D: W/O STRAIN RELIEF<br>W/O PLUGGED KEY | 1. BLACK<br>2. GREY |