

# A08

## EDGE CARD IDC TYPE

PITCH: 2.54mm

### SPECIFICATIONS

#### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

#### Electrical

Current Rating : 1 Amp DC




Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

• Terminated with 1.27mm pitch flat ribbon cable.

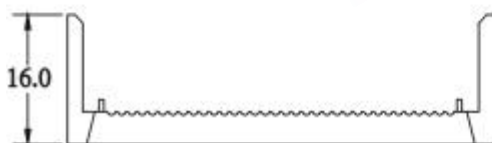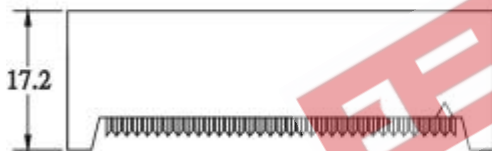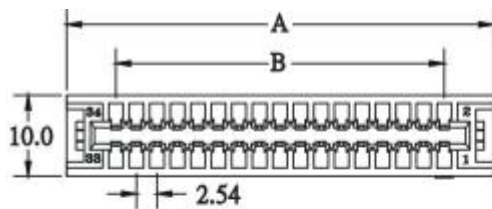

POSITION	A	B
10	22.36	10.16
14	27.44	15.24
16	29.98	17.78
20	35.06	22.86
26	42.68	30.48
34	52.84	40.64
40	60.46	48.26
44	65.54	53.34
50	73.16	60.96
56	80.78	68.58
60	85.86	73.66
62	88.40	76.20
64	90.94	78.74

### HOW TO ORDER:

A08 -  1 -  2 -  3 -  4 -  5

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.SPECIAL FUNCTION	5.INSULATOR COLOR
10 14 16 20 26 34 40 44 50 56 60 62 64	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5μ" INCH GOLD B: 10μ" INCH GOLD C: 15μ" INCH GOLD D: 30μ" INCH GOLD	A: W STRAIN RELIEF W PLUGGED KEY B: W/O STRAIN RELIEF W PLUGGED KEY C: W STRAIN RELIEF W/O PLUGGED KEY D: W/O STRAIN RELIEF W/O PLUGGED KEY	1. BLACK 2. GREY