

AZ692/AZ693

10 AMP MINIATURE POWER RELAY

FEATURES

- Isolation spacing greater than 8mm
- Dielectric strength 4000 Vrms coil to contact
- Approvals/Standards include UL, CSA, VDE, IEC, CEE, SEMKO
- Single pole – Forms A, B and C available
- 10A switching
- Life expectancy to 30 million operations
- Epoxy sealed version for automatic wave soldering and cleaning
- UL file E44211 ; CSA file LR85091 ; VDE 4120-4940-4002/A1



CONTACTS

Arrangement	SPDT (1 Form C) SPST (1 Form A and 1 Form B)
Ratings	Resistive load: Max switching power : 300W or 2500VA Max switched current : 10A ; 64A for 2ms Max switched voltage : 150* VDC or 380VAC
UL Rating	10A at 24VDC or 115VAC 0.25HP 120VAC motor load 10A at 250VAC B300 pilot duty * If switching voltage is greater than 30VDC, special precautions must be taken. Please consult the factory.
Material	Silver cadmium oxide
Resistance	<30 milliohms initially (at rated current, voltage drop method)

GENERAL DATA


Life Expectancy	Minimum operations 30 million operations
Mechanical	1x10 ⁵ at 10A, 30VDC or 115VAC
Electrical	2x10 ⁵ at 8A, 250VAC
Operate Time (typical)	6ms at nominal coil voltage
Release Time (typical)	2ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min)	4000 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	10,000 megohms min at 500VDC, 20°C, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating	At nominal coil voltage Standard -55°C to 70°C Sensitive -55°C to 80°C
Storage	Both -55°C to 110°C
Vibration	0.062" DA at 10 – 55 Hz
Shock	20g
Enclosure	PBT Polyester
Terminals	Tinned copper alloy, PC
Weight	17 grammes

COIL

Power	
At Pickup Voltage (typical)	Standard coil 337mW Sensitive coil 234mW
Max Continuous Dissipation	1.9W at 20°C ambient 1.4W at 40°C ambient
Temperature Rise	Standard 40°C at nominal coil voltage Sensitive 26°C at nominal coil voltage
Max Temperature	110°C

NOTES

- All values at 20°C
- Relay may pull in with less than 'Must Operate' value
- PCB layout viewed towards terminals
- Specifications subject to change without notice
- Unsealed relays should not be dip cleaned

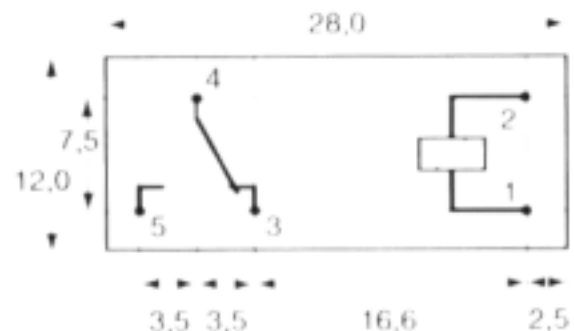

Logistic Design (UK) Limited

Unit 3 Eagle Centre Way, Sedgwick Road
Luton LU4 9US, United Kingdom

Tel +44 (0)1582 599 600
Fax +44 (0)1582 599 700

www.zettlerrelay.com
sales@zettlerrelay.com
LDZR201000