


# AZ826

## SUBMINIATURE ULTRA-SENSITIVE DIP RELAY

### FEATURES

- Low profile for compact board spacing
- DC coils to 24 VDC
- Bifurcated crossbar contacts
- Ultra-sensitivity, 84 mW pickup
- Life expectancy to 10 million operations
- High switching capacity, 24 W, 125 VA
- Fits standard 16 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- UL, CUR file E43203

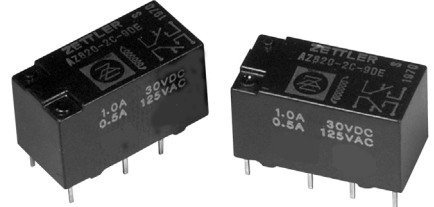

### CONTACTS

<b>Arrangement</b>	DPDT (2 Form C)
<b>Ratings</b>	Resistive load: Max. switched power: 24 W or 125 VA Max. switched current: 1 A Max. switched voltage: 150 VDC or 220 VAC
<b>Rated Load UL</b>	1.0 A at 24 VDC 1.0 A at 125 VAC
<b>Material</b>	Silver, gold plated
<b>Resistance</b>	< 50 milliohms initially

### COIL

<b>Power At Pickup Voltage (typical)</b>	180 mW standard 100 mW sensitive 84 mW ultra-sensitive
<b>Max. Continuous Dissipation</b>	1.2 W at 20°C (68°F)
<b>Temperature Rise</b>	34°C (61°F) standard 23°C (41°F) sensitive 19°C (34°F) ultra-sensitive
<b>Temperature</b>	Max. 105°C (221°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Other coil resistances and sensitivities available upon request.
4. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy</b> Mechanical Electrical	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 1.0 A 120 VAC Res.
<b>Operate Time (typical)</b>	6 ms at nominal coil voltage
<b>Release Time (typical)</b>	5 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	1500 Vrms contact to coil 500 Vrms between open contacts 1500 Vrms contact set to contact set
<b>Insulation Resistance</b>	1000 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature Operating</b>	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) standard -40°C (-40°F) to 80°C (176°F) sensitive -40°C (-40°F) to 85°C (185°F) ultra-sensitive
<b>Storage</b>	-40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	1.5 mm DA at 10–55 Hz
<b>Shock</b>	50 g 11 ms 1/2 sine
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM


10/29/02W

# AZ826

## RELAY ORDERING DATA

STANDARD COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	5.5	25	2.1	AZ826-2C-3DME
5	9.2	70	3.5	AZ826-2C-5DME
6	11.0	100	4.2	AZ826-2C-6DME
9	16.4	225	6.3	AZ826-2C-9DME
12	21.9	400	8.4	AZ826-2C-12DME
24	43.8	1600	16.8	AZ826-2C-24DME
SENSITIVE COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	7.3	45	2.1	AZ826-2C-3DSE
5	12.2	125	3.5	AZ826-2C-5DSE
6	14.7	180	4.2	AZ826-2C-6DSE
9	22.0	405	6.3	AZ826-2C-9DSE
12	29.0	720	8.4	AZ826-2C-12DSE
24	52.3	2880	16.8	AZ826-2C-24DSE
ULTRA-SENSITIVE COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	8.5	60	2.3	AZ826-2C-3DSSE
4.5	12.7	135	3.4	AZ826-2C-4.5DSSE
5	14.2	167	3.8	AZ826-2C-5DSSE
6	17.0	240	4.5	AZ826-2C-6DSSE
9	25.4	540	6.8	AZ826-2C-9DSSE
12	33.9	960	9.0	AZ826-2C-12DSSE
24	67.9	3840	18.0	AZ826-2C-24DSSE

## MECHANICAL DATA

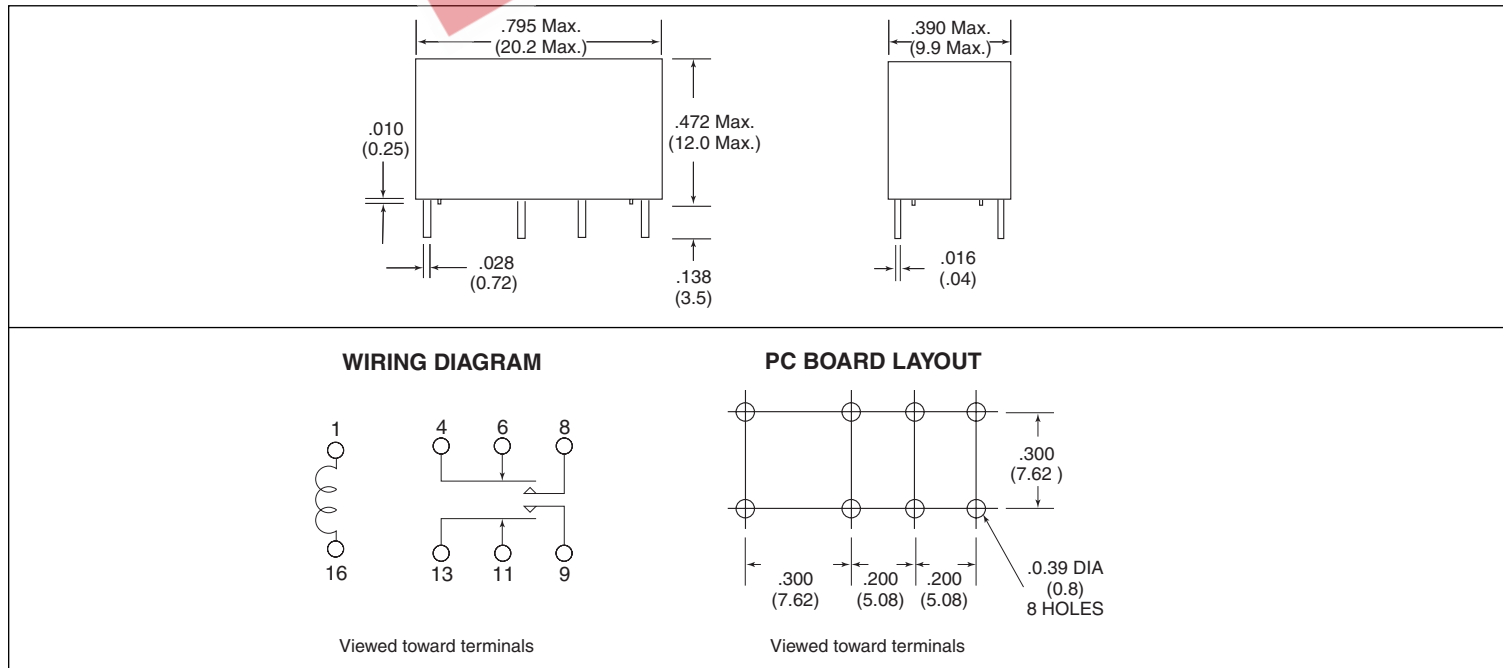

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "



# AMERICAN ZETTLER, INC.

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

10/29/02W