


# AZ942H

## 12 AMP MINIATURE PC BOARD RELAY

### FEATURES

- Extremely low cost
- 12 Amp switching capacity
- Proof tracking index (PTI/CTI) 250
- Clearance and creepage distance >2.5 mm
- Class F insulation (155 °C) available
- Meets IEEE 587 6 kV lightning surge
- UL, CUR file E43203,
- VDE file 40010958

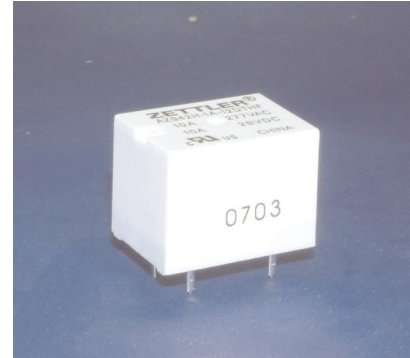

### CONTACTS

<b>Arrangement</b>	SPST (1 Form A) SPDT (1 Form C)
<b>Ratings</b>	Resistive load
<b>Form A</b>	Max. switched power: 196 W or 2770 VA Max. switched current: 12 A Max. switched voltage: 150 VDC* or 300 VAC
<b>Form C</b>	Max. switched power: 196 W or 1939 VA Max. switched current: 12 A Max. switched voltage: 150 VDC* or 300 VAC
	* Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
<b>Rated Load UL, CUR Form A</b>	10 A at 28 VDC, 100k cycles 10 A at 277 VAC, 25k cycles
<b>Form C</b>	7 A at 28 VDC, 100k cycles 7 A at 277 VAC, 100k cycles 12 A at 125 VAC, 100k cycles (N.O.) 12 A at 125 VAC, 50k cycles (N.C.)
<b>VDE</b>	10 A at 250 VAC, 50k cycles (N.O.) 7 A at 250 VAC, 50k cycles (N.C.)
<b>Material</b>	Silver tin oxide
<b>Resistance</b>	<100 milliohms initially

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 1 x 10 <sup>7</sup> 1 x 10 <sup>5</sup> at 10A 250 VAC Res.
<b>Operate Time (typical)</b>	10 ms at nominal coil voltage
<b>Release Time (typical)</b>	5 ms at nominal coil voltage (with no coil suppression)
<b>Dielectric Strength (at sea level for 1 min.)</b>	3000 Vrms contact to coil 1000 Vrms across contacts
<b>Insulation Resistance</b>	100 megohms min. at 20°C, 500 VDC, 50% RH
<b>Insulation (according to DIN VDE 0110, IEC 60664-1)</b>	Overvoltage category: II Pollution degree: 2 Nominal voltage: 250 VAC
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature Operating Storage</b>	At nominal coil voltage Class B: -40°C(-40°F) to 70°C(158°F) Class F: -40°C(-40°F) to 85°C(185°F) -40°C(-40°F) to 105°C(221°F)
<b>Vibration</b>	0.062" (1.5 mm) DA at 10–55Hz
<b>Shock</b>	10 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	13 g
<b>Packing unit in pcs</b>	20 per plastic tube / 1000 per carton box

### COIL

<b>Power At Pickup Voltage (typical)</b>	230 mW
<b>Max Continuous Dissipation</b>	Class B: 1.7 W at 20°C (68°F) ambient Class F: 2.2 W at 20°C (68°F) ambient
<b>Temperature Rise</b>	25°C (45°F) at nominal coil voltage
<b>Temperature</b>	Class B: Max. 130°C (266°F) Class F: Max. 155°C (311°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Unsealed relays should not be dip cleaned.
4. Specifications subject to change without notice.

**ZETTLER electronics GmbH**

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0  
Fax +49 89 800 97 200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

# AZ942H

## RELAY ORDERING DATA


STANDARD RELAYS				ORDER NUMBER*	
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	Form A (SPST-N.O.)	Form C (SPDT)
3	2.4	6.5	25	AZ942H-1A-3DTH	AZ942H-1C-3DTH
5	4.0	11.0	70	AZ942H-1A-5DTH	AZ942H-1C-5DTH
6	4.8	13.0	100	AZ942H-1A-6DTH	AZ942H-1C-6DTH
9	7.2	20.0	225	AZ942H-1A-9DTH	AZ942H-1C-9DTH
12	9.6	26.0	400	AZ942H-1A-12DTH	AZ942H-1C-12DTH
18	14.4	39.0	900	AZ942H-1A-18DTH	AZ942H-1C-18DTH
24	19.2	52.0	1,600	AZ942H-1A-24DTH	AZ942H-1C-24DTH
48	38.4	104.0	6,200	AZ942H-1A-48DTH	AZ942H-1C-48DTH

\* Substitute "DETH" in place of "DTH" for epoxy sealed versions. To indicate Class F version, add suffix "F".

## IEEE STANDARD 587-1980 (ANSI/IEEE C62.41-1980) SURGE VOLTAGE WITHSTAND RATING

Test	Rating	Description
1.2 x 50 usec positive pulse	6 kV	Contact to coil - 5 pulses
1.2 X 50 usec negative pulse	6 kV	Contact to coil - 5 pulses
0.5 us 100 kHz ring wave	6 kV	Contact to coil - 5 waves

## MECHANICAL DATA

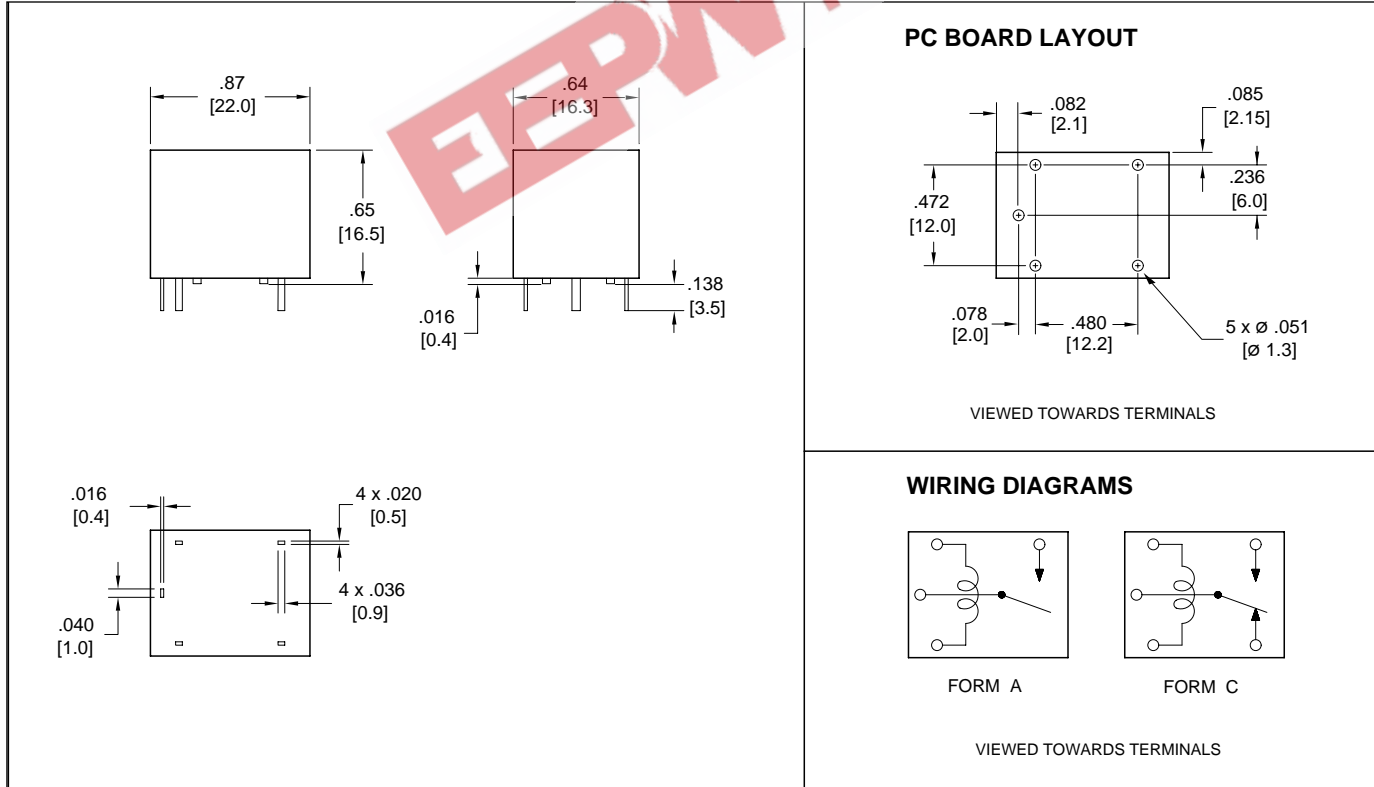

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm 0.010$ "

**ZETTLER electronics GmbH**

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com

2004-07-29