

# AZ850

## MICROMINIATURE POLARIZED RELAY

### FEATURES

- Microminiature size: Height: .197 inches (5 mm); Length: .551 inches (14 mm); Width: .354 inches (9 mm)
- High sensitivity, 79 mW pickup
- Monostable and bistable (latching) single coil and two coil versions available
- Meets FCC Part 68.302 1500 V lightning surge
- DIP terminal layout, fits 10 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- UL file E43203, CSA file 73363



### CONTACTS

<b>Arrangement</b>	DPDT (2 Form C) Bifurcated crossbar contacts
<b>Ratings</b>	Resistive load: Max. switched power: 30 W or 62.5 VA Max. switched current: 1 A Max. switched voltage: 220 VDC or 250 VAC Max. carry current: 2 A
<b>Rated Load UL/CSA</b>	1 A at 30 VDC 0.5 A at 125 VAC
<b>Material</b>	Silver palladium; gold clad
<b>Resistance</b>	< 50 milliohms initially

### COIL (Polarized)

<b>Power At Pickup Voltage (typical)</b>	Single side stable: 79–142 mW Bistable (latching) single coil: 56–84 mW Bistable (latching) two coil: 113–169 mW
<b>Max. Continuous Dissipation</b>	875 mW at 20°C (68°F) ambient
<b>Temperature Rise</b>	18°C (32°F) at nominal coil voltage
<b>Temperature</b>	Max. 105°C (221°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay has fixed coil polarity.
3. Relay may pull in with less than "Must Operate" value.
4. Relay adjustment may be affected if undue pressure is exerted on relay case.
5. For complete isolation between the relay's magnetic fields, it is recommended that a .197" (5.0 mm) space be provided between adjacent relays.
6. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy Mechanical Electrical</b>	Minimum operations 1 x 10 <sup>8</sup> 2 x 10 <sup>5</sup> at 1 A, 30 VDC 1 x 10 <sup>5</sup> at 0.5 A, 125VAC
<b>Operate Time (typical)</b>	2 ms at nominal coil voltage
<b>Release Time (typical)</b>	1 ms at nominal coil voltage (with no coil suppression)
<b>Set Time (bistable versions)</b>	2 ms at nominal coil voltage (typical)
<b>Reset Time (bistable versions)</b>	2 ms at nominal coil voltage (typical)
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Capacitance</b>	Contact to contact: 0.4 pF Contact set to contact set: 0.2 pF Contact to coil: 0.9 pF
<b>Dielectric Strength (at sea level)</b>	1000 Vrms between contact sets 1000 Vrms across contacts 1250 Vrms contact to coil Meets FCC part 68.302 1500 V lightning surge
<b>Insulation Resistance</b>	1000 megohms min. at 25°C, 500 VDC, 50% RH
<b>Ambient Temperature Operating Storage</b>	At nominal coil voltage -40°C (-40°F) to 70°C (158°F) -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	.130" DA at 10–55 Hz
<b>Shock</b>	50 g
<b>Enclosure</b>	LCP
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	250°C (482°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	1.5 grams

**ZETTLER** electronics

Logistic Design (UK) Limited. Unit 3, Eagle Centre Way, Luton LU4 9US www.zettlerrelay.com sales@zettlerrelay.com  
Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700

# AZ850

## RELAY ORDERING DATA

SINGLE SIDE STABLE				
COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	7.5	64.3	2.1	AZ850-3
4.5	11.25	145.2	3.15	AZ850-4.5
5	12.5	178	3.5	AZ850-5
6	15.0	257	4.2	AZ850-6
9	22.5	579	6.3	AZ850-9
12	30.0	1,028	8.4	AZ850-12
24	48.0	2,880	16.8	AZ850-24


  

BISTABLE (LATCHING) SINGLE COIL				
COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	8.7	90	2.1	AZ850P1-3
4.5	13.0	203	3.2	AZ850P1-4.5
5	14.5	250	3.5	AZ850P1-5
6	17.4	360	4.2	AZ850P1-6
9	26.1	810	6.3	AZ850P1-9
12	34.8	1440	8.4	AZ850P1-12
24	57.6	3840	16.8	AZ850P1-24

BISTABLE (LATCHING) TWO COIL					
COIL SPECIFICATIONS				ORDER NUMBER	
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$			Must Operate VDC
		Coil I	Coil II		
3	6.0	45	45	2.1	AZ850P2-3
4.5	13.0	102	102	3.2	AZ850P2-4.5
5	10.0	125	125	3.5	AZ850P2-5
6	12.0	180	180	4.2	AZ850P2-6
9	18.0	405	405	6.3	AZ850P2-9
12	24	720	720	8.4	AZ850P2-12
24	40	1,920	1,920	16.8	AZ850P2-24

## MECHANICAL DATA

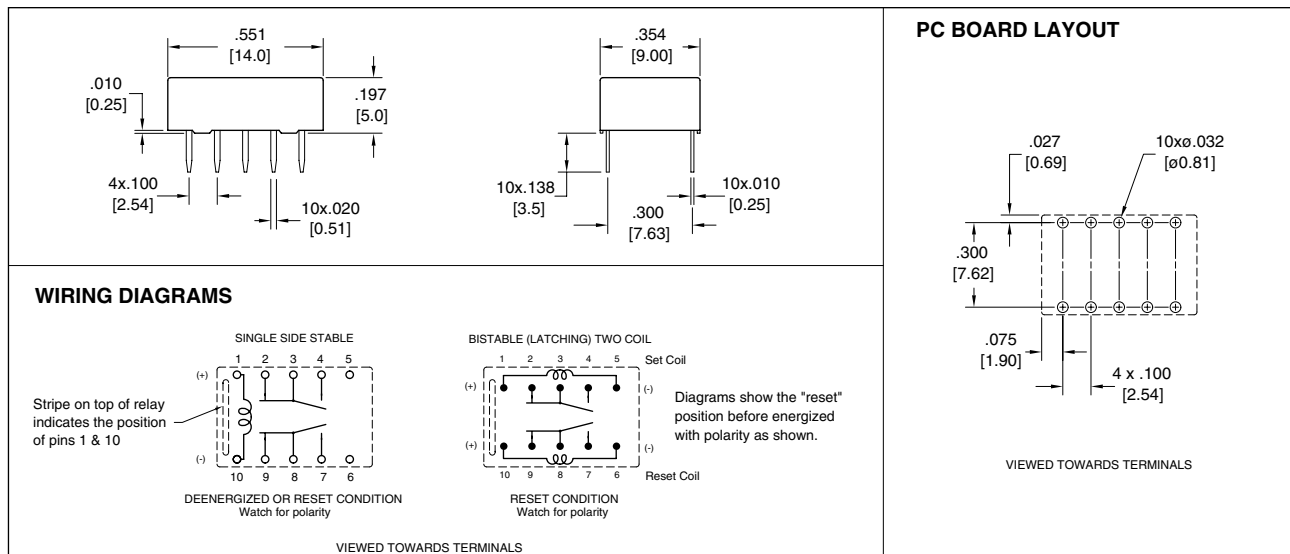

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm 0.010$ "

**ZETTLER electronics**

Logistic Design (UK) Limited. Unit 3, Eagle Centre Way, Luton LU4 9US www.zettlerrelay.com sales@zettlerrelay.com  
Telephone +44 (0) 1582 599 600 Fax +44 (0) 1582 599 700