

# K3620 • K3621

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN PhotoDarlington transistor in a 6-pin package.

### FEATURES


- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : Typ.500% (at  $I_F=1\text{mA}$ ,  $V_{CE}=2\text{V}$ )
- Electrical Isolation Voltage : AC2500V<sub>rms</sub>
- UL Recognized File No. E107486

### APPLICATIONS

- Interface between two circuits of different potential
- Telephone Line Receiver
- Automatic Vending Machine
- Power Supply Regulators

### DIMENSION

(Unit : mm)

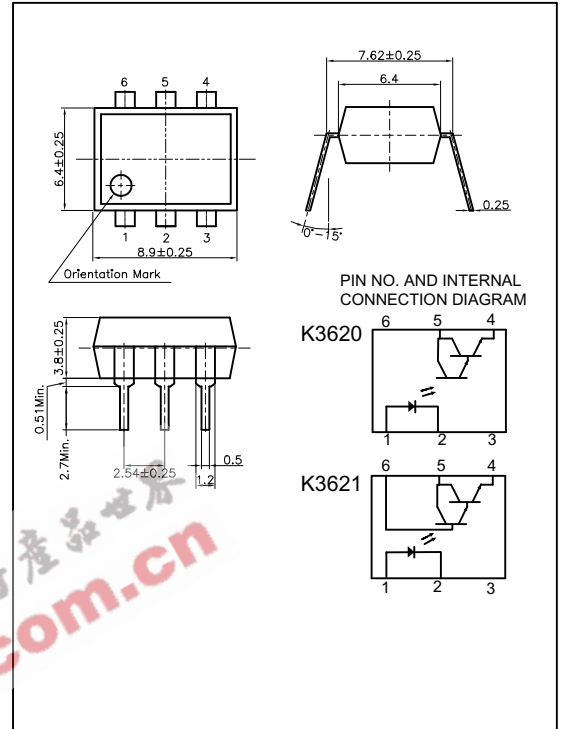

### MAXIMUM RATINGS

(  $T_a=25$  )

| Parameter                                       |                                     | Symbol     | Rating   | Unit             |
|---|-------------------------------------|------------|----------|------------------|
| Input   | Forward Current                     | $I_F$      | 60       | mA               |
|   | Reverse Voltage                     | $V_R$      | 5        | V                |
|   | Peak Forward Current <sup>*1</sup>  | $I_{FP}$   | 1        | A                |
|   | Power Dissipation                   | $P_D$      | 150      | mW               |
|   | Junction Temperature                | $T_J$      | 125      |                  |
| Output  | Collector-Emitter Breakdown Voltage | $BV_{CEO}$ | 35       | V                |
|   | Emitter-Collector Breakdown Voltage | $BV_{ECO}$ | 6        | V                |
|   | Collector-Base Breakdown Voltage**  | $BV_{CBO}$ | 35       | V                |
|   | Collector Current                   | $I_C$      | 50       | mA               |
|   | Collector Power Dissipation         | $P_C$      | 150      | mW               |
| Input to Output Isolation Voltage <sup>*2</sup> |                                     | $V_{iso}$  | AC2500   | V <sub>rms</sub> |
| Storage Temperature                             |                                     | $T_{stg}$  | -55~+125 |                  |
| Operating Temperature                           |                                     | $T_{opr}$  | -30~+100 |                  |
| Lead Soldering Temperature <sup>*3</sup>        |                                     | $T_{sol}$  | 260      |                  |
| Total Power Dissipation                         |                                     | $P_{tot}$  | 200      | mW               |

\*\* Except for K3620

\*1. Input current with 100 $\mu$ s pulse width, 1% duty cycle

\*2. Measured at RH=40~60% for 1min

\*3. 1/16 inch form case for 10sec

# K3620 • K3621

## ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 , unless otherwise noted)


| Parameter |                                      | Symbol               | Condition                                 | Min. | Typ.             | Max. | Unit. |
|-----------|--------------------------------------|----------------------|---|------|------------------|------|-------|
| Input     | Forward Voltage                      | V <sub>F</sub>       | I <sub>F</sub> =10mA                      | -    | 1.15             | 1.30 | V     |
|           | Reverse Current                      | I <sub>R</sub>       | V <sub>R</sub> =5V                        | -    | -                | 10   | μA    |
|           | Capacitance                          | C <sub>T</sub>       | V=0, f=1MHz                               | -    | 30               | -    | pF    |
| Output    | Collector-Emitter Breakdown Voltage  | BV <sub>CEO</sub>    | I <sub>C</sub> =1mA                       | 35   | -                | -    | V     |
|           | Emitter-Collector Breakdown Voltage  | BV <sub>ECO</sub>    | I <sub>E</sub> =0.1mA                     | 6    | -                | -    | V     |
|           | Collector-Base Breakdown Voltage **  | BV <sub>CBO</sub>    | I <sub>C</sub> =0.1mA                     | 35   | -                | -    | V     |
|           | Collector Dark Current               | I <sub>CEO</sub>     | I <sub>F</sub> =0, V <sub>CE</sub> =10V   | -    | -                | 100  | nA    |
|           | Capacitance                          | C <sub>CE</sub>      | V <sub>CE</sub> =0, f=1MHz                | -    | 10               | -    | pF    |
| Coupled   | Current Transfer Ratio *4            | CTR                  | I <sub>F</sub> =1mA, V <sub>CE</sub> =2V  | -    | 500              | -    | %     |
|           | Collector-Emitter Saturation Voltage | V <sub>CE(SAT)</sub> | I <sub>F</sub> =1mA, I <sub>C</sub> =2mA  | -    | 0.85             | 1.0  | V     |
|           | Input-Output Capacitance             | C <sub>IO</sub>      | V=0, f=1MHz                               | -    | 1                | -    | pF    |
|           | Input-Output Isolation Resistance    | R <sub>IO</sub>      | RH=40~60%, V=500V                         | -    | 10 <sup>11</sup> | -    |       |
|           | Rise Time                            | t <sub>r</sub>       | V <sub>CE</sub> =10V, R <sub>L</sub> =100 | -    | 100              | -    | μs    |
|           | Fall Time                            | t <sub>f</sub>       | I <sub>C</sub> =2mA                       | -    | 100              | -    | μs    |

\*\* Except for K3620


\*4. CTR=(I<sub>C</sub>/I<sub>F</sub>) X 100 (%)

**K3620 • K3621**


**Forward Current vs. Ambient Temperature**

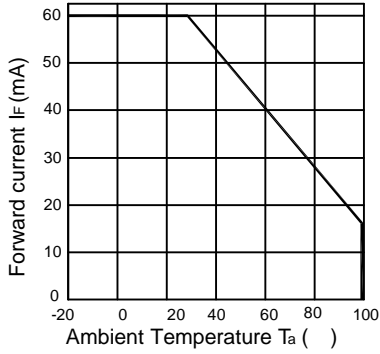


**Collector Power Dissipation vs. Ambient Temperature**

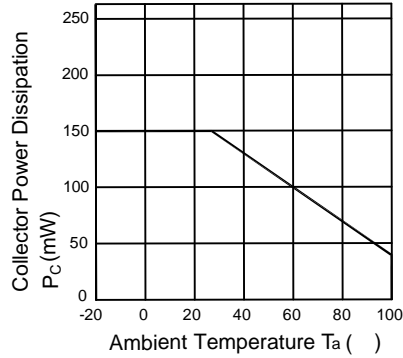


**Forward Current vs. Forward Voltage**

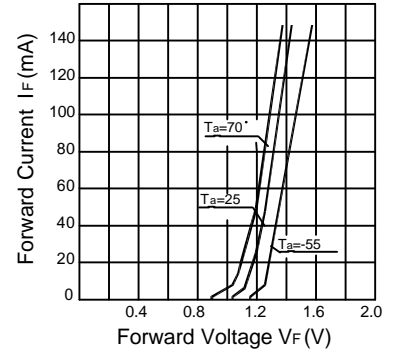


**Collector Current vs. Collector-Emitter Voltage**

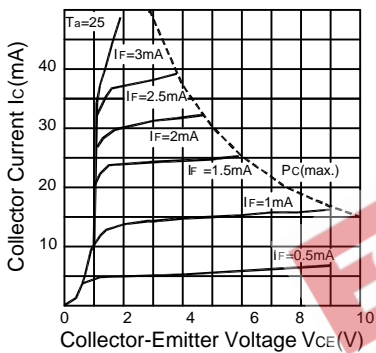

**Dark Current vs. Ambient Temperature**

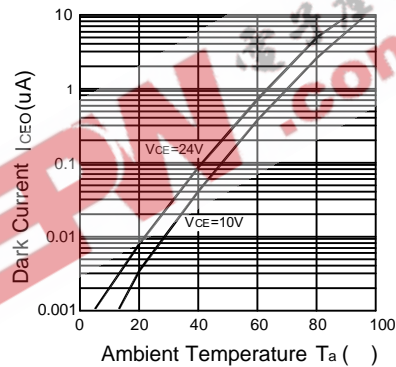

**Collector Current vs. Forward Current**

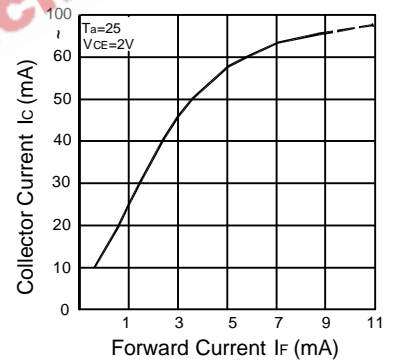

**Switching Time Test Circuit**

