


AZ822

SUBMINIATURE DIP RELAY

FEATURES

- Low profile for compact board spacing
- DC coils to 48 VDC
- Life expectancy to 10 million operations
- Standard PC 0.1" grid terminal spacing
- Fits standard 16 pin IC socket
- Epoxy sealed
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- UL, CUR file E43203

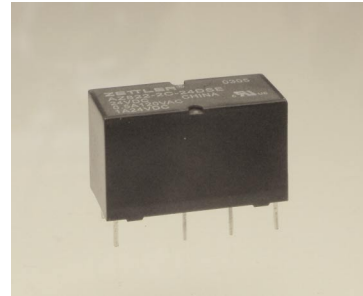

CONTACTS

Arrangement	DPDT (2 Form C) Bifurcated crossbar contacts
Ratings	Resistive load: Max. switched power: 60 W or 125 VA Max. switched current: 2 A Max. switched voltage: 220 VDC* or 250 VAC * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
Rated Load UL, CUR	1.0 A at 24 VDC 0.5 A at 120 VAC
Material	Silver palladium, gold clad
Resistance	< 50 milliohms initially

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁸ 5 x 10 ⁵ at 1 A 30 VDC (see table for additional figures)
Operate Time (typical)	5 ms at nominal coil voltage
Release Time (typical)	2 ms at nominal coil voltage (with no coil suppression)
Capacitance	Contact to contact: 1.2 pF Contact set to contact set: 1.6 pF Contact to coil: 1.5 pF
Bounce (typical)	At 10 mA contact current 2 ms at operate N.O. side 3 ms at operate N.C. side
Dielectric Strength (at sea level for 1 min.)	1000 Vrms contact to coil 1000 Vrms contact to contact 1000 Vrms between contact sets
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -55°C (-67°F) to 90°C (194°F) -55°C (-67°F) to 105°C (221°F)
Vibration	0.062" (1.5 mm) DA at 10–55 Hz
Shock	20 g
Enclosure	P.B.T. polyester (UL94 V-0)
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	4.5 grams
Packing unit in pcs	20 per plastic tube / 1000 per carton box

COIL

Power At Pickup Voltage (typical)	74 mW 3 - 12 V coils 98 mW 15 - 24 V coils 147 mW 48 V coils
Max. Continuous Dissipation	0.94 W at 20°C (68°F)
Temperature Rise	15°C (27°F) at nominal coil voltage
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Relay adjustment may be affected if undue pressure is exerted on relay case.
4. Specifications subject to change without notice.

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0
Fax +49 89 800 97 200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

2004-08-22
China

AZ822

RELAY ORDERING DATA

COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	
3	2.1	7.5	60	AZ822-2C-3DSE
5	3.5	12.5	167	AZ822-2C-5DSE
6	4.2	15.0	240	AZ822-2C-6DSE
9	6.3	22.5	540	AZ822-2C-9DSE
12	8.4	30.0	960	AZ822-2C-12DSE
18	12.6	40.0	1,620	AZ822-2C-18DSE
24	16.8	52.9	2,880	AZ822-2C-24DSE
48	33.6	84.9	7,680	AZ822-2C-48DSE

MECHANICAL DATA

PC BOARD LAYOUT

Viewed toward terminals

WIRING DIAGRAM


Viewed toward terminals

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010''$

TYPICAL CONTACT LIFE EXPECTANCY

VOLTAGE	CURRENT	NUMBER OF OPERATIONS	
		RESISTIVE LOAD	INDUCTIVE LOAD
50 mV	1 mA	1×10^7	1×10^7
30 VDC	1 A	5×10^5	15×10^4
30 VDC	0.7 A	1×10^6	3×10^5
30 VDC	0.3 A	3×10^6	1×10^6
60 VDC	0.5 A	5×10^5	—
60 VDC	0.3 A	1×10^6	—
60 VDC	0.2 A	3×10^6	—
30 VAC	2 A	5×10^5	15×10^4
30 VAC	1.3 A	1×10^6	3×10^5
30 VAC	0.7 A	3×10^6	1×10^6
60 VAC	1 A	5×10^5	15×10^4
60 VAC	0.7 A	1×10^6	3×10^5
60 VAC	0.3 A	3×10^6	1×10^6
125 VAC	0.5 A	5×10^5	15×10^4
125 VAC	0.3 A	1×10^6	3×10^5
125 VAC	0.2 A	3×10^6	1×10^6

Maximum Switching Capacity

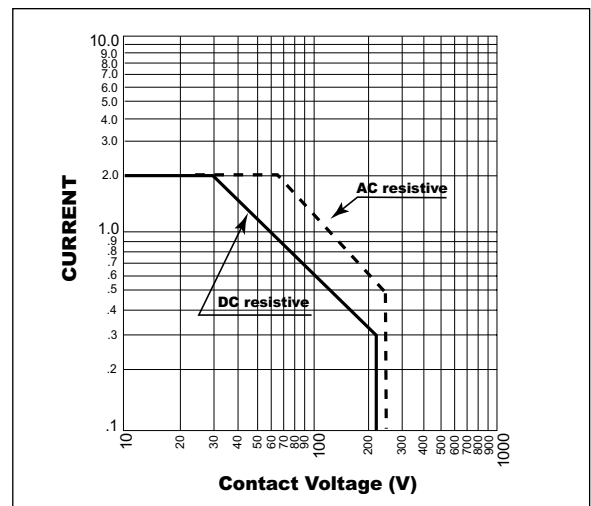

- NOTES:
- Relays operated at nominal coil voltage.
 - Inductive load tests are at 0.7 power factor.
 - Table represents typical life figures and are not guaranteed minimums.

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0
Fax +49 89 800 97 200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

2004-08-22
China