




ST180CPbF Series

Vishay High Power Products

Phase Control Thyristors (Hockey PUK Version), 350 A

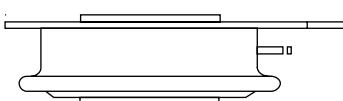

TO-200AB (A-PUK)

FEATURES

- Center amplifying gate
- Metal case with ceramic insulator
- International standard case TO-200AB (A-PUK)
- Lead (Pb)-free
- Designed and qualified for industrial level

RoHS
COMPLIANT

PRODUCT SUMMARY

$I_{T(AV)}$	350 A
-------------	-------

TYPICAL APPLICATIONS

- DC motor controls
- Controlled DC power supplies
- AC controllers

MAJOR RATINGS AND CHARACTERISTICS

PARAMETER	TEST CONDITIONS	VALUES	UNITS
$I_{T(AV)}$		350	A
	T_{hs}	55	°C
$I_{T(RMS)}$		660	A
	T_{hs}	25	°C
I_{TSM}	50 Hz	5000	A
	60 Hz	5230	
I^2t	50 Hz	125	kA ² s
	60 Hz	114	
V_{DRM}/V_{RRM}		400 to 2000	V
t_q	Typical	100	μs
T_J		- 40 to 125	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V_{DRM}/V_{RRM} , MAXIMUM REPETITIVE PEAK AND OFF-STATE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK VOLTAGE V	I_{DRM}/I_{RRM} MAXIMUM AT $T_J = T_{J\text{MAX}}$ mA
ST180C..C	04	400	500	30
	08	800	900	
	12	1200	1300	
	16	1600	1700	
	18	1800	1900	
	20	2000	2100	

ST180CPbF Series

Vishay High Power Products Phase Control Thyristors
(Hockey PUK Version), 350 A



ABSOLUTE MAXIMUM RATINGS							
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS	
Maximum average on-state current at heatsink temperature	$I_{T(AV)}$	180° conduction, half sine wave double side (single side) cooled			350 (140)	A	
					55 (85)	°C	
Maximum RMS on-state current	$I_{T(RMS)}$	DC at 25 °C heatsink temperature double side cooled			660	A	
Maximum peak, one-cycle non-repetitive surge current	I_{TSM}	$t = 10 \text{ ms}$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	5000		
		$t = 8.3 \text{ ms}$	5230				
		$t = 10 \text{ ms}$	100 % V_{RRM} reapplied		4200		
		$t = 8.3 \text{ ms}$	4400				
Maximum I^2t for fusing	I^2t	$t = 10 \text{ ms}$	No voltage reapplied		125	kA ² s	
		$t = 8.3 \text{ ms}$	114				
		$t = 10 \text{ ms}$	100 % V_{RRM} reapplied		88		
		$t = 8.3 \text{ ms}$	81				
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1 \text{ to } 10 \text{ ms}$, no voltage reapplied			1250	kA ² \sqrt{s}	
Low level value of threshold voltage	$V_{T(TO)1}$	$(16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J$ maximum			1.08	V	
High level value of threshold voltage	$V_{T(TO)2}$	$(I > \pi \times I_{T(AV)})$, $T_J = T_J$ maximum			1.14		
Low level value of on-state slope resistance	r_{t1}	$(16.7 \% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J$ maximum			1.18	mΩ	
High level value of on-state slope resistance	r_{t2}	$(I > \pi \times I_{T(AV)})$, $T_J = T_J$ maximum			1.14		
Maximum on-state voltage	V_{TM}	$I_{pk} = 750 \text{ A}$, $T_J = T_J$ maximum, $t_p = 10 \text{ ms}$ sine pulse			1.96	V	
Maximum holding current	I_H	$T_J = 25 \text{ °C}$, anode supply 12 V resistive load			600	mA	
Maximum (typical) latching current	I_L				1000 (300)		

SWITCHING						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS
Maximum non-repetitive rate of rise of turned-on current	dl/dt	$T_J = T_J$ maximum, anode voltage $\leq 80 \% V_{DRM}$			1000	A/μs
Typical delay time	t_d	$V_d = 0.67 \% V_{DRM}$, $T_J = 25 \text{ °C}$			1.0	μs
Typical turn-off time	t_q	$I_{TM} = 300 \text{ A}$, $T_J = T_J$ maximum, $dl/dt = 20 \text{ A}/\mu\text{s}$, $V_R = 50 \text{ V}$, $dV/dt = 20 \text{ V}/\mu\text{s}$, gate 0 V 100 Ω, $t_p = 500 \mu\text{s}$			100	

BLOCKING						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNITS
Maximum critical rate of rise of off-state voltage	dV/dt	$T_J = T_J$ maximum linear to 80 % rated V_{DRM}			500	V/μs
Maximum peak reverse and off-state leakage current	I_{RRM} , I_{DRM}	$T_J = T_J$ maximum, rated V_{DRM}/V_{RRM} applied			30	mA



ST180CPbF Series

Phase Control Thyristors Vishay High Power Products
(Hockey PUK Version), 350 A

TRIGGERING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	
		TYP.	MAX.	UNITS	
Maximum peak gate power	P _{GM}	T _J = T _J maximum, t _p ≤ 5 ms		10	W
Maximum average gate power	P _{G(AV)}	T _J = T _J maximum, f = 50 Hz, d% = 50		2.0	
Maximum peak positive gate current	I _{GM}	T _J = T _J maximum, t _p ≤ 5 ms		3.0	A
Maximum peak positive gate voltage	+ V _{GM}			20	V
Maximum peak negative gate voltage	- V _{GM}			5.0	
DC gate current required to trigger	I _{GT}	T _J = - 40 °C	Maximum required gate trigger/current/voltage are the lowest value which will trigger all units 12 V anode to cathode applied	180	-
		T _J = 25 °C		90	150
		T _J = 125 °C		40	-
DC gate voltage required to trigger	V _{GT}	T _J = - 40 °C		2.9	-
		T _J = 25 °C		1.8	3.0
		T _J = 125 °C		1.2	-
DC gate current not to trigger	I _{GD}	T _J = T _J maximum	Maximum gate current/voltage not to trigger is the maximum value which will not trigger any unit with rated V _{DRM} anode to cathode applied	10	mA
DC gate voltage not to trigger	V _{GD}			0.25	V

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum operating junction temperature range	T _J			- 40 to 125	°C
Maximum storage temperature range	T _{Stg}			- 40 to 150	
Maximum thermal resistance, junction to heatsink	R _{thJ-hs}	DC operation single side cooled		0.17	K/W
		DC operation double side cooled		0.08	
Maximum thermal resistance, case to heatsink	R _{thC-hs}	DC operation single side cooled		0.033	
		DC operation double side cooled		0.017	
Mounting force, ± 10 %				4900 (500)	N (kg)
Approximate weight				50	g
Case style		See dimensions - link at the end of datasheet		TO-200AB (A-PUK)	

ΔR _{thJC} CONDUCTION						
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION		RECTANGULAR CONDUCTION		TEST CONDITIONS	UNITS
	SINGLE SIDE	DOUBLE SIDE	SINGLE SIDE	DOUBLE SIDE		
180°	0.015	0.015	0.011	0.011	T _J = T _J maximum	K/W
120°	0.018	0.019	0.019	0.019		
90°	0.024	0.024	0.026	0.026		
60°	0.035	0.035	0.036	0.037		
30°	0.060	0.060	0.060	0.061		

Note

- The table above shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

ST180CPbF Series

Vishay High Power Products Phase Control Thyristors
(Hockey PUK Version), 350 A

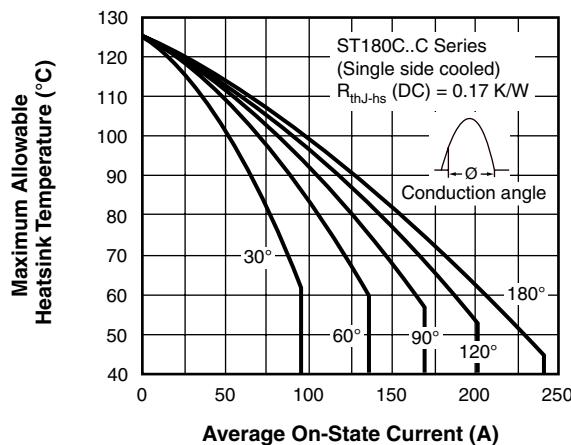


Fig. 1 - Current Ratings Characteristics

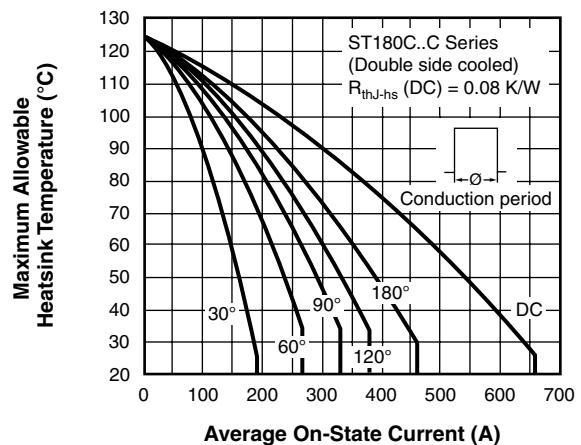


Fig. 4 - Current Ratings Characteristics

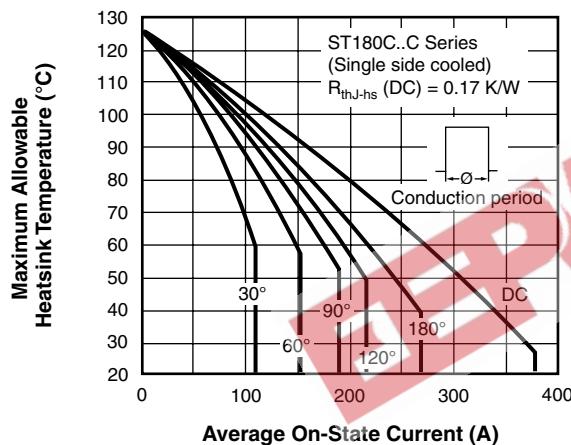


Fig. 2 - Current Ratings Characteristics

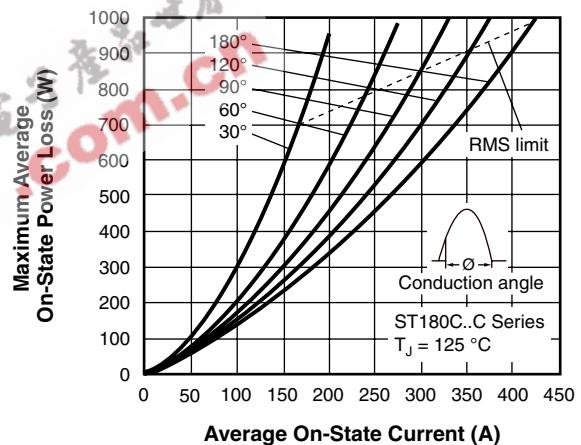


Fig. 5 - On-State Power Loss Characteristics

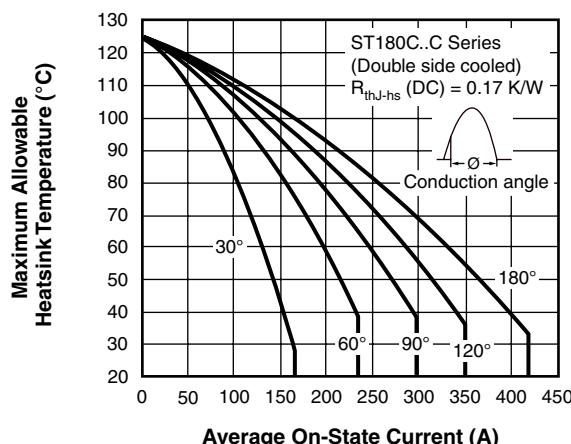


Fig. 3 - Current Ratings Characteristics

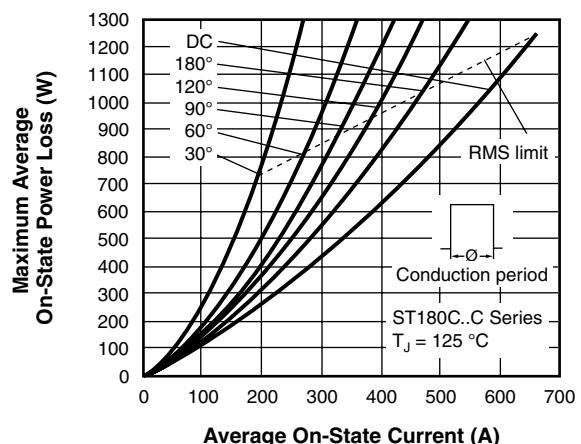


Fig. 6 - On-State Power Loss Characteristics

Phase Control Thyristors
Vishay High Power Products
(Hockey PUK Version), 350 A

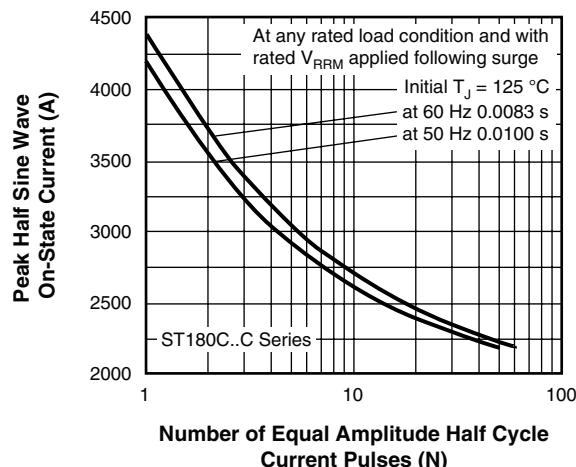


Fig. 7 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

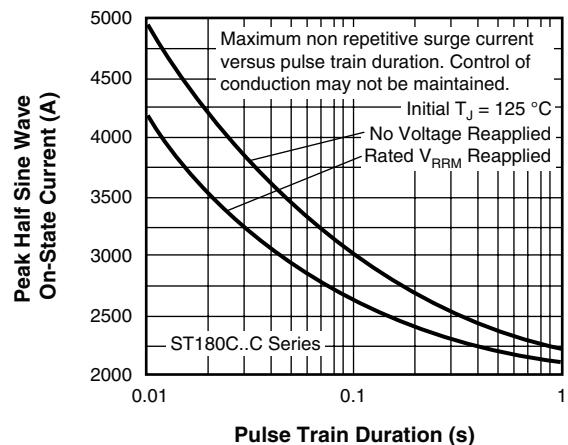


Fig. 8 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

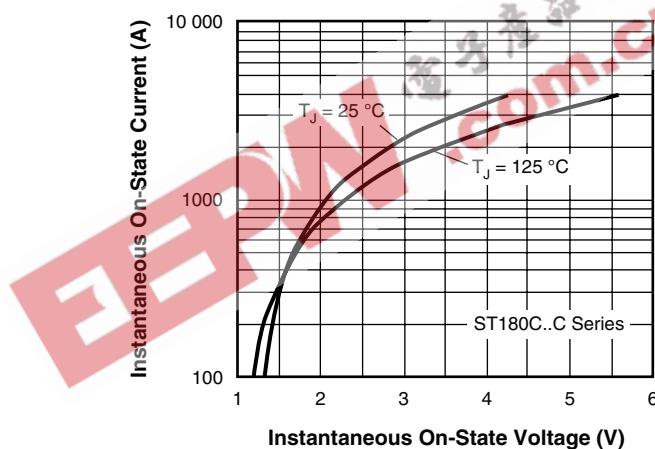


Fig. 9 - On-State Voltage Drop Characteristics

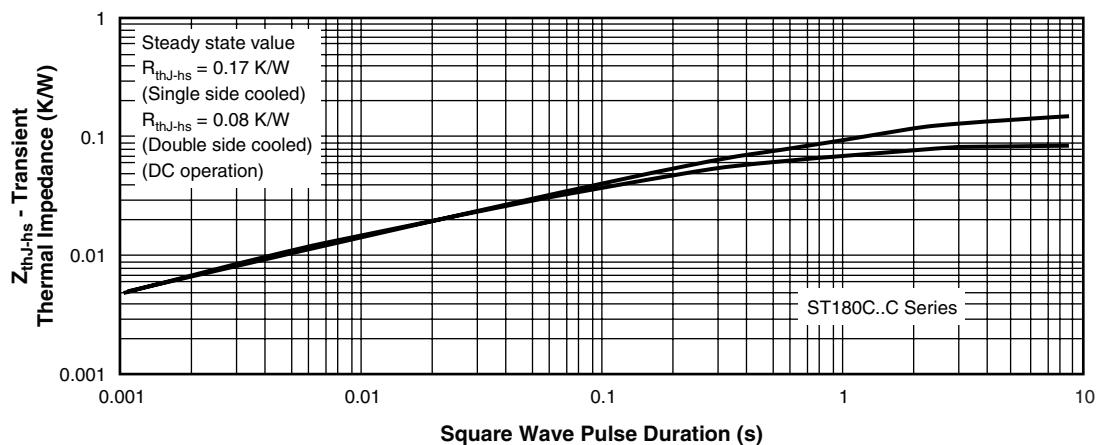


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

ST180CPbF Series

Vishay High Power Products Phase Control Thyristors
(Hockey PUK Version), 350 A

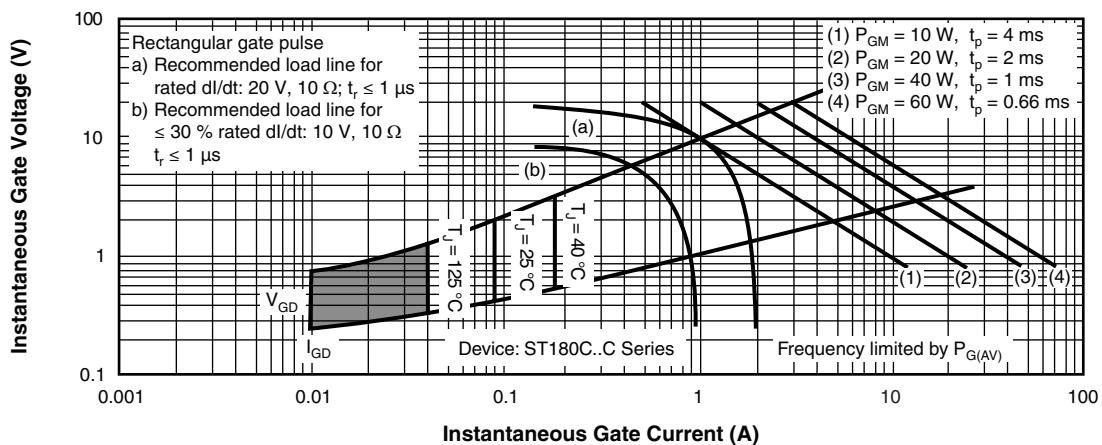


Fig. 11 - Gate Characteristics

ORDERING INFORMATION TABLE

Device code	ST	18	0	C	20	C	1	-	PbF
	1	2	3	4	5	6	7	8	9

- [1]** - Thyristor
- [2]** - Essential part number
- [3]** - 0 = Converter grade
- [4]** - C = Ceramic PUK
- [5]** - Voltage code x 100 = V_{RRM} (see Voltage Ratings table)
- [6]** - C = PUK case TO-200AB (A-PUK)
- [7]** - 0 = Eyelet terminals (gate and auxiliary cathode unsoldered leads)
1 = Fast-on terminals (gate and auxiliary cathode unsoldered leads)
2 = Eyelet terminals (gate and auxiliary cathode soldered leads)
3 = Fast-on terminals (gate and auxiliary cathode soldered leads)
- [8]** - Critical dV/dt: • None = 500 V/μs (standard selection)
• L = 1000 V/μs (special selection)
- [9]** - Lead (Pb)-free

LINKS TO RELATED DOCUMENTS	
Dimensions	http://www.vishay.com/doc?95074



Legal Disclaimer Notice

Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.