

Silicon Epitaxial Planar Z-Diodes

Features

- Very sharp reverse characteristic
- Low reverse current level
- Very high stability
- Low noise
- Available with tighter tolerances



94 9367

Applications

Voltage stabilization

Absolute Maximum Ratings

$T_j = 25^\circ\text{C}$

| Parameter | Test Conditions | Type | Symbol | Value | Unit |
|---------------------------|--------------------------------------|------|------------------|------------|------------------|
| Power dissipation | $l=4\text{mm}, T_L=25^\circ\text{C}$ | | P_V | 500 | mW |
| Z-current | | | I_Z | P_V/V_Z | mA |
| Junction temperature | | | T_j | 175 | $^\circ\text{C}$ |
| Storage temperature range | | | T_{stg} | -65...+175 | $^\circ\text{C}$ |

Maximum Thermal Resistance

$T_j = 25^\circ\text{C}$

| Parameter | Test Conditions | Symbol | Value | Unit |
|------------------|-------------------------------------|-------------------|-------|------|
| Junction ambient | $l=4\text{mm}, T_L=\text{constant}$ | R_{thJA} | 300 | K/W |

Electrical Characteristics

$T_j = 25^\circ\text{C}$

| Parameter | Test Conditions | Type | Symbol | Min | Typ | Max | Unit |
|-----------------|--------------------|------|--------|-----|-----|-----|------|
| Forward voltage | $I_F=200\text{mA}$ | | V_F | | | 1.5 | V |

| Type | V _{Znom} | I _{ZT} | for V _{ZT} and | r _{ZT} | r _{ZIK} at I _{ZK} | I _R and I _R at V _R | | | TK _{VZ} | |
|-----------|-------------------|-----------------|-------------------------|-----------------|-------------------------------------|---|-------|------------------|------------------|----------------|
| BZX55C... | V | mA | V ¹⁾ | Ω | Ω | mA | μA | μA ²⁾ | V | %/K |
| 2V4 | 2.4 | 5 | 2.28 to 2.56 | < 85 | < 600 | 1 | < 50 | < 100 | 1 | -0.09 to -0.06 |
| 2V7 | 2.7 | 5 | 2.5 to 2.9 | < 85 | < 600 | 1 | < 10 | < 50 | 1 | -0.09 to -0.06 |
| 3V0 | 3.0 | 5 | 2.8 to 3.2 | < 85 | < 600 | 1 | < 4 | < 40 | 1 | -0.08 to -0.05 |
| 3V3 | 3.3 | 5 | 3.1 to 3.5 | < 85 | < 600 | 1 | < 2 | < 40 | 1 | -0.08 to -0.05 |
| 3V6 | 3.6 | 5 | 3.4 to 3.8 | < 85 | < 600 | 1 | < 2 | < 40 | 1 | -0.08 to -0.05 |
| 3V9 | 3.9 | 5 | 3.7 to 4.1 | < 85 | < 600 | 1 | < 2 | < 40 | 1 | -0.08 to -0.05 |
| 4V3 | 4.3 | 5 | 4.0 to 4.6 | < 75 | < 600 | 1 | < 1 | < 20 | 1 | -0.06 to -0.03 |
| 4V7 | 4.7 | 5 | 4.4 to 5.0 | < 60 | < 600 | 1 | < 0.5 | < 10 | 1 | -0.05 to +0.02 |
| 5V1 | 5.1 | 5 | 4.8 to 5.4 | < 35 | < 550 | 1 | < 0.1 | < 2 | 1 | -0.02 to +0.02 |
| 5V6 | 5.6 | 5 | 5.2 to 6.0 | < 25 | < 450 | 1 | < 0.1 | < 2 | 1 | -0.05 to +0.05 |
| 6V2 | 6.2 | 5 | 5.8 to 6.6 | < 10 | < 200 | 1 | < 0.1 | < 2 | 2 | 0.03 to 0.06 |
| 6V8 | 6.8 | 5 | 6.4 to 7.2 | < 8 | < 150 | 1 | < 0.1 | < 2 | 3 | 0.03 to 0.07 |
| 7V5 | 7.5 | 5 | 7.0 to 7.9 | < 7 | < 50 | 1 | < 0.1 | < 2 | 5 | 0.03 to 0.07 |
| 8V2 | 8.2 | 5 | 7.7 to 8.7 | < 7 | < 50 | 1 | < 0.1 | < 2 | 6.2 | 0.03 to 0.08 |
| 9V1 | 9.1 | 5 | 8.5 to 9.6 | < 10 | < 50 | 1 | < 0.1 | < 2 | 6.8 | 0.03 to 0.09 |
| 10 | 10 | 5 | 9.4 to 10.6 | < 15 | < 70 | 1 | < 0.1 | < 2 | 7.5 | 0.03 to 0.1 |
| 11 | 11 | 5 | 10.4 to 11.6 | < 20 | < 70 | 1 | < 0.1 | < 2 | 8.2 | 0.03 to 0.11 |
| 12 | 12 | 5 | 11.4 to 12.7 | < 20 | < 90 | 1 | < 0.1 | < 2 | 9.1 | 0.03 to 0.11 |
| 13 | 13 | 5 | 12.4 to 14.1 | < 26 | < 110 | 1 | < 0.1 | < 2 | 10 | 0.03 to 0.11 |
| 15 | 15 | 5 | 13.8 to 15.6 | < 30 | < 110 | 1 | < 0.1 | < 2 | 11 | 0.03 to 0.11 |
| 16 | 16 | 5 | 15.3 to 17.1 | < 40 | < 170 | 1 | < 0.1 | < 2 | 12 | 0.03 to 0.11 |
| 18 | 18 | 5 | 16.8 to 19.1 | < 50 | < 170 | 1 | < 0.1 | < 2 | 13 | 0.03 to 0.11 |
| 20 | 20 | 5 | 18.8 to 21.2 | < 55 | < 220 | 1 | < 0.1 | < 2 | 15 | 0.03 to 0.11 |
| 22 | 22 | 5 | 20.8 to 23.3 | < 55 | < 220 | 1 | < 0.1 | < 2 | 16 | 0.04 to 0.12 |
| 24 | 24 | 5 | 22.8 to 25.6 | < 80 | < 220 | 1 | < 0.1 | < 2 | 18 | 0.04 to 0.12 |
| 27 | 27 | 5 | 25.1 to 28.9 | < 80 | < 220 | 1 | < 0.1 | < 2 | 20 | 0.04 to 0.12 |
| 30 | 30 | 5 | 28 to 32 | < 80 | < 220 | 1 | < 0.1 | < 2 | 22 | 0.04 to 0.12 |
| 33 | 33 | 5 | 31 to 35 | < 80 | < 220 | 1 | < 0.1 | < 2 | 24 | 0.04 to 0.12 |
| 36 | 36 | 5 | 34 to 38 | < 80 | < 220 | 1 | < 0.1 | < 2 | 27 | 0.04 to 0.12 |
| 39 | 39 | 2.5 | 37 to 41 | < 90 | < 500 | 0.5 | < 0.1 | < 5 | 30 | 0.04 to 0.12 |
| 43 | 43 | 2.5 | 40 to 46 | < 90 | < 600 | 0.5 | < 0.1 | < 5 | 33 | 0.04 to 0.12 |
| 47 | 47 | 2.5 | 44 to 50 | < 110 | < 700 | 0.5 | < 0.1 | < 5 | 36 | 0.04 to 0.12 |
| 51 | 51 | 2.5 | 48 to 54 | < 125 | < 700 | 0.5 | < 0.1 | < 10 | 39 | 0.04 to 0.12 |
| 56 | 56 | 2.5 | 52 to 60 | < 135 | < 1000 | 0.5 | < 0.1 | < 10 | 43 | 0.04 to 0.12 |
| 62 | 62 | 2.5 | 58 to 66 | < 150 | < 1000 | 0.5 | < 0.1 | < 10 | 47 | 0.04 to 0.12 |
| 68 | 68 | 2.5 | 64 to 72 | < 200 | < 1000 | 0.5 | < 0.1 | < 10 | 51 | 0.04 to 0.12 |
| 75 | 75 | 2.5 | 70 to 79 | < 250 | < 1500 | 0.5 | < 0.1 | < 10 | 56 | 0.04 to 0.12 |

1) Tighter tolerances available on request:

BZX55A... ± 1% of V_{Znom}

BZX55B... ± 2% of V_{Znom}

BZX55F... ± 3% of V_{Znom}

2) at T_j = 150 °C

Characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)

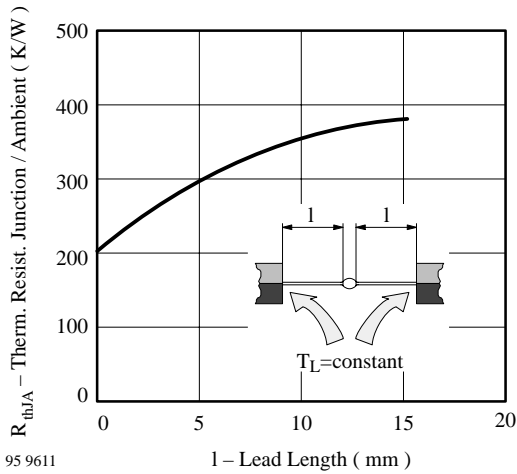


Figure 1. Thermal Resistance vs. Lead Length

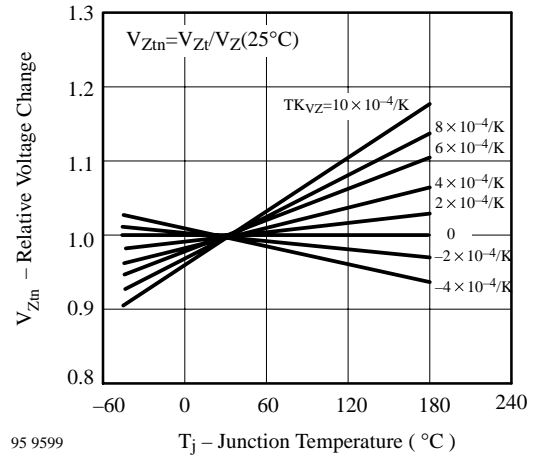


Figure 4. Typical Change of Working Voltage vs. Junction Temperature

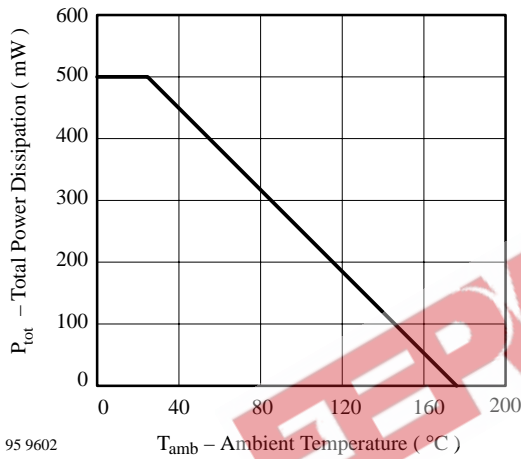


Figure 2. Total Power Dissipation vs. Ambient Temperature

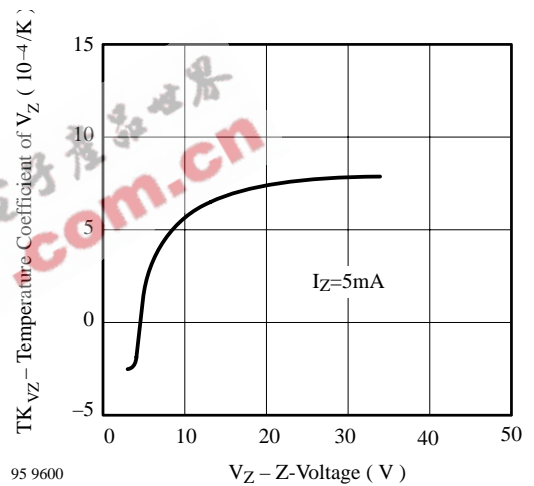


Figure 5. Temperature Coefficient of V_Z vs. Z-Voltage

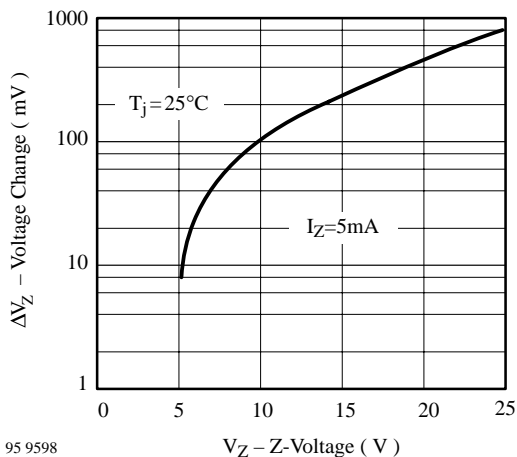


Figure 3. Typical Change of Working Voltage under Operating Conditions at $T_{amb}=25^\circ\text{C}$

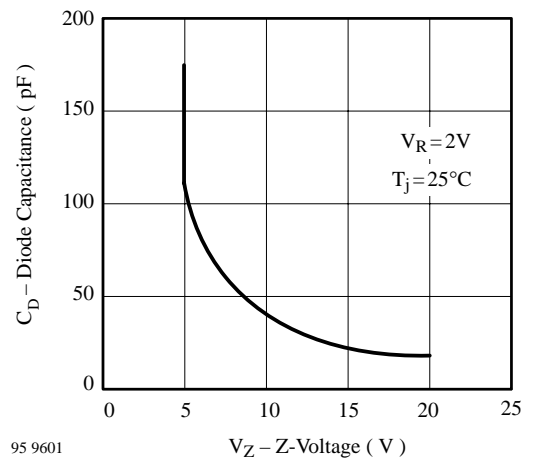


Figure 6. Diode Capacitance vs. Z-Voltage



Figure 7. Forward Current vs. Forward Voltage



Figure 9. Z-Current vs. Z-Voltage



Figure 8. Z-Current vs. Z-Voltage




Figure 10. Differential Z-Resistance vs. Z-Voltage




Figure 11. Thermal Response

Dimensions in mm


 technical drawings
 according to DIN
 specifications

94 9366

Standard Glass Case
 54 A 2 DIN 41880
 JEDEC DO 35
 Weight max. 0.3 g

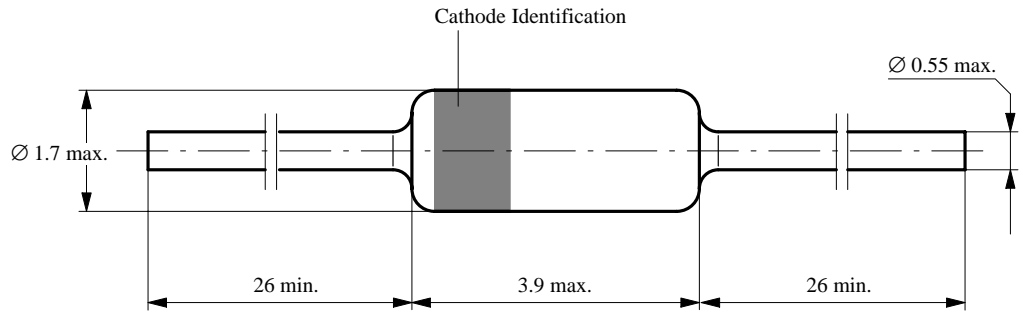

EEPW 电子产品世界
 .com.cn

Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

EEPW.com.cn
电子产业世界

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0) 7131 67 2831, Fax number: 49 (0) 7131 67 2423