

## CD4047BM/CD4047BC Low Power Monostable/Astable Multivibrator

### General Description

CD4047B is capable of operating in either the monostable or astable mode. It requires an external capacitor (between pins 1 and 3) and an external resistor (between pins 2 and 3) to determine the output pulse width in the monostable mode, and the output frequency in the astable mode.

Astable operation is enabled by a high level on the astable input or low level on the astable input. The output frequency (at 50% duty cycle) at Q and  $\bar{Q}$  outputs is determined by the timing components. A frequency twice that of Q is available at the Oscillator Output; a 50% duty cycle is not guaranteed.

Monostable operation is obtained when the device is triggered by low-to-high transition at + trigger input or high-to-low transition at - trigger input. The device can be retriggered by applying a simultaneous low-to-high transition to both the + trigger and retrigger inputs.

A high level on Reset input resets the outputs Q to low,  $\bar{Q}$  to high.


### Features

- Wide supply voltage range                          3.0V to 15V
- High noise immunity                                0.45 V<sub>DD</sub> (typ.)
- Low power TTL                                        Fan out of 2 driving 74L
- compatibility                                        or 1 driving 74LS


### SPECIAL FEATURES

- Low power consumption: special CMOS oscillator configuration
- Monostable (one-shot) or astable (free-running) operation
- True and complemented buffered outputs
- Only one external R and C required

### Block and Connection Diagrams

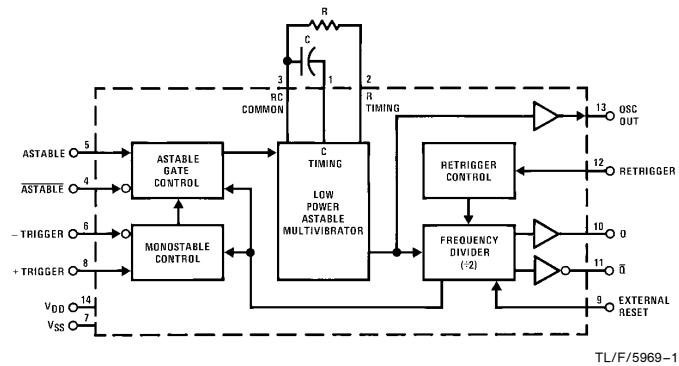

**Dual-In-Line Package**

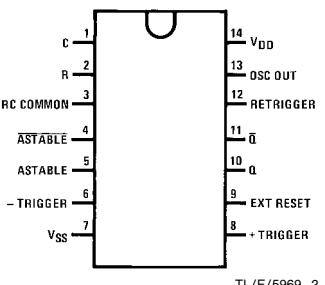

**Top View**

**Order Number CD4047B**

<b>Absolute Maximum Ratings</b> (Notes 1 and 2)									
If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.									
DC Supply Voltage ( $V_{DD}$ )	−0.5V to +18V <sub>DC</sub>						3V to 15V <sub>DC</sub>		
Input Voltage ( $V_{IN}$ )	−0.5V to $V_{DD}$ + 0.5V <sub>DC</sub>						0 to $V_{DD}$ V <sub>DC</sub>		
Storage Temperature Range ( $T_s$ )	−65°C to +150°C						−55°C to +125°C		
Power Dissipation ( $P_D$ )							−40°C to +85°C		
Dual-In-Line	700 mW								
Small Outline	500 mW								
Lead Temperature ( $T_L$ ) (Soldering, 10 seconds)	260°C								
<b>DC Electrical Characteristics</b> CD4047BM (Note 2)									
Symbol	Parameter	Conditions	−55°C		25°C			125°C	Units
			Min	Max	Min	Typ	Max	Min	
I <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		5 10 20			5 10 20		150 300 600 μA
V <sub>OL</sub>	Low Level Output Voltage	I <sub>O</sub>   < 1 μA $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05 V
V <sub>OH</sub>	High Level Output Voltage	I <sub>O</sub>   < 1 μA $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95	V V V
V <sub>IL</sub>	Low Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V $V_{DD} = 10V, V_O = 1V$ or 9V $V_{DD} = 15V, V_O = 1.5V$ or 13.5V		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0 V
V <sub>IH</sub>	High Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or 4.5V $V_{DD} = 10V, V_O = 1V$ or 9V $V_{DD} = 15V, V_O = 1.5V$ or 13.5V	3.5 7.0 11.0		3.5 7.0 11.0	2.75 5.5 8.25		3.5 7.0 11.0	V V V
I <sub>OL</sub>	Low Level Output Current (Note 3)	$V_{DD} = 5V, V_O = 0.4V$ $V_{DD} = 10V, V_O = 0.5V$ $V_{DD} = 15V, V_O = 1.5V$	0.64 1.6 4.2		0.51 1.3 3.4	0.88 2.25 8.8		0.36 0.9 2.4	mA mA mA
I <sub>OH</sub>	High Level Output Current (Note 3)	$V_{DD} = 5V, V_O = 4.6V$ $V_{DD} = 10V, V_O = 9.5V$ $V_{DD} = 15V, V_O = 13.5V$	−0.64 −1.6 −4.2		−0.51 −1.3 −3.4	−0.88 −2.25 −8.8		−0.36 −0.9 −2.4	mA mA mA
I <sub>IN</sub>	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		−0.1 0.1		−10 <sup>−5</sup> 10 <sup>−5</sup>	−0.1 0.1		−1.0 1.0 μA
<b>DC Electrical Characteristics</b> CD4047BC (Note 2)									
Symbol	Parameter	Conditions	−40°C		25°C			85°C	Units
			Min	Max	Min	Typ	Max	Min	
I <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		20 40 80			20 40 80		150 300 600 μA
V <sub>OL</sub>	Low Level Output Voltage	I <sub>O</sub>   < 1 μA $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		V V V
V <sub>OH</sub>	High Level Output Voltage	I <sub>O</sub>   < 1 μA $V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95	V V V

## DC Electrical Characteristics CD4047BC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		25°C			85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
V <sub>IL</sub>	Low Level Input Voltage	V <sub>DD</sub> = 5V, V <sub>O</sub> = 0.5V or 4.5V V <sub>DD</sub> = 10V, V <sub>O</sub> = 1V or 9V V <sub>DD</sub> = 15V, V <sub>O</sub> = 1.5V or 13.5V		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0	V
V <sub>IH</sub>	High Level Input Voltage	V <sub>DD</sub> = 5V, V <sub>O</sub> = 0.5V or 4.5V V <sub>DD</sub> = 10V, V <sub>O</sub> = 1V or 9V V <sub>DD</sub> = 15V, V <sub>O</sub> = 1.5V or 13.5V	3.5 7.0 11.0		3.5 7.0 11.0	2.75 5.5 8.25		3.5 7.0 11.0		V
I <sub>OL</sub>	Low Level Output Current (Note 3)	V <sub>DD</sub> = 5V, V <sub>O</sub> = 0.4V V <sub>DD</sub> = 10V, V <sub>O</sub> = 0.5V V <sub>DD</sub> = 15V, V <sub>O</sub> = 1.5V	0.52 1.3 3.6		0.44 1.1 3.0	0.88 2.25 8.8		0.36 0.9 2.4		mA mA mA
I <sub>OH</sub>	High Level Output Current (Note 3)	V <sub>DD</sub> = 5V, V <sub>O</sub> = 4.6V V <sub>DD</sub> = 10V, V <sub>O</sub> = 9.5V V <sub>DD</sub> = 15V, V <sub>O</sub> = 13.5V	−0.52 −1.3 −3.6		−0.44 −1.1 −3.0	−0.88 −2.25 −8.8		−0.36 −0.9 −2.4		mA mA mA
I <sub>IN</sub>	Input Current	V <sub>DD</sub> = 15V, V <sub>IN</sub> = 0V V <sub>DD</sub> = 15V, V <sub>IN</sub> = 15V		−0.3 0.3	−10−5 10−5	−0.3 0.3		−1.0 1.0		μA μA

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** V<sub>SS</sub> = 0V unless otherwise specified.

**Note 3:** I<sub>OH</sub> and I<sub>OL</sub> are tested one output at a time.


## AC Electrical Characteristics\* CD4047B

T<sub>A</sub> = 25°C, C<sub>L</sub> = 50 pF, R<sub>L</sub> = 200k, input t<sub>r</sub> = t<sub>f</sub> = 20 ns, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Propagation Delay Time Astable, Astable to Osc Out	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		200 100 80	400 200 160	ns ns ns
t <sub>PHL</sub> , t <sub>PLH</sub>	Astable, Astable to Q, $\bar{Q}$	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		550 250 200	900 500 400	ns ns ns
t <sub>PHL</sub> , t <sub>PLH</sub>	+ Trigger, − Trigger to $\bar{Q}$	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		700 300 240	1200 600 480	ns ns ns
t <sub>PHL</sub> , t <sub>PLH</sub>	+ Trigger, Retrigger to $\bar{Q}$	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		300 175 150	600 300 250	ns ns ns
t <sub>PHL</sub> , t <sub>PLH</sub>	Reset to Q, $\bar{Q}$	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		300 125 100	600 250 200	ns ns ns
t <sub>THL</sub> , t <sub>TLH</sub>	Transition Time Q, $\bar{Q}$ , Osc Out	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		100 50 40	200 100 80	ns ns ns
t <sub>WL</sub> , t <sub>WH</sub>	Minimum Input Pulse Duration	Any Input V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V		500 200 160	1000 400 320	ns ns ns
t <sub>RCL</sub> , t <sub>FCL</sub>	+ Trigger, Retrigger, Rise and Fall Time	V <sub>DD</sub> = 5V V <sub>DD</sub> = 10V V <sub>DD</sub> = 15V			15 5 5	μs μs μs
C <sub>IN</sub>	Average Input Capacitance	Any Input		5	7.5	pF

\*AC Parameters are guaranteed by DC correlated testing.

## Logic Diagram

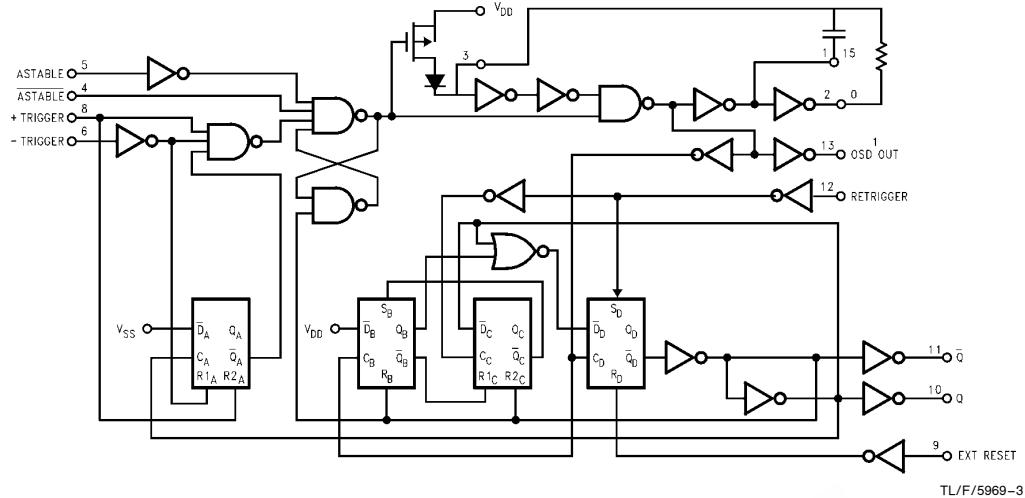


\*Special input protection circuit to permit larger input-voltage swings.

## Truth Table

Function	Terminal Connections			Output Pulse From	Typical Output Period or Pulse Width
	To V <sub>DD</sub>	To V <sub>SS</sub>	Input Pulse To		
Astable Multivibrator					
Free-Running	4, 5, 6, 14	7, 8, 9, 12		10, 11, 13	$t_A (10, 11) = 4.40 \text{ RC}$
True Gating	4, 6, 14	7, 8, 9, 12	5	10, 11, 13	$t_A (13) = 2.20 \text{ RC}$
Complement Gating	6, 14	5, 7, 8, 9, 12	4	10, 11, 13	
Monostable Multivibrator					
Positive-Edge Trigger	4, 14	5, 6, 7, 9, 12	8	10, 11	
Negative-Edge Trigger	4, 8, 14	5, 7, 9, 12	6	10, 11	$t_M (10, 11) = 2.48 \text{ RC}$
Retriggerable	4, 14	5, 6, 7, 9	8, 12	10, 11	
External Countdown*	14	5, 6, 7, 8, 9, 12	(See Figure)	(See Figure)	(See Figure)


Note: External resistor between terminals 2 and 3. External capacitor between terminals 1 and 3.

### \*Typical Implementation of External Countdown Option

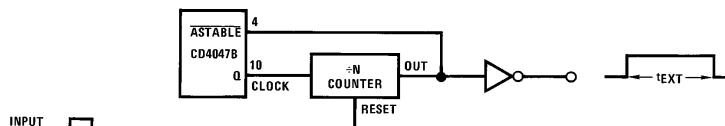


TL/F/5969-4

## Typical Performance Characteristics

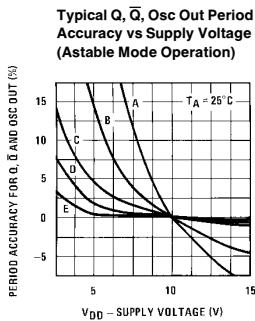


TL/F/5969-5

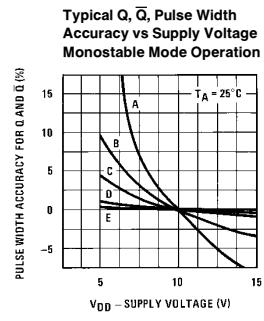


TL/F/5969-6

	$f_Q, \bar{Q}$	R	C		$t_M$	R	C
A	1000 kHz	22k	10 pF		2 $\mu$ s	22k	10 pF
B	100 kHz	22k	100 pF		7 $\mu$ s	22k	100 pF
C	10 kHz	220k	100 pF		60 $\mu$ s	220k	100 pF
D	1 kHz	220k	1000 pF		550 $\mu$ s	220k	1000 pF
E	100 Hz	2.2M	1000 pF		5.5 ms	2.2M	1000 pF

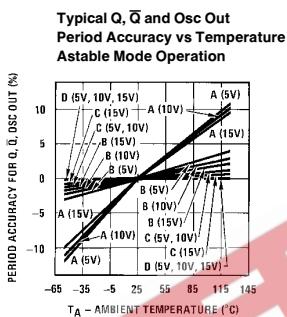


TL/F/5969-7

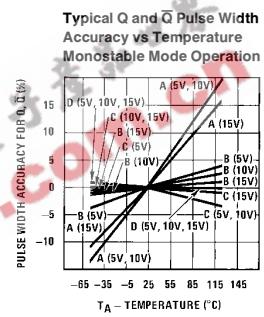


TL/F/5969-8

	$f_Q, \bar{Q}$	R	C		$t_M$	R	C
A	1000 kHz	22k	10 pF		2 $\mu$ s	22k	10 pF
B	100 kHz	22k	100 pF		7 $\mu$ s	22k	100 pF
C	10 kHz	220k	100 pF		60 $\mu$ s	220k	100 pF
D	1 kHz	220k	1000 pF		550 $\mu$ s	220k	1000 pF


## Timing Diagram

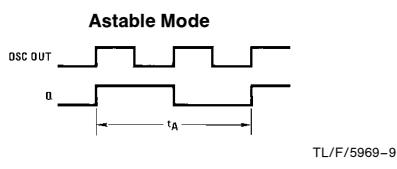

TL/F/5969-9

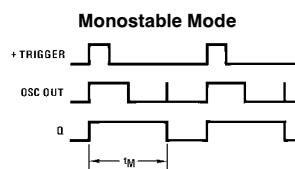



TL/F/5969-10

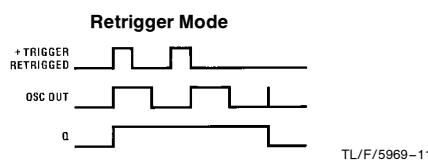

TL/F/5969-11

# CD4047BM/CD4047BC Low Power Monostable/Astable Multivibrator

## Physical Dimensions inches (millimeters)

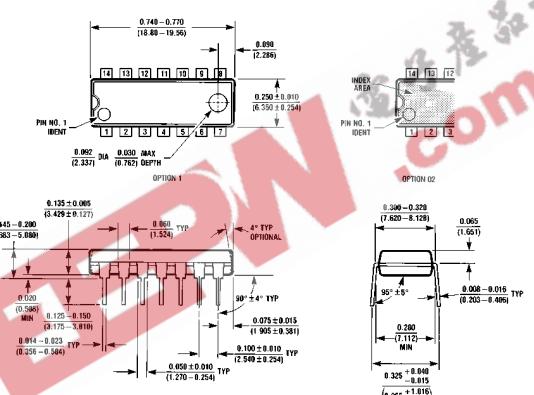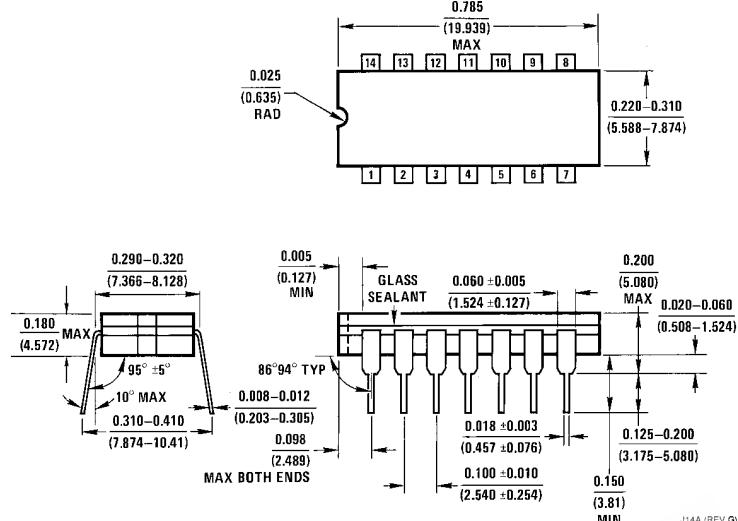

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: (800) 272-9959  
Fax: (800) 737-7018

**National Semiconductor Europe**  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@tevm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Francais Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408