



CS2841B

Automotive Current Mode PWM Control Circuit

Description

The CS2841B provides all the necessary features to implement off-line fixed frequency current-mode control with a minimum number of external components.

The CS2841B (a variation of the CS-2843A) is designed specifically for use in automotive operation. The low start threshold voltage of 8.0V (typ), and the ability to survive 40V automotive load dump transients are important for automotive subsystem designs. The CS-2841 series has a history of

quality and reliability in automotive applications.


The CS2841B incorporates a precision temperature-controlled oscillator with an internally trimmed discharge current to minimize variations in frequency. Duty-cycles greater than 50% are also possible. On board logic ensures that V_{REF} is stabilized before the output stage is enabled. Ion implant resistors provide tighter control of undervoltage lockout.

Absolute Maximum Ratings

Supply Voltage (Low Impedance Source)	40V
Output Current	$\pm 1A$
Output Energy (Capacitive Load)	$5\mu J$
Analog Inputs (V_{FB} , Sense)	-0.3V to 5.5V
Error Amp Output Sink Current.....	10mA
Lead Temperature Soldering	

Wave Solder (through hole styles only) 10 sec. max, 260°C peak
Reflow (SMD styles only) 60 sec. max above 183°C, 230°C peak

Block Diagram

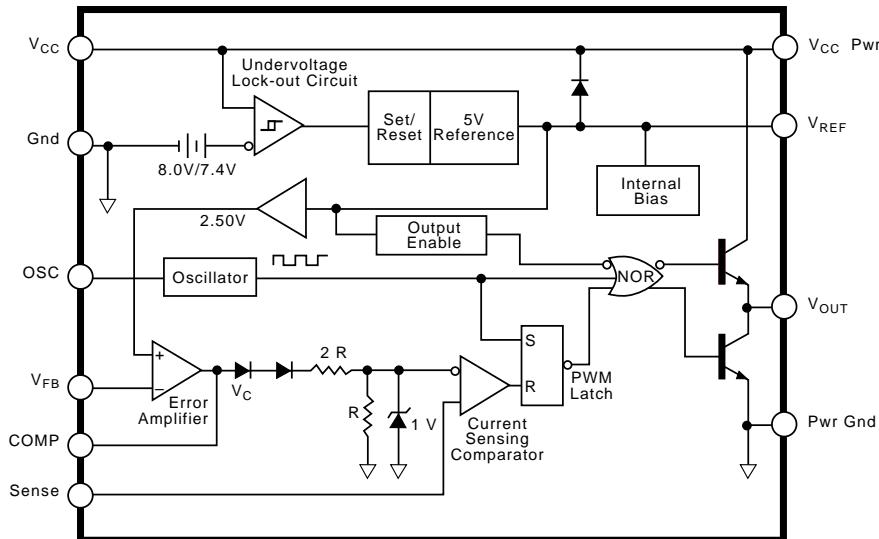


Features


- Optimized for Off-line Control
- Internally Trimmed Temperature Compensated Oscillator
- Maximum Duty-cycle Clamp
- V_{REF} Stabilized before Output Stage Enabled
- Low Start-up Current Pulse-by-pulse Current Limiting
- Improved Undervoltage Lockout
- Double Pulse Suppression
- 1% Trimmed Bandgap Reference
- High Current Totem Pole Output

Package Options

8 Lead PDIP

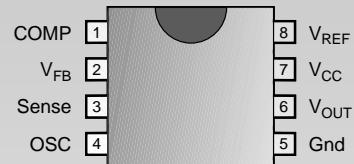

14 Lead SO Narrow



Cherry Semiconductor Corporation
2000 South County Trail, East Greenwich, RI 02818
Tel: (401)885-3600 Fax: (401)885-5786
Email: info@cherry-semi.com
Web Site: www.cherry-semi.com



**Cherry
Semiconductor**

Electrical Characteristics: d $-40 \leq T_A \leq 85^\circ\text{C}$ $R_T=680\text{k}\Omega$, $C_T=0.022\mu\text{F}$ for triangular mode, $V_{CC}=15\text{V}$ (Note 1),
 $R_T=10\text{k}\Omega$, $C_T=3.3\text{nF}$ for sawtooth mode (See Fig. 3), unless otherwise stated.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Reference Section					
Output Voltage	$T_J=25^\circ\text{C}$, $I_{OUT}=1\text{mA}$	4.90	5.00	5.10	V
Line Regulation	$8.4 \leq V_{CC} \leq 16\text{V}$		6	20	mV
Load Regulation	$1 \leq I_{OUT} \leq 20\text{mA}$		6	25	mV
Temperature Stability	(Note 2)		0.2	0.4	$\text{mV}/^\circ\text{C}$
Total Output Variation	Line, Load, Temp. (Note 2)	4.82		5.18	V
Output Noise Voltage	$10\text{Hz} \leq f \leq 10\text{kHz}$, $T_J=25^\circ\text{C}$ (Note 2)		50		μV
Long Term Stability	$T_A=125^\circ\text{C}$, 1000 Hrs. (Note 2)		5	25	mV
Output Short Circuit	$T_A=25^\circ\text{C}$	-30	-100	-180	mA
■ Oscillator Section					
Initial Accuracy	Sawtooth Mode: (See Fig. 3) $T_J=25^\circ\text{C}$	47	52	57	kHz
	Sawtooth Mode: $-40^\circ\text{C} \leq T_A \leq +85^\circ$	44	52	60	kHz
	Triangular Mode (See Fig. 3) $T_J=25^\circ\text{C}$	44	52	60	kHz
Voltage Stability	$8.4\text{V} \leq V_{CC} \leq 16\text{V}$		0.2	1.0	%
Temperature Stability	Sawtooth Mode $T_{MIN} \leq T_A \leq T_{MAX}$ Triangular Mode $T_{MIN} \leq T_A \leq T_{MAX}$ (Note 2)		5		%
Amplitude	V_{OSC} (peak to peak)		1.7		V
Discharge current	$T_J=25^\circ\text{C}$ $T_{MIN} \leq T_A \leq T_{MAX}$	7.4 7.2	8.3	9.2 9.4	mA
■ Error Amp Section					
Input Voltage	$V_{COMP}=2.5\text{V}$	2.42	2.50	2.58	V
Input Bias Current	$V_{FB}=0\text{V}$		-0.3	-2.0	μA
A_{VOL}	$2 \leq V_{OUT} \leq 4\text{V}$	65	90		dB
Unity Gain Bandwidth	(Note 2)	0.7	1.0		MHz
PSRR	$8.4\text{V} \leq V_{CC} \leq 16\text{V}$	60	70		dB
Output Sink Current	$V_{FB}=2.7\text{V}$, $V_{COMP}=1.1\text{V}$	2	6		mA
Output Source Current	$V_{FB}=2.3\text{V}$, $V_{COMP}=5\text{V}$	-0.5	-0.8		mA
V_{OUT} High	$V_{FB}=2.3\text{V}$, $R_L=15\text{k}\Omega$ to ground	5	6		V
V_{OUT} Low	$V_{FB}=2.7\text{V}$, $R_L=15\text{k}\Omega$ to V_{REF}		0.7	1.1	V
■ Current Sense Section					
Gain	(Notes 3 & 4)	2.85	3.00	3.15	V/V
Maximum Input Signal	$V_{COMP}=5\text{V}$ (Note 3)	0.9	1.0	1.1	V
PSRR	$12\text{V} \leq V_{CC} \leq 25\text{V}$ (Note 3)		70		dB
Input Bias Current	$V_{Sense}=0\text{V}$		-2	-10	μA
Delay to Output	$T_J=25^\circ\text{C}$ (Note 2)		150	300	ns

Notes: 1. Adjust V_{cc} above the start threshold before setting at 15V.

2. These parameters, although guaranteed, are not 100% tested in production.

3. Parameter measured at trip point of latch with $V_{FB}=0$.

4. Gain defined as:

$$A = \frac{\Delta V_{COMP}}{\Delta V_{Sense}} ; 0 \leq V_{Sense} \leq 0.8\text{V}.$$



Electrical Characteristics: continued

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Output Section					
Output Low Level	$I_{SINK}=20\text{mA}$ $I_{SINK}=200\text{mA}$	0.1 1.5	0.4 2.2	V V	
Output High Level	$I_{SOURCE}=20\text{mA}$ $I_{SOURCE}=200\text{mA}$	13.0 12.0	13.5 13.5	V V	
Rise Time	$T_J=25^\circ\text{C}$, $C_L=1\text{nF}$ (Note 2)	50	150	ns	
Fall Time	$T_J=25^\circ\text{C}$, $C_L=1\text{nF}$ (Note 2)	50	150	ns	
Output Leakage	Undervoltage Active, $V_{OUT}=0$	-0.01	-10.00	μA	
■ Total Standby Current					
Start-Up Current		0.5	1.0	mA	
Operating Supply Current I_{CC}	$V_{FB}=V_{Sense}=0\text{V}$, $R_T=10\text{k}\Omega$, $C_T=3.3\text{nF}$	11	17	mA	
■ Under-Voltage Lockout Section					
Start Threshold		7.6	8.0	8.4	V
Min. Operating Voltage	After Turn On	7.0	7.4	7.8	V


Package Pin Description

PACKAGE PIN #	PIN SYMBOL	FUNCTION
8L PDIP	14L SO Narrow	
1	1	COMP
2	3	V_{FB}
3	5	Sense
4	7	OSC
5	8	Gnd
	9	Pwr Gnd
6	10	V_{OUT}
	11	V_{CCPwr}
7	12	V_{CC}
8	14	V_{REF}
2,4,6,13	NC	No Connection

Typical Performance Characteristics:

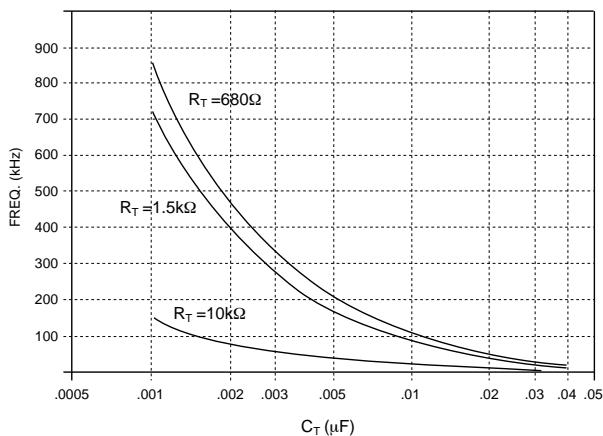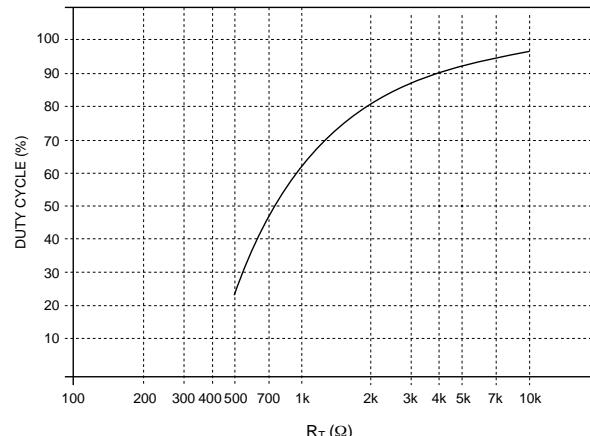Oscillator Frequency vs C_T Oscillator Duty Cycle vs R_T 

Test Circuit

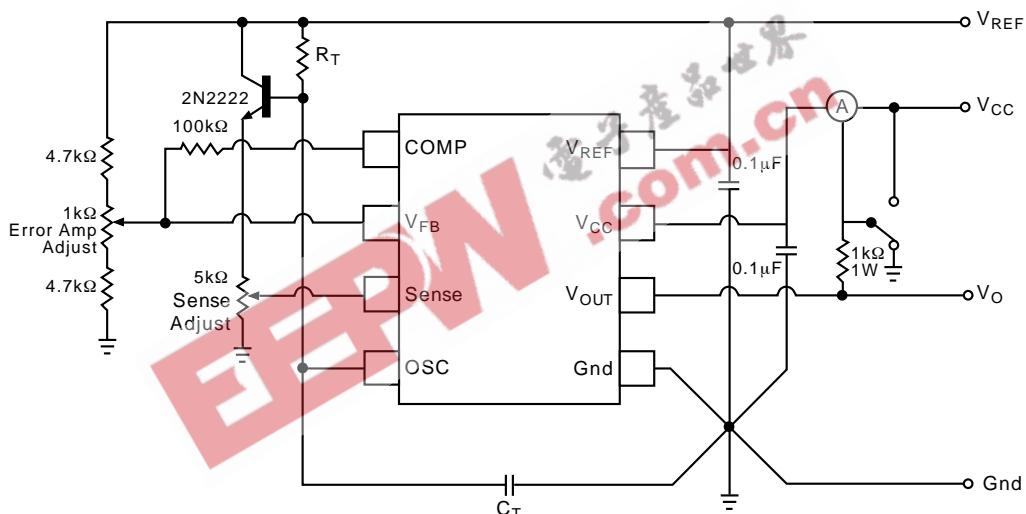

Circuit Description

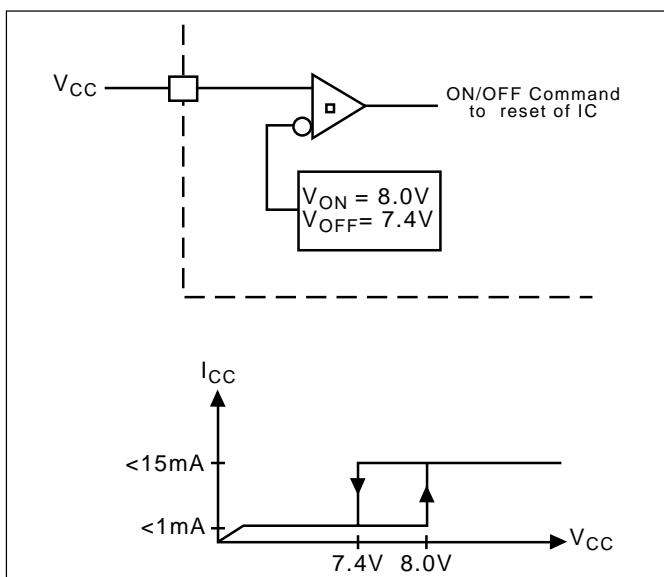


Figure 1: Typical Undervoltage Characteristics

Undervoltage Lockout

During Undervoltage Lockout (Figure 1), the output driver is biased to a high impedance state. The output should be shunted to ground with a resistor to prevent output leakage current from activating the power switch.

PWM Waveform

To generate the PWM waveform, the control voltage from the error amplifier is compared to a current sense signal which represents the peak output inductor current (Figure 2). An increase in V_{CC} causes the inductor current slope to increase, thus reducing the duty cycle. This is an inherent feed-forward characteristic of current mode control, since the control voltage does not have to change during changes of input supply voltage.

When the power supply sees a sudden large output current increase, the control voltage will increase allowing the duty cycle to momentarily increase. Since the duty cycle tends to exceed the maximum allowed to prevent trans-

Circuit Description: continued

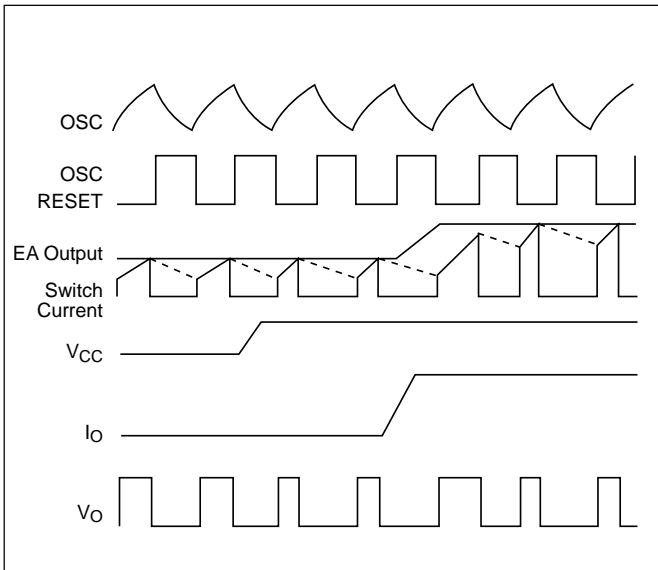


Figure 2: Timing Diagram for key CS2841B parameters

former saturation in some power supplies, the internal oscillator waveform provides the maximum duty cycle clamp as programmed by the selection of OSC components.

Setting the Oscillator

Oscillator timing capacitor, C_T , is charged by V_{REF} through R_T and discharged by an internal current source. During the discharge time, the internal clock signal blanks out the output to the Low state, thus providing a user selected maximum duty cycle clamp. Charge and discharge times are determined by the general formulas:

$$t_c = R_T C_T \ln \left(\frac{V_{REF} - V_{lower}}{V_{REF} - V_{upper}} \right)$$

$$t_d = R_T C_T \ln \left(\frac{V_{REF} - I_d R_T - V_{lower}}{V_{REF} - I_d R_T - V_{upper}} \right)$$

Substituting in typical values for the parameters in the above formulas:

$$V_{REF} = 5.0V, V_{upper} = 2.7V, V_{lower} = 1.0V, I_d = 8.3mA$$

$$t_c \approx 0.5534 R_T C_T$$

$$t_d = R_T C_T \ln \left(\frac{2.3 - 0.0083 R_T}{4.0 - 0.0083 R_T} \right)$$

The frequency and maximum duty cycle can be determined from the Typical Performance Characteristic graphs.

Grounding

High peak currents associated with capacitive loads necessitate careful grounding techniques. Timing and bypass capacitors should be connected close to Gnd pin in a single point ground.

The transistor and 5kΩ potentiometer are used to sample the oscillator waveform and apply an adjustable ramp to Sense.


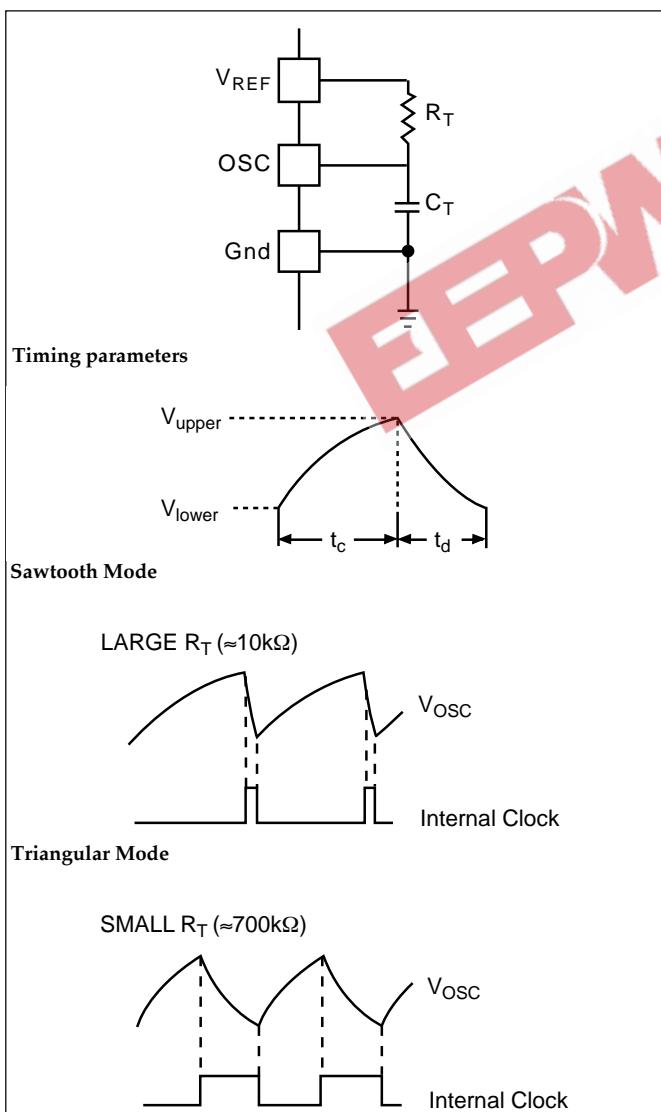


Figure 3: Oscillator Timing Network and parameters


Package Specification

PACKAGE DIMENSIONS IN mm (INCHES)				PACKAGE THERMAL DATA				
Lead Count	D		Metric	English	Thermal Data		8 L PDIP	14 L SO Narrow
	Max	Min			Max	Min		
8 Lead PDIP	10.16	9.02	.400	.355	R _{θJA}	typ	100	125
14 Lead SO Narrow	8.75	8.55	.344	.337				

Surface Mount Narrow Body (D); 150 mil wide

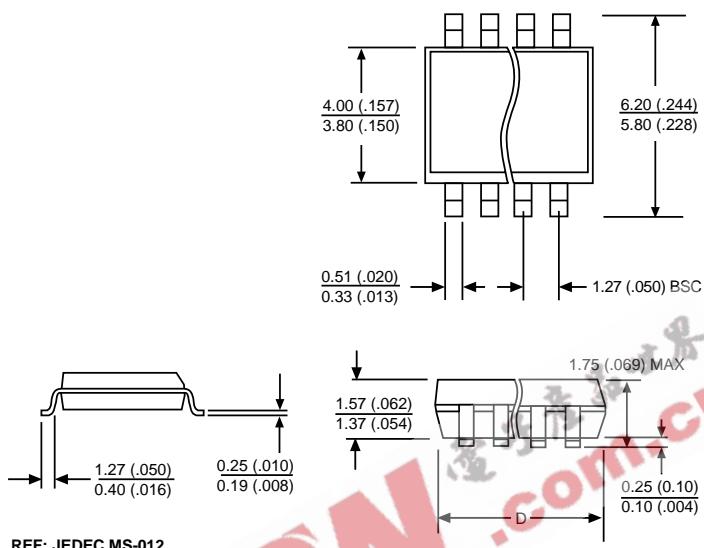

Plastic DIP (N); 300 mil wide

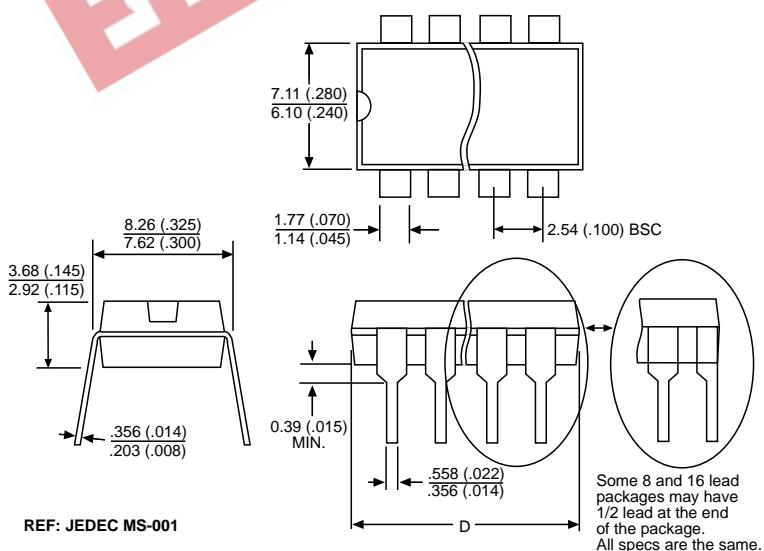

Ordering Information

Part Number	Description
CS2841BEN8	8L PDIP
CS2841BED14	14L SO Narrow
CS2841BEDR14	14L SO Narrow (tape & reel)

Cherry Semiconductor Corporation reserves the right to make changes to the specifications without notice. Please contact Cherry Semiconductor Corporation for the latest available information.