

DDTC (R1≠R2 SERIES) UA


NPN PRE-BIASED SMALL SIGNAL SOT-323 SURFACE MOUNT TRANSISTOR

Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTA)
- Built-In Biasing Resistors, R1≠R2
- **Lead Free/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2 & 3)**


Mechanical Data

- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 3. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking: Date Code and Type Code, See Page 3
- Type Code: See Table Below
- Ordering Information (See Page 3)
- Weight: 0.006 grams (approximate)

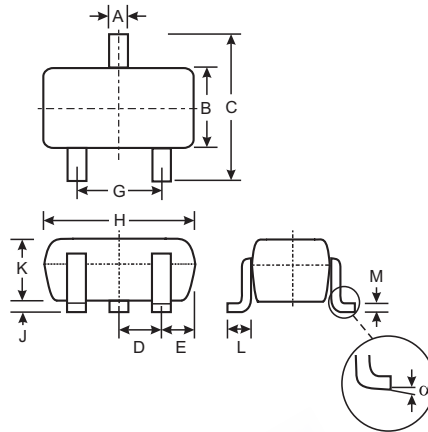


SOT-323		
Dim	Min	Max
A	0.25	0.40
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
E	0.30	0.40
G	1.20	1.40
H	1.80	2.20
J	0.0	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.18
α	0°	8°
All Dimensions in mm		

P/N	R1 (NOM)	R2 (NOM)	Type Code
DDTC113ZUA	1KΩ	10KΩ	N02
DDTC123YUA	2.2KΩ	10KΩ	N05
DDTC123JUA	2.2KΩ	47KΩ	N06
DDTC143XUA	4.7KΩ	10KΩ	N09
DDTC143FUA	4.7KΩ	22KΩ	N10
DDTC143ZUA	4.7KΩ	47KΩ	N11
DDTC114YUA	10KΩ	47KΩ	N14
DDTC114WUA	10KΩ	4.7KΩ	N15
DDTC124XUA	22KΩ	47KΩ	N18
DDTC144VUA	47KΩ	10KΩ	N21
DDTC144WUA	47KΩ	22KΩ	N22

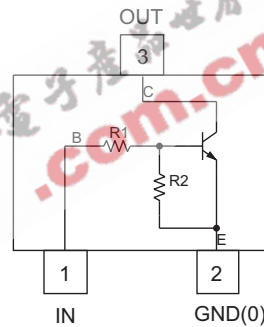

Schematic and Pin Configuration

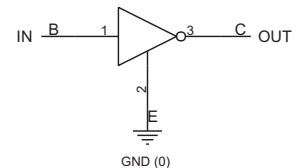

Equivalent Inverter Circuit

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit	
Supply Voltage, (3) to (2)	V _{CC}	50	V	
Input Voltage, (1) to (2)	V _{IN}	DDTC113ZUA DDTC123YUA DDTC123JUA DDTC143XUA DDTC143FUA DDTC143ZUA DDTC114YUA DDTC114WUA DDTC124XUA DDTC144VUA DDTC144WUA	-5 to +10 -5 to +12 -5 to +12 -7 to +20 -6 to +30 -5 to +30 -6 to +40 -10 to +30 -10 to +40 -15 to +40 -10 to +40	V
Output Current	I _O	DDTC113ZUA DDTC123YUA DDTC123JUA DDTC143XUA DDTC143FUA DDTC143ZUA DDTC114YUA DDTC114WUA DDTC124XUA DDTC144VUA DDTC144WUA	100 100 100 100 100 100 70 100 50 30 30	mA
Output Current	I _C (Max)	All	100	mA

Note: 1. No purposefully added lead.

2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.

3. Product manufactured with Date Code 0609 (week 9, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0609 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Maximum Ratings (continued) @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Output Current	I _C (Max)	100	mA
Power Dissipation	P _d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 4)	R _{θJA}	625	°C/W
Operating and Storage and Temperature Range	T _J , T _{STG}	-55 to +150	°C

 Notes: 4. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	V _{I(off)}	0.3	—	—	—	V _{CC} = 5V, I _O = 100μA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 20mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 5mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 20mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 3mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 5mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 1mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 2mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 2mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 2mA
		0.3	—	—		
Input Voltage	V _{I(on)}	0.5	—	—	—	V _O = 0.3V, I _O = 2mA
		0.3	—	—		
Output Voltage	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 5mA/0.25mA DDCT123JUA
		—	0.1	0.3		I _O /I _I = 5mA/0.25mA DDCT143ZUA
Output Voltage	V _{O(on)}	—	0.1	0.3	V	I _O /I _I = 5mA/0.25mA DDCT114YUA
		—	0.1	0.3		I _O /I _I = 10mA/0.5mA All Others
Input Current	I _I	—	—	7.2	mA	V _I = 5V
		—	—	3.8		
Input Current	I _I	—	—	3.6	mA	V _I = 5V
		—	—	1.8		
Input Current	I _I	—	—	1.8	mA	V _I = 5V
		—	—	1.8		
Input Current	I _I	—	—	0.88	mA	V _I = 5V
		—	—	0.88		
Input Current	I _I	—	—	0.36	mA	V _I = 5V
		—	—	0.16		
Input Current	I _I	—	—	0.16	mA	V _I = 5V
		—	—	0.16		
Output Current	I _{O(off)}	—	—	0.5	μA	V _{CC} = 50V, V _I = 0V
DC Current Gain	G _I	33	—	—	—	V _O = 5V, I _O = 5mA
		33	—	—		V _O = 5V, I _O = 10mA
DC Current Gain	G _I	80	—	—	—	V _O = 5V, I _O = 10mA
		30	—	—		V _O = 5V, I _O = 10mA
DC Current Gain	G _I	68	—	—	—	V _O = 5V, I _O = 10mA
		68	—	—		V _O = 5V, I _O = 10mA
DC Current Gain	G _I	24	—	—	—	V _O = 5V, I _O = 5mA
		68	—	—		V _O = 5V, I _O = 10mA
DC Current Gain	G _I	68	—	—	—	V _O = 5V, I _O = 5mA
		33	—	—		V _O = 5V, I _O = 5mA
DC Current Gain	G _I	56	—	—	—	V _O = 5V, I _O = 5mA
		56	—	—		V _O = 5V, I _O = 5mA
Input Resistor Tolerance	ΔR ₁	-30	—	+30	%	—
Resistance Ratio Tolerance	ΔR ₂ /R ₁	-20	—	+20	%	—
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = 10V, I _E = 5mA, f = 100MHz


* Transistor - For Reference Only

Ordering Information (Note 4 & 5)

Device	Packaging	Shipping
DDTC113ZUA-7-F	SOT-323	3000/Tape & Reel
DDTC123YUA-7-F	SOT-323	3000/Tape & Reel
DDTC123JUA-7-F	SOT-323	3000/Tape & Reel
DDTC143XUA-7-F	SOT-323	3000/Tape & Reel
DDTC143FUA-7-F	SOT-323	3000/Tape & Reel
DDTC143ZUA-7-F	SOT-323	3000/Tape & Reel
DDTC114YUA-7-F	SOT-323	3000/Tape & Reel
DDTC114WUA-7-F	SOT-323	3000/Tape & Reel
DDTC124XUA-7-F	SOT-323	3000/Tape & Reel
DDTC144VUA-7-F	SOT-323	3000/Tape & Reel
DDTC144WUA-7-F	SOT-323	3000/Tape & Reel

- Notes: 4. Product manufactured with Date Code 0609 (week 9, 2006) and newer are built with Green Molding Compound. Product manufactured prior Date Code 0609 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.
 5. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



NXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	N	P	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDTC123JUA

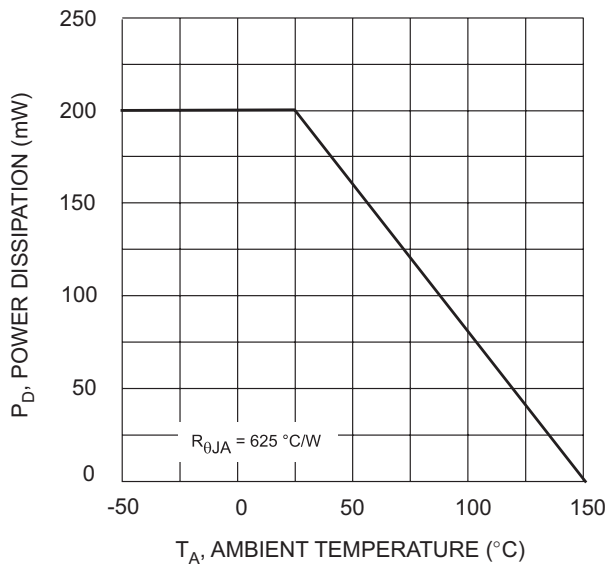


Fig. 1 Derating Curve

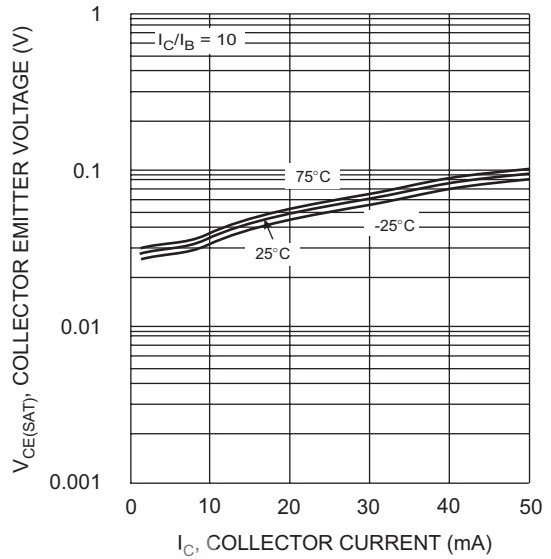


Fig. 2 $V_{CE(SAT)}$ vs. I_C

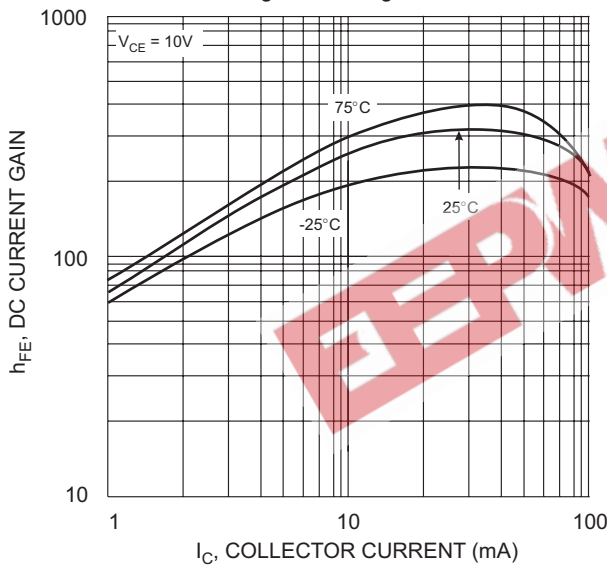


Fig. 3 DC Current Gain

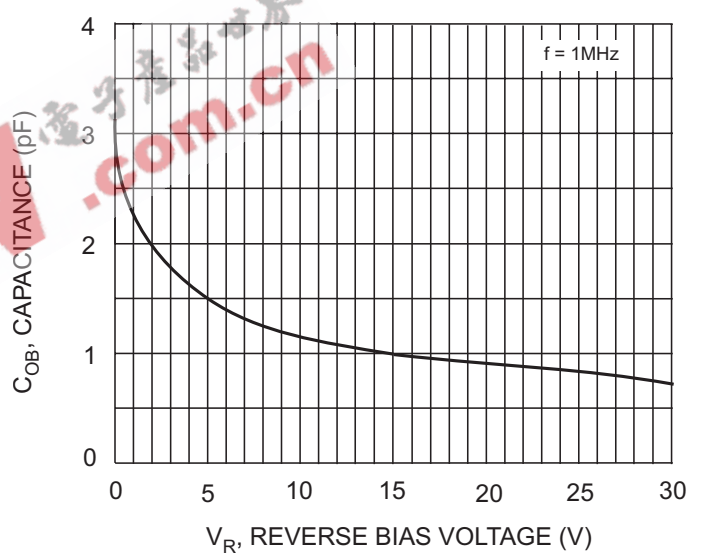


Fig. 4 Output Capacitance

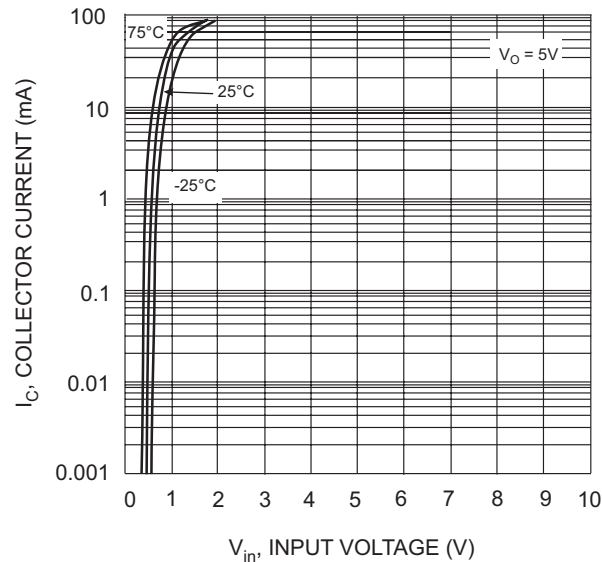


Fig. 5 Collector Current Vs. Input Voltage

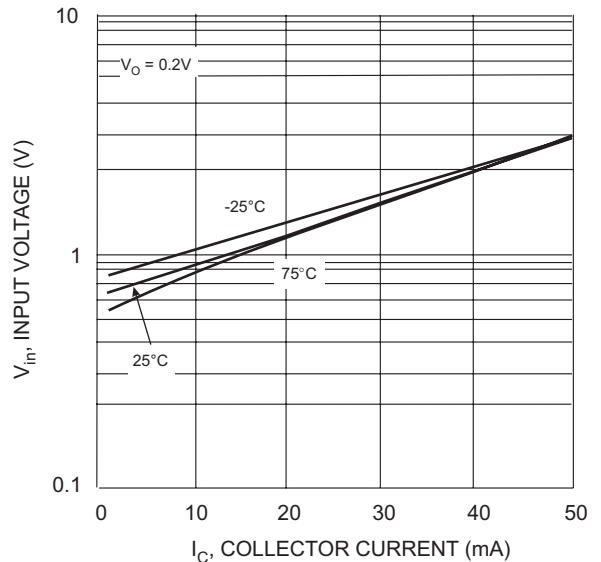


Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

EEPW 电子產品世界
.com.cn