

# D200RP Series



## Short Circuit Protected Regulated, 2W SIP DC/DC Converters

### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

### Key Features:

- 2W Output Power
- Short Circuit Protection
- Tight Line/Load Regulation
- 1,000 VDC Isolation
- Miniature SIP Case
- >1.5 MHour MTBF
- 15 Standard Models

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Input Filter	π (Pi) Filter				
Reverse Polarity Input Current				0.3	A

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy				±2.0	%
Line Regulation	For Vin Min to Max			±0.5	%
Load Regulation (Note 1)				±0.5	%
Ripple & Noise (20 MHz) (Note 2)				75	mV P - P
Output Power Protection		120			%
Temperature Coefficient				±0.02	%/°C
Output Short Circuit	Continuous				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			40		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-25	+25	+71	°C
Operating Temperature Range	Case	-25		+85	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size	1.26 x 0.32 x 0.55 Inches (32.0 x 8.0 x 14.0 mm)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.17 Oz (4.8g)				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.5			MHours

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C
Internal Power Dissipation	All Models			450	mW

**Caution:** Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

### MicroPower Direct

232 Tosca Drive  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerelectronics.com  
W: www.micropowerelectronics.com




## Model Selection Guide

Model Number	Input				Output			Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
	Nominal	Range	Full-Load	No-Load					
D201RP	5	4.5 - 5.5	606	80	5.0	400.0	40.0	66	1,000
D202RP	5	4.5 - 5.5	606	80	9.0	222.0	22.0	66	1,000
D203RP	5	4.5 - 5.5	571	80	12.0	167.0	17.0	70	1,000
D204RP	5	4.5 - 5.5	571	80	15.0	133.0	13.0	70	1,000
D205RP	5	4.5 - 5.5	588	80	24.0	83.0	10.0	68	1,000
D211RP	12	10.8 - 13.2	253	45	5.0	400.0	40.0	66	500
D212RP	12	10.8 - 13.2	253	45	9.0	222.0	22.0	66	500
D213RP	12	10.8 - 13.2	238	45	12.0	167.0	17.0	70	500
D214RP	12	10.8 - 13.2	238	45	15.0	133.0	13.0	70	500
D215RP	12	10.8 - 13.2	246	45	24.0	83.0	10.0	68	500
D221RP	24	21.6 - 26.4	130	25	5.0	400.0	40.0	64	200
D222RP	24	21.6 - 26.4	130	25	9.0	222.0	22.0	64	200
D223RP	24	21.6 - 26.4	122	25	12.0	167.0	17.0	68	200
D224RP	24	21.6 - 26.4	122	25	15.0	133.0	13.0	68	200
D225RP	24	21.6 - 26.4	118	25	24.0	83.0	10.0	70	200

### Notes:

- Output load regulation is specified for a load change of 20% to 100%.
- When measuring output ripple, it is recommended that an external 0.33  $\mu$ F ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- These do not require external components to operate, but the use of a low ESR capacitor (approximately 10  $\mu$ F, ESR <1.0 $\Omega$  at 100 kHz) mounted close to the converter input pins is recommended.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

### Derating Curve

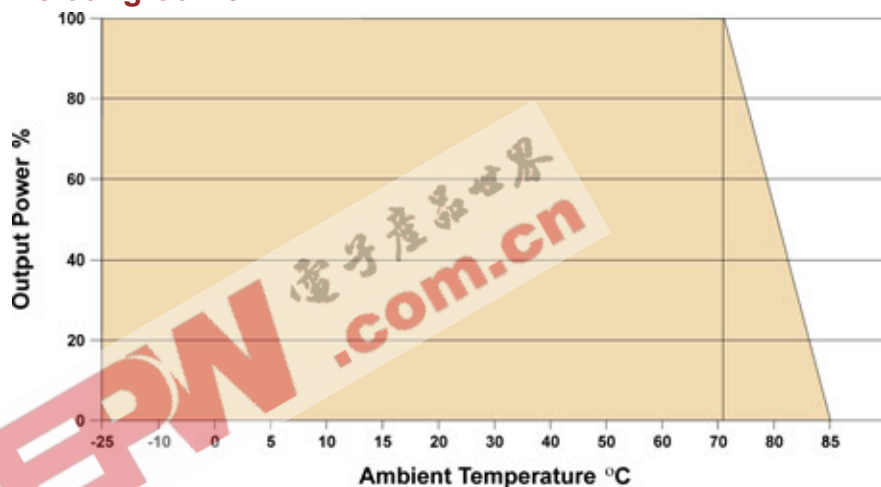

### Capacitive Load


$\mu$ F Max
470

### Pin Connections

Pin	Function
1	+Vin
2	NC
3	NC
9	NC
10	-Vout
11	+Vout
12	-Vin

NC: No Connection

### Mechanical Dimensions

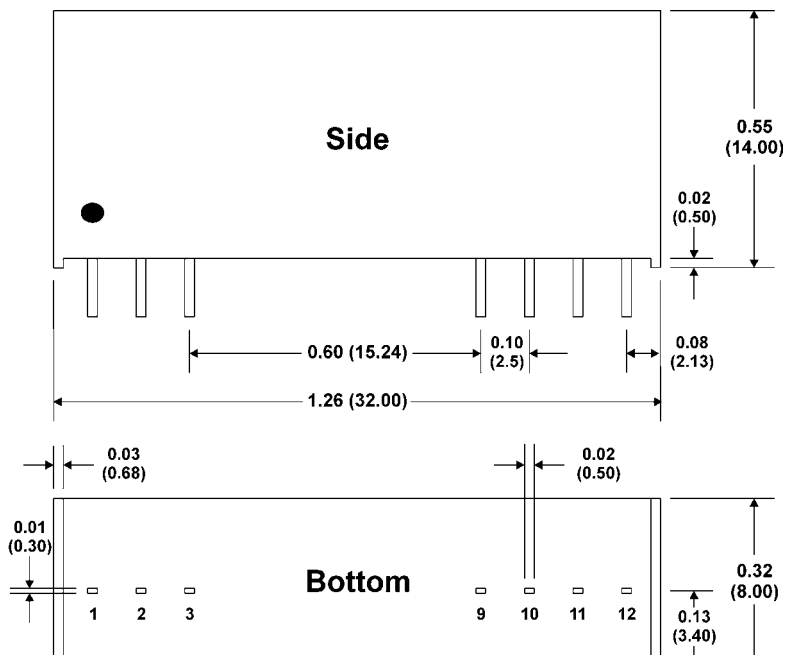

### Notes:

All dimensions are typical in inches (mm)

Tolerance x.xx =  $\pm 0.01$  ( $\pm 0.25$ )

Pin 1 is marked by a "dot" or indentation on the side of the unit



**MicroPower Direct**  
www.micropowerdirect.com