


MECHANICAL DATA

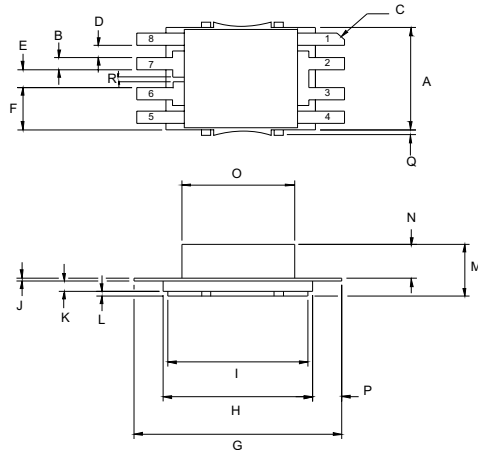

**GOLD METALLISED
MULTI-PURPOSE SILICON
DMOS RF FET
10W – 7.2V – 1GHz
SINGLE ENDED**

DBC3 Package

- PIN 1 Source PIN 5 Source
- PIN 2 Drain PIN 6 Gate
- PIN 3 Drain PIN 7 Gate
- PIN 4 Source PIN 8 Source

DIM	mm	Tol.	Inches	Tol.
A	6.47	0.08	.255	.003
B	0.76	0.08	.030	.003
C	45°	5°	45°	5°
D	0.76	0.08	.030	.003
E	1.14	0.08	.045	.003
F	2.67	0.08	.105	.003
G	11.73	0.13	.462	.005
H	8.43	0.08	.332	.003
I	7.92	0.08	.312	.003
J	0.20	0.02	.008	.001
K	0.64	0.02	.025	.001
L	0.30	0.02	.012	.001
M	3.25	0.08	.128	.003
N	2.11	0.08	.083	.003
O	6.35SQ	0.08	.250SQ	.003
P	1.65	0.51	.065	.020
Q	0.13	max	.005	max
R	0.25	0.07	0.010	.003

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN
- SUITABLE FOR BROAD BAND APPLICATIONS
- LOW C_{rss}
- LOW NOISE
- HIGH GAIN

APPLICATIONS

- HF/VHF/UHF COMMUNICATIONS
from 1 MHz to 2 GHz

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

P_D	Power Dissipation	70W
BV_{DSS}	Drain – Source Breakdown Voltage	40V
BV_{GSS}	Gate – Source Breakdown Voltage	$\pm 20V$
$I_{D(sat)}$	Drain Current	16A
T_{stg}	Storage Temperature	-65 to 150°C
T_j	Maximum Operating Junction Temperature	200°C

ELECTRICAL CHARACTERISTICS ($T_{\text{case}} = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DSS} Drain–Source Breakdown Voltage	$V_{\text{GS}} = 0$ $I_{\text{D}} = 10\text{mA}$	40			V
I_{DSS} Zero Gate Voltage Drain Current	$V_{\text{DS}} = 12.5\text{V}$ $V_{\text{GS}} = 0$			8	mA
I_{GSS} Gate Leakage Current	$V_{\text{GS}} = 20\text{V}$ $V_{\text{DS}} = 0$			8	μA
$V_{\text{GS(th)}}$ Gate Threshold Voltage*	$I_{\text{D}} = 10\text{mA}$ $V_{\text{DS}} = V_{\text{GS}}$	1		7	V
g_{fs} Forward Transconductance*	$V_{\text{DS}} = 10\text{V}$ $I_{\text{D}} = 0.8\text{A}$	1.44			S
G_{PS} Common Source Power Gain	$P_{\text{O}} = 10\text{W}$	7			dB
η Drain Efficiency	$V_{\text{DS}} = 7.2\text{V}$ $I_{\text{DQ}} = 0.8\text{A}$	40			%
VSWR Load Mismatch Tolerance	$f = 1\text{GHz}$	20:1			—
C_{iss} Input Capacitance	$V_{\text{DS}} = 0$ $V_{\text{GS}} = -5\text{V}$ $f = 1\text{MHz}$			96	pF
C_{oss} Output Capacitance	$V_{\text{DS}} = 12.5\text{V}$ $V_{\text{GS}} = 0$ $f = 1\text{MHz}$			80	pF
C_{rss} Reverse Transfer Capacitance	$V_{\text{DS}} = 12.5\text{V}$ $V_{\text{GS}} = 0$ $f = 1\text{MHz}$			8	pF

* Pulse Test: Pulse Duration = 300 μs , Duty Cycle $\leq 2\%$

THERMAL DATA

$R_{\text{THj-case}}$	Thermal Resistance Junction – Case	Max. 2.5°C / W
-----------------------	------------------------------------	----------------