

D15SCA4M

40V 15A


FEATURES

- Tj150°C
- PRRSM avalanche guaranteed
- Fully Isolated Molding

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

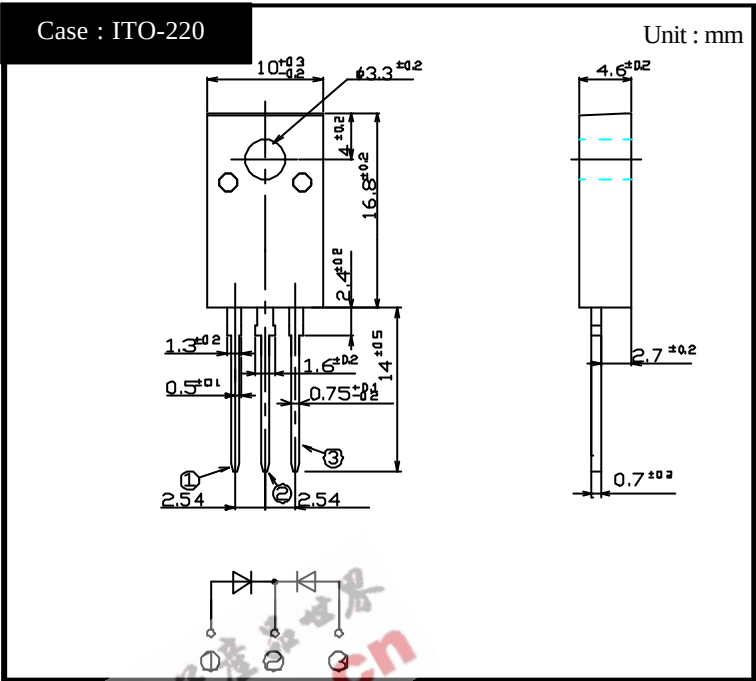

RATINGS


●Absolute Maximum Ratings (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		40	V
Repetitive Peak Surge Reverse Voltage	VRRSM	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	Io	50Hz sine wave, R-load, Rating for each diode Io/2, Tc=117°C	15	A
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Ti=125°C	150	A
Repetitive Peak Surge Reverse Power	PRRSM	Pulse width 10 μs, Rating of per diode, Tj= 25°C	330	W
Dielectric Strength	Vdis	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque :0.3N·m)	0.5	N·m


●Electrical Characteristics (If not specified Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=7.5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	IR	VR=VRM, Pulse measurement, Rating of per diode	Max. 5	mA
Junction Capacitance	Cj	f=1MHz, VR=10V, Rating of per diode	Tvp.340	pF
Thermal Resistance	θjc	junction to case	Max.2.8	°C/W
	θcf	case to heatsink, Mounting torque=0.5N·m	Max.1.5	


D15SCA4M Forward Voltage

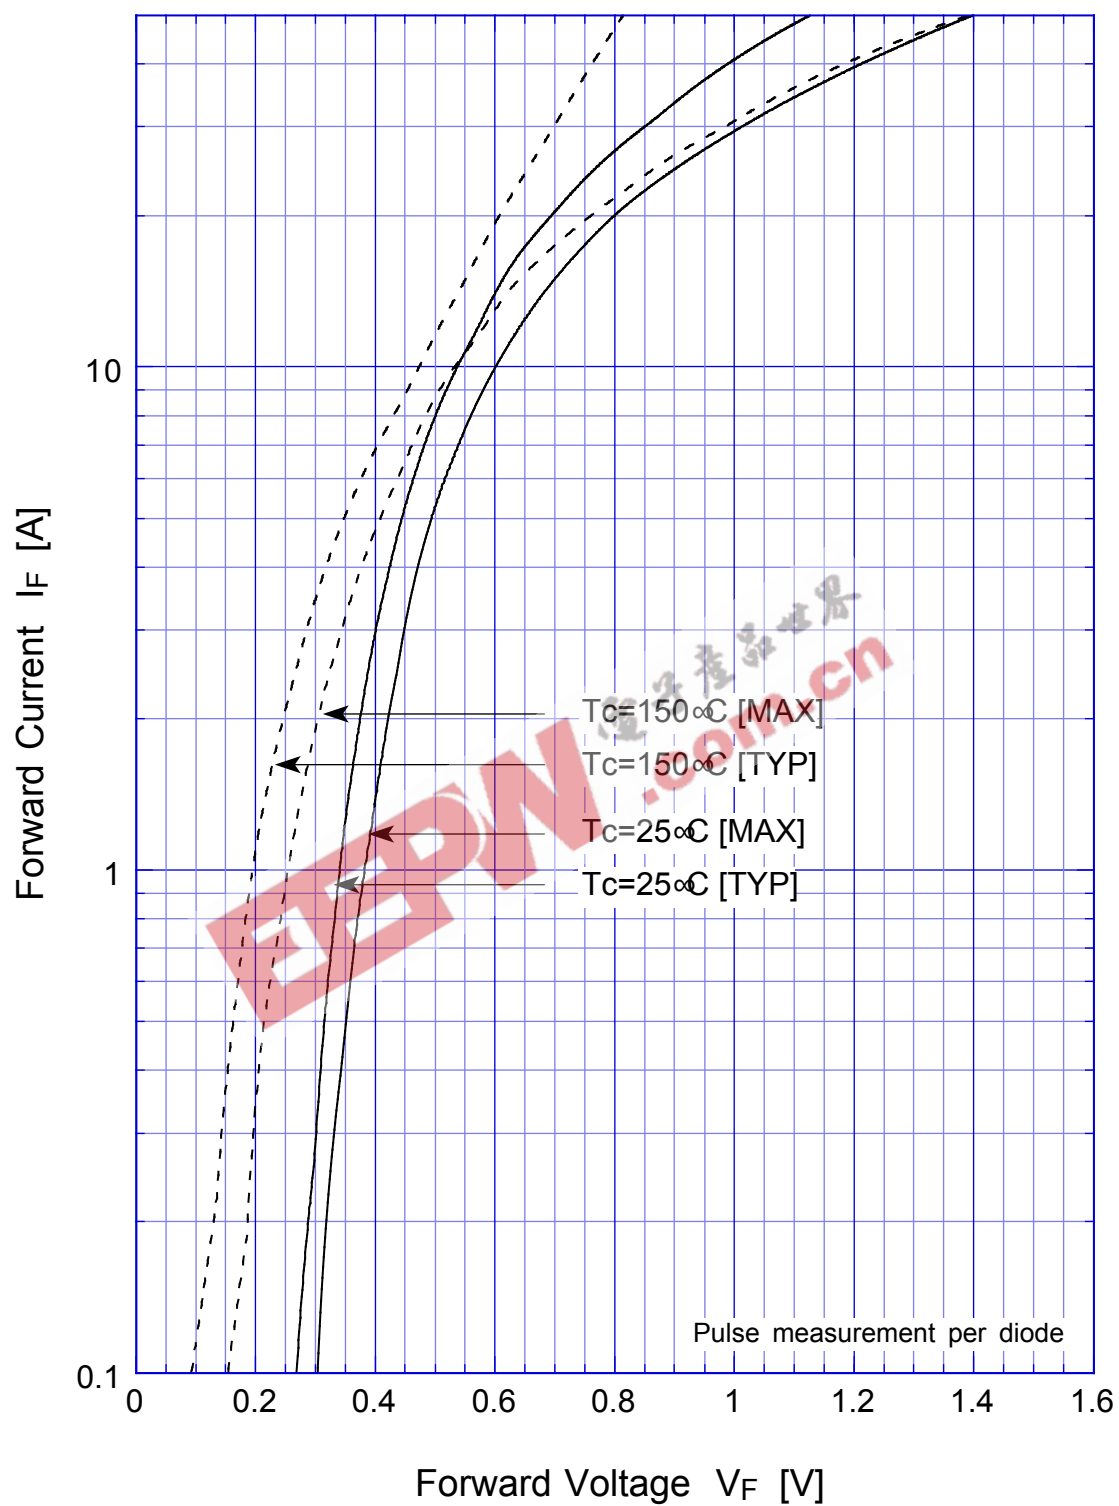


D15SCA4M Junction Capacitance

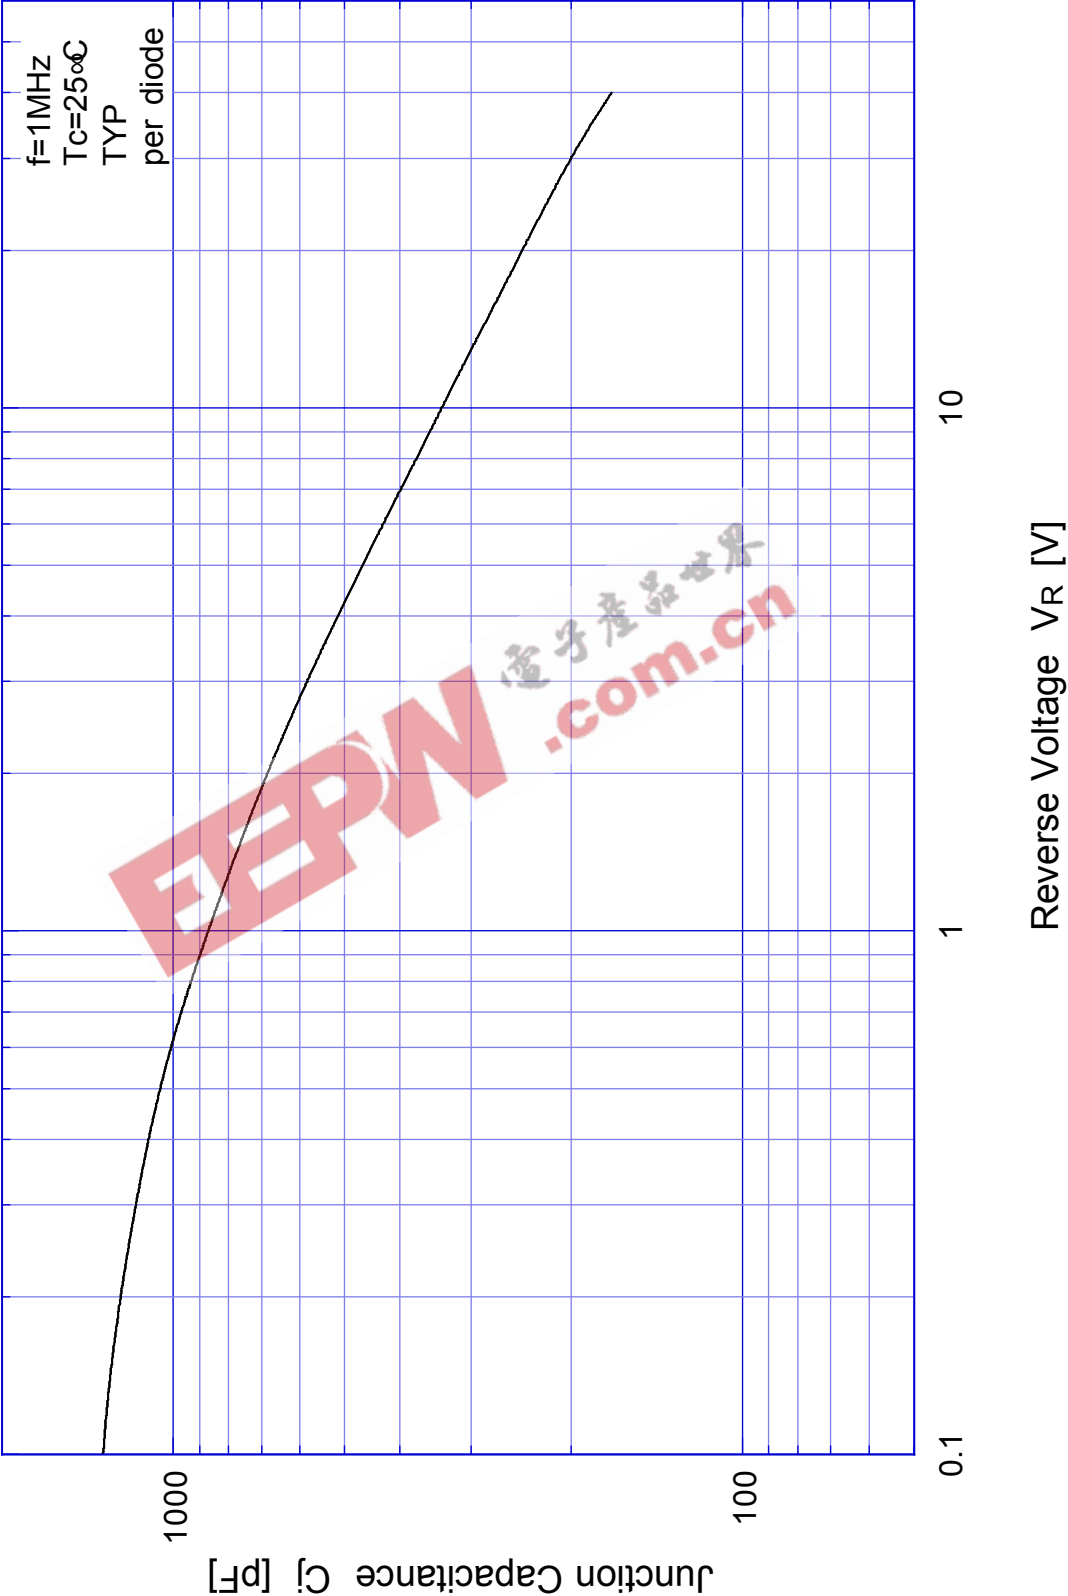


D15SCA4M Reverse Current

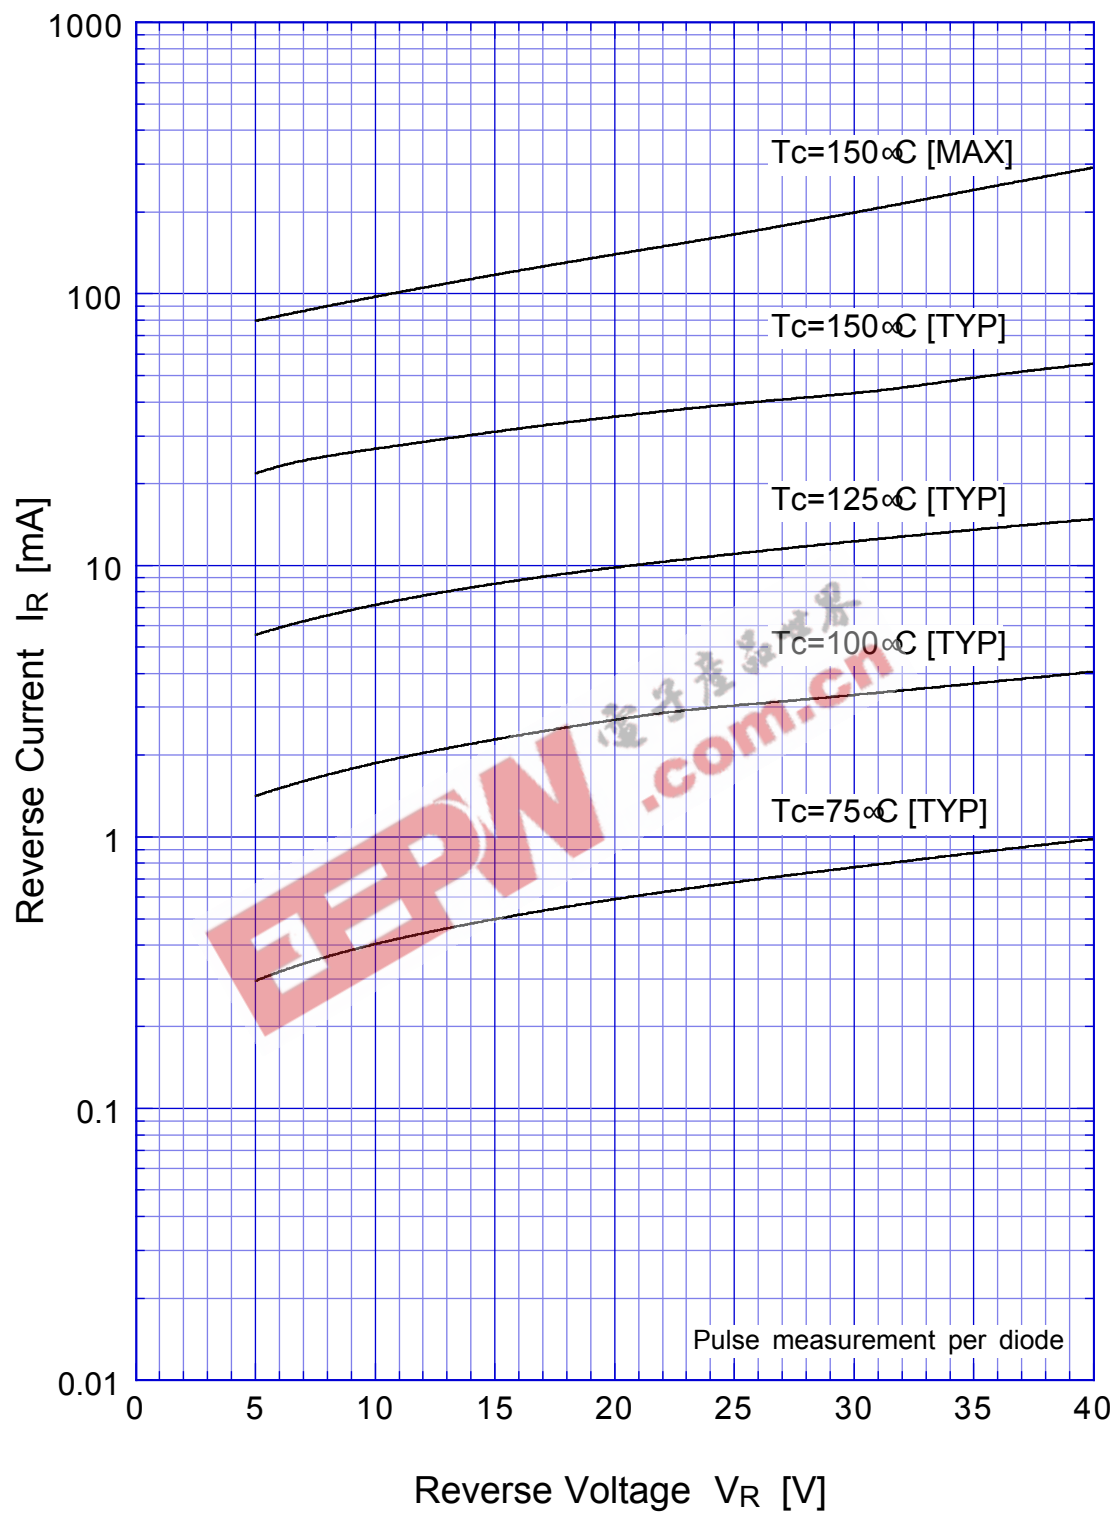


D15SCA4M Reverse Power Dissipation

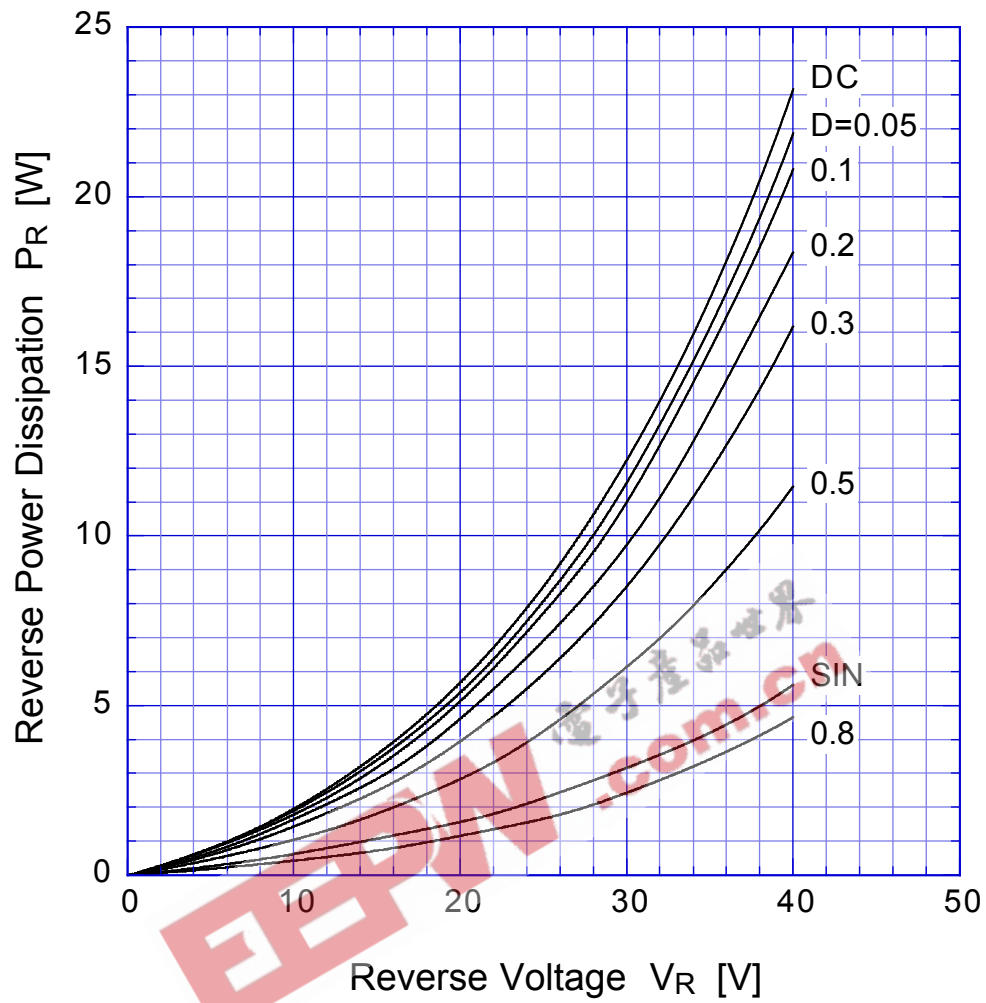


$T_j = 150^\circ\text{C}$

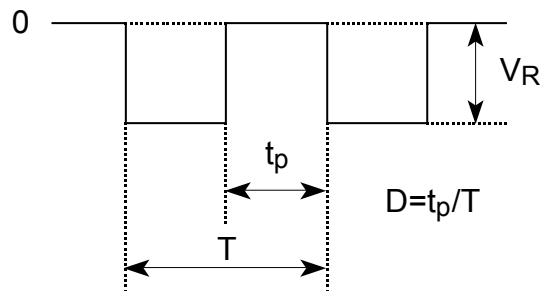

D15SCA4M Forward Power Dissipation

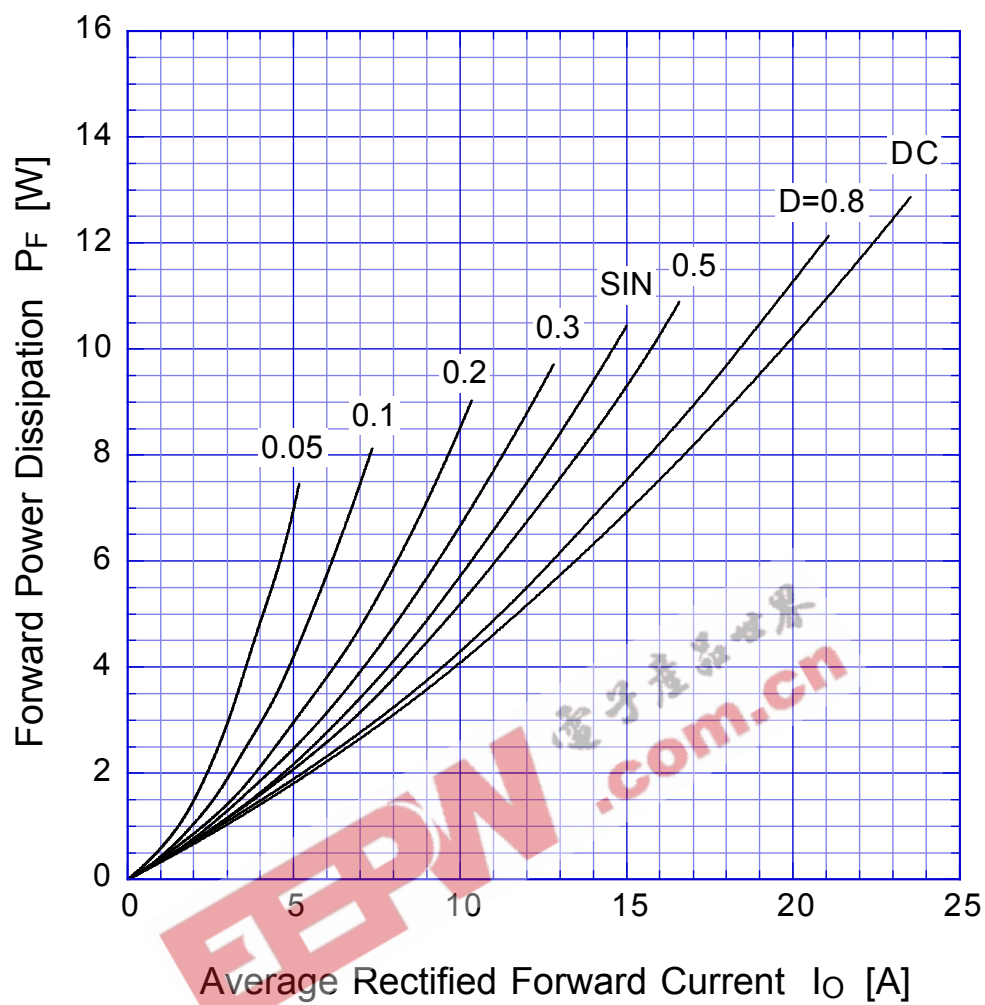


$T_j = 150^\circ\text{C}$

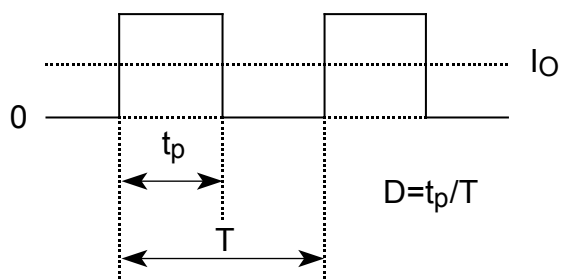


D15SCA4M

Derating Curve

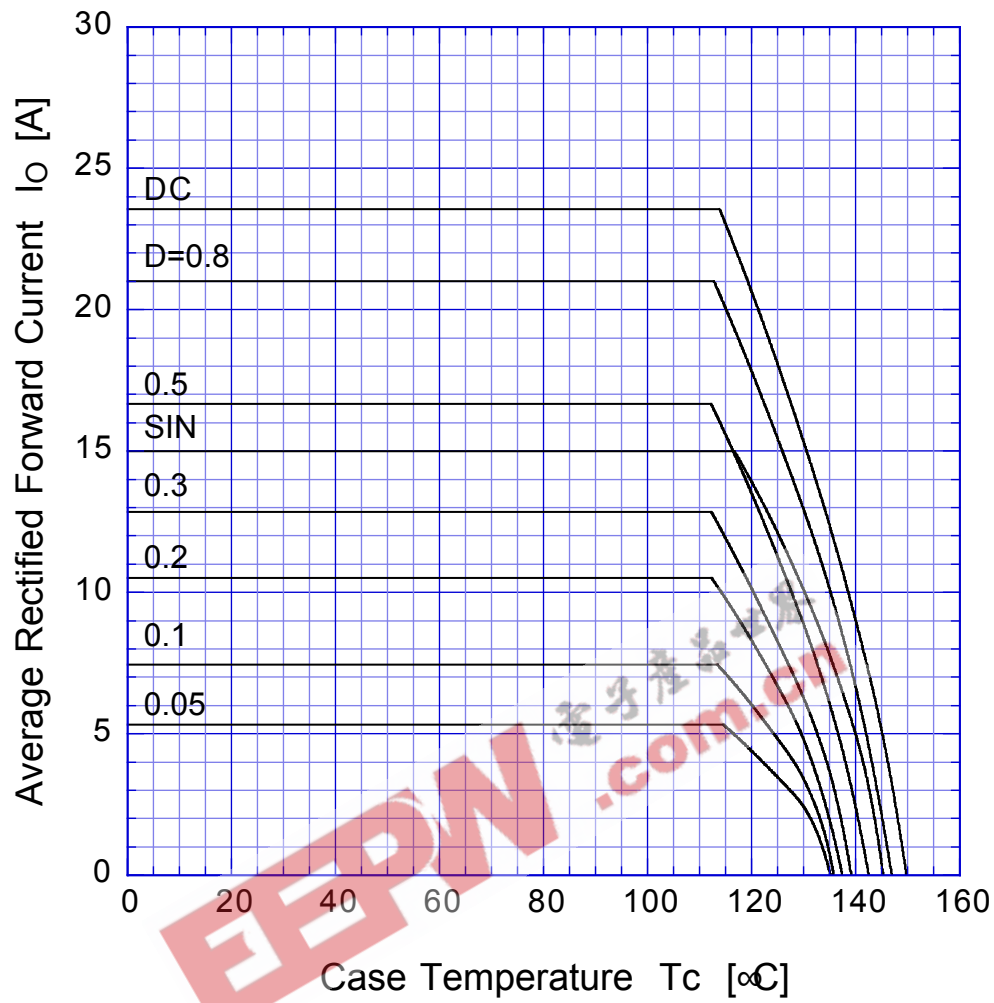


$V_R = 20\text{V}$

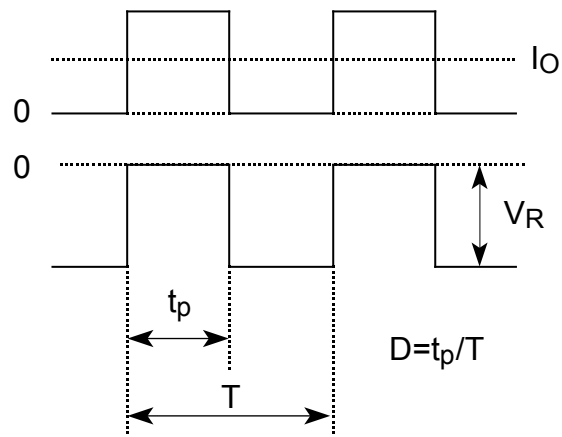


D15SCA4M


Derating Curve

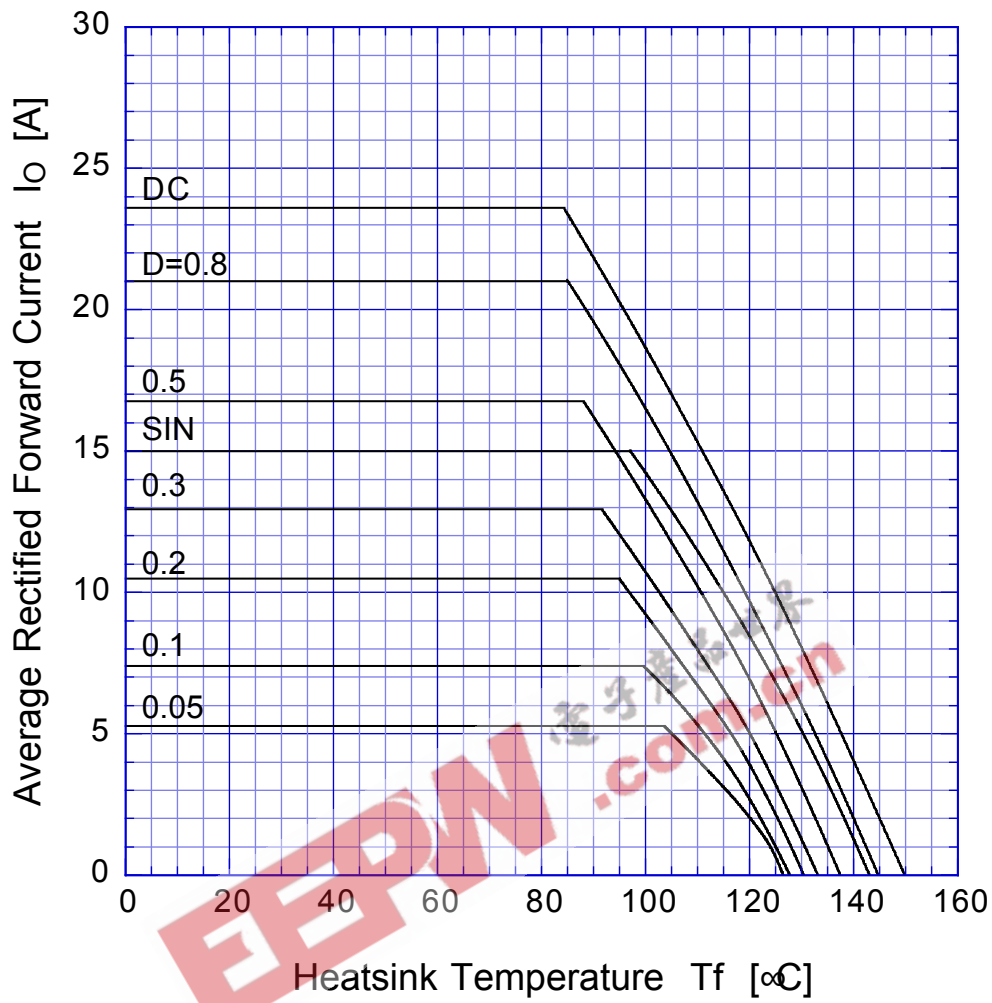



$V_R = 20V$

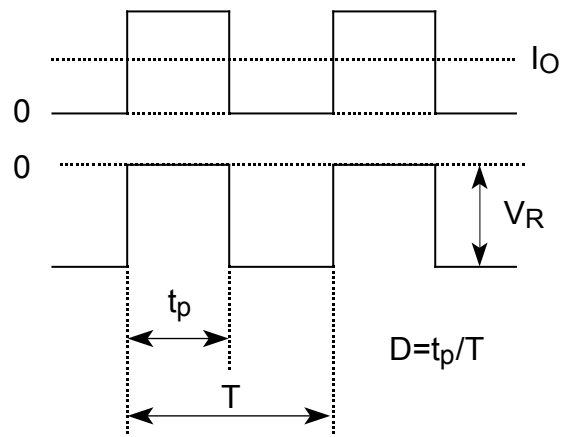

D15SCA4M Peak Surge Forward Capability

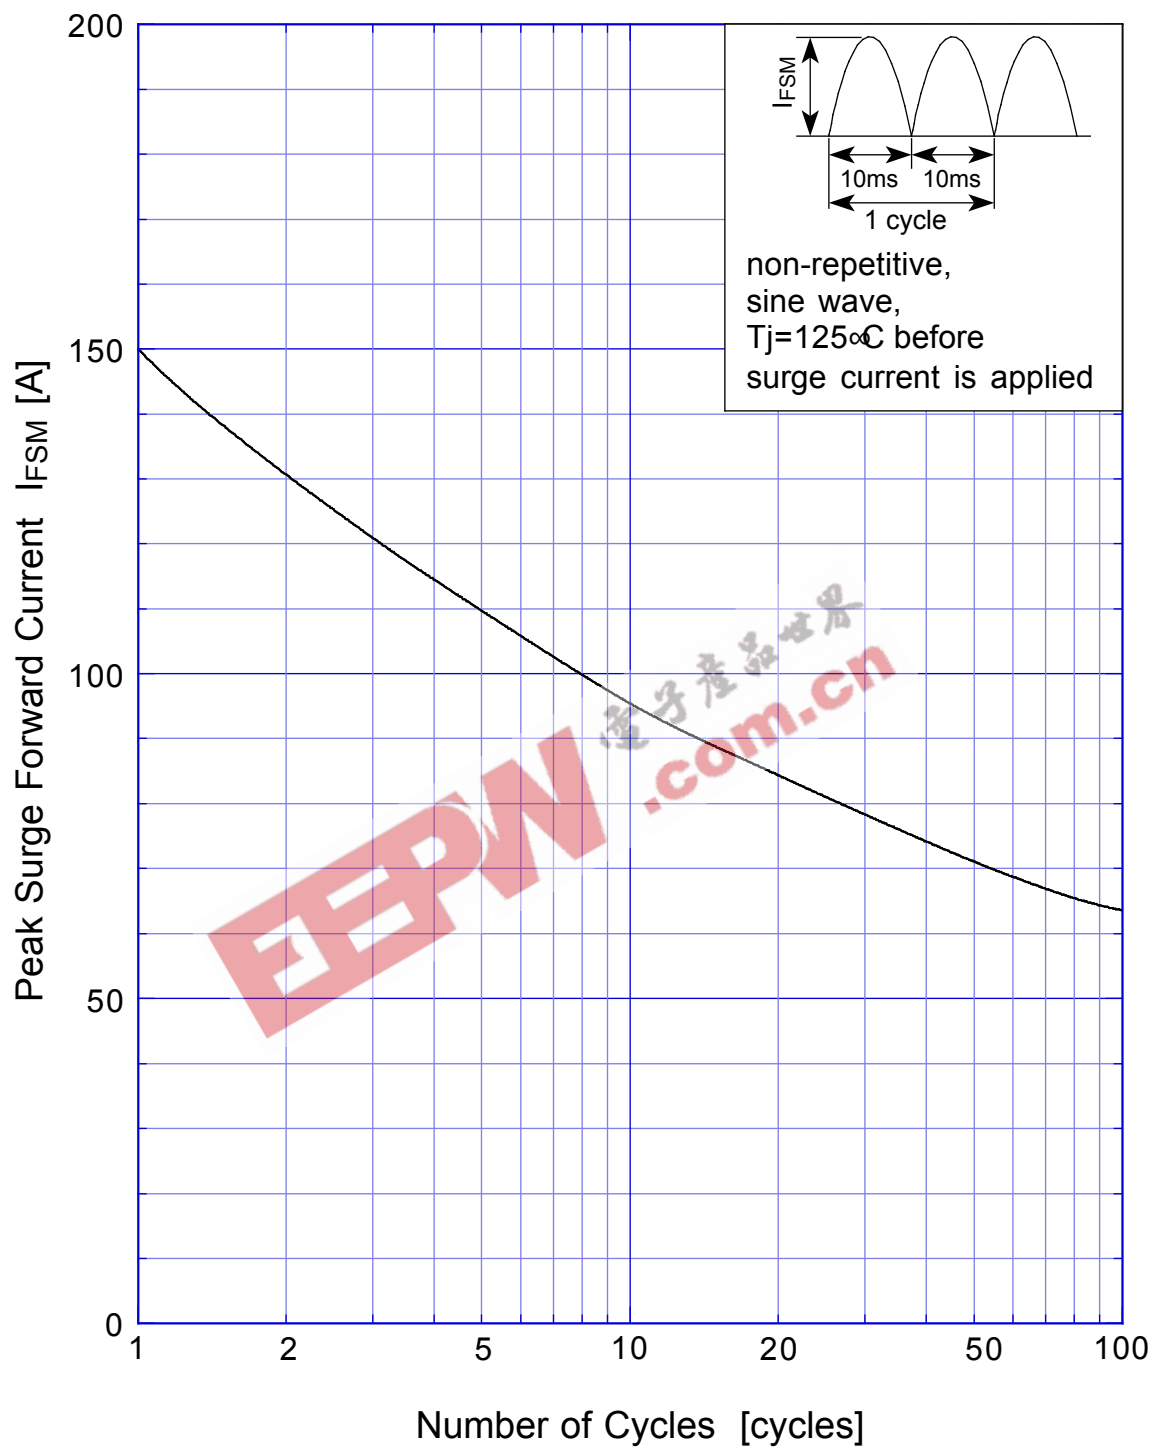

SBD Repetitive Surge Reverse Power Derating Curve

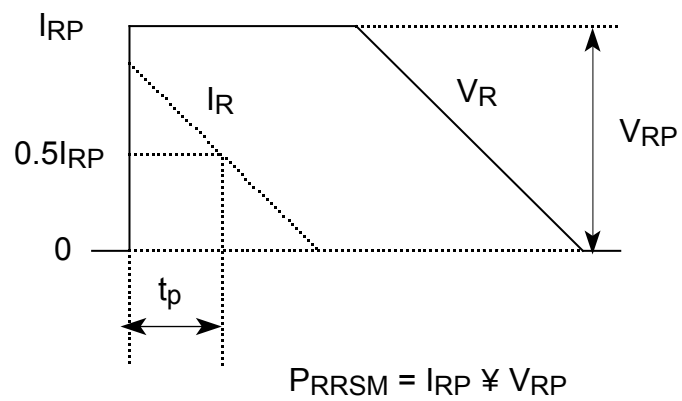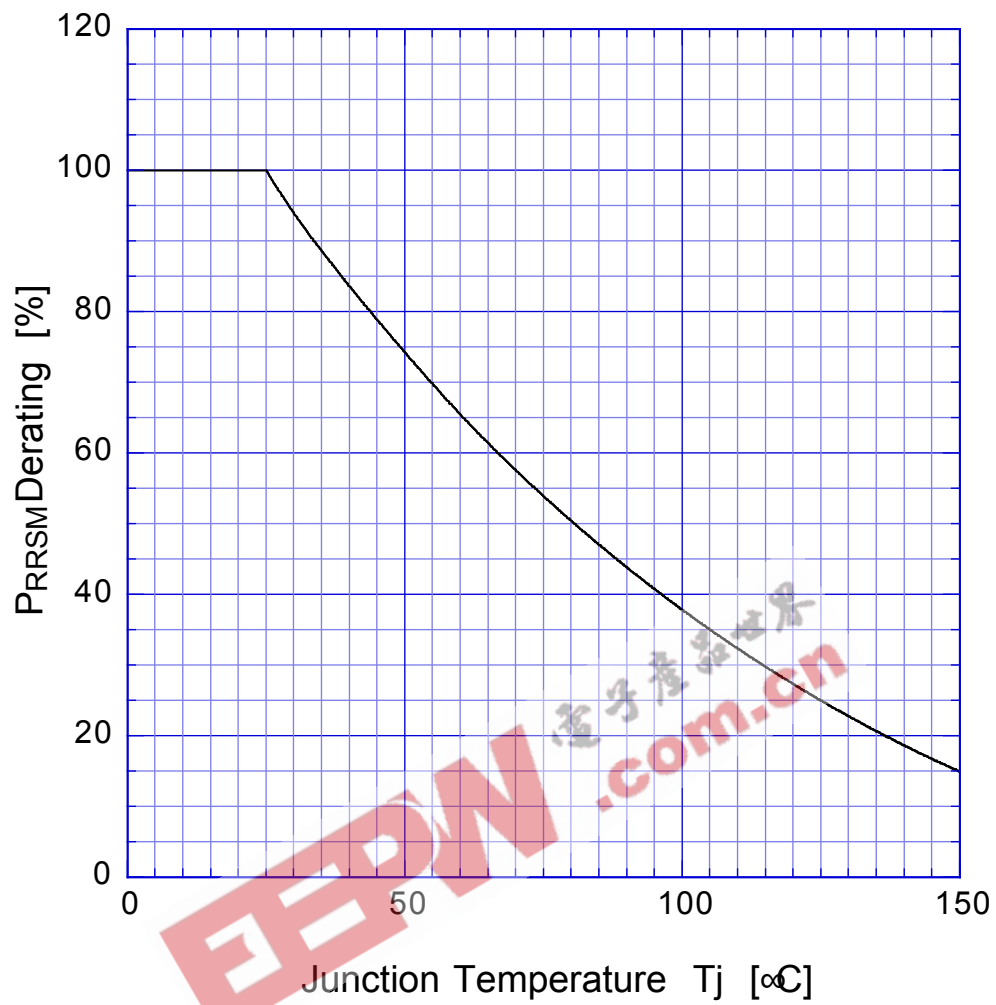

SBD

Repetitive Surge Reverse Power Capability

