
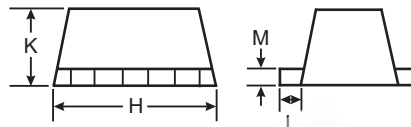


Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDA)
- Built-In Biasing Resistors
- **Lead Free By Design/RoHS Compliant (Note 3)**

Mechanical Data


- Case: SOT-563
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)




SEE NOTE 1

| SOT-563 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.25 |
| B | 1.10 | 1.25 | 1.20 |
| C | 1.55 | 1.70 | 1.60 |
| D | 0.50 | | |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| K | 0.56 | 0.60 | 0.60 |
| L | 0.15 | 0.25 | 0.20 |
| M | 0.10 | 0.18 | 0.11 |
| All Dimensions in mm | | | |

| P/N | R1 | R2 | MARKING |
|----------|-------|-------|---------|
| DDC124EH | 22KΩ | 22KΩ | N17 |
| DDC144EH | 47KΩ | 47KΩ | N20 |
| DDC143EH | 4.7KΩ | 4.7KΩ | N08 |
| DDC114YH | 10KΩ | 47KΩ | N14 |
| DDC123JH | 2.2KΩ | 47KΩ | N06 |
| DDC114EH | 10KΩ | 10KΩ | N13 |
| DDC143TH | 4.7KΩ | - | N07 |
| DDC114TH | 10KΩ | - | N12 |



R₁, R₂



R₁ Only

SCHEMATIC DIAGRAM, TOP VIEW

Maximum Ratings @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|--|------|
| Supply Voltage (6) to (1) and (3) to (4) | V _{CC} | 50 | V |
| Input Voltage (2) to (1) and (5) to (4) | V _{IN} | -10 to +40 -10 to +40 -10 to +30 -6 to +40 -5 to +12 -10 to +40 -5 V _{max} -5 V _{max} | V |
| Output Current | I _O | 30 30 100 70 100 50 100 100 | mA |
| Output Current | I _C (Max) | 100 | mA |
| Power Dissipation | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 2) | R _{θJA} | 833 | °C/W |
| Operating and Storage and Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

- Note:
1. Package is non-polarized. Parts may be on reel in orientation illustrated, 180° rotated, or mixed (both ways).
 2. Mounted on FR4 Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. No purposefully added lead.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

| Characteristic (DDC143TH & DDC114TH only) | Symbol | Min | Typ | Max | Unit | Test Condition |
|---|----------------------|-----|-----|-----|------|---|
| Collector-Base Breakdown Voltage | BV _{CB0} | 50 | — | — | V | I _C = 50μA |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | 50 | — | — | V | I _C = 1mA |
| Emitter-Base Breakdown Voltage | BV _{EBO} | 5 | — | — | V | I _E = 50μA |
| Collector Cutoff Current | I _{CB0} | — | — | 0.5 | μA | V _{CB} = 50V |
| Emitter Cutoff Current | I _{EBO} | — | — | 0.5 | μA | V _{EB} = 4V |
| Collector-Emitter Saturation Voltage | V _{CE(sat)} | — | — | 0.3 | V | I _C /I _B = 2.5mA / 0.25mA I _C /I _B = 1mA / 0.1mA DDC143TH DDC114TH |
| DC Current Transfer Ratio | h _{FE} | 100 | 250 | 600 | — | I _C = 1mA, V _{CE} = 5V |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = 10V, I _E = -5mA, f = 100MHz |

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|---------------------|----------------------------------|-----|--|------|--|
| Input Voltage | V _{I(off)} | 0.5 | 1.1 | — | V | V _{CC} = 5V, I _O = 100μA |
| | | | | | | |
| Input Voltage | V _{I(on)} | — | 1.9 | 3.0 | V | V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 2mA V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 1mA V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 10mA |
| | | | | | | |
| Output Voltage | V _{O(on)} | — | 0.1 | 0.3 | V | I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 10mA / 0.5mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 5mA / 0.25mA I _O /I _I = 10mA / 0.5mA |
| Input Current | I _I | — | — | 0.36 0.18 1.8 0.88 3.6 0.88 | mA | V _I = 5V |
| Output Current | I _{O(off)} | — | — | 0.5 | μA | V _{CC} = 50V, V _I = 0V |
| DC Current Gain | G _I | 56 68 20 68 80 30 | — | — | — | V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = 10V, I _E = 5mA, f = 100MHz |


* Transistor - For Reference Only

Ordering Information (Note 4)

| Device | Packaging | Shipping |
|------------|-----------|------------------|
| DDC124EH-7 | SOT-563 | 3000/Tape & Reel |
| DDC144EH-7 | SOT-563 | 3000/Tape & Reel |
| DDC143EH-7 | SOT-563 | 3000/Tape & Reel |
| DDC114YH-7 | SOT-563 | 3000/Tape & Reel |
| DDC123JH-7 | SOT-563 | 3000/Tape & Reel |
| DDC114EH-7 | SOT-563 | 3000/Tape & Reel |
| DDC143TH-7 | SOT-563 | 3000/Tape & Reel |
| DDC114TH-7 | SOT-563 | 3000/Tape & Reel |

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



NXX = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

| Year | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|
| Code | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

TYPICAL CURVES - DDC143EH

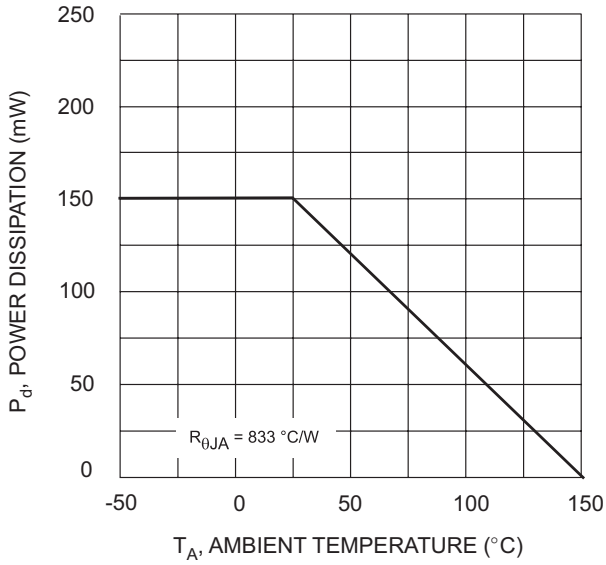


Fig. 1 Derating Curve

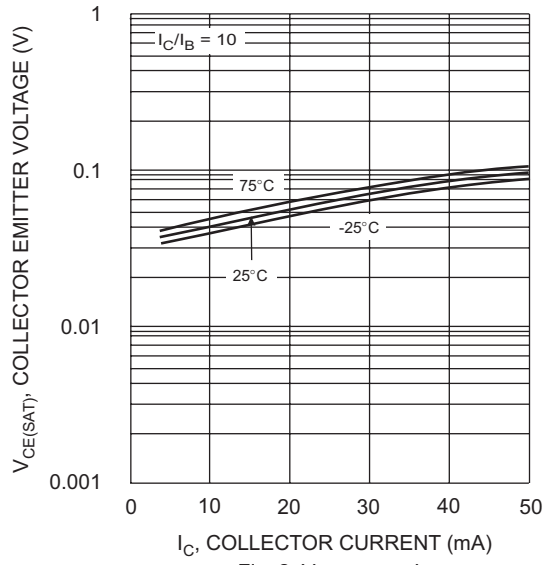


Fig. 2 $V_{CE(SAT)}$ vs. I_C

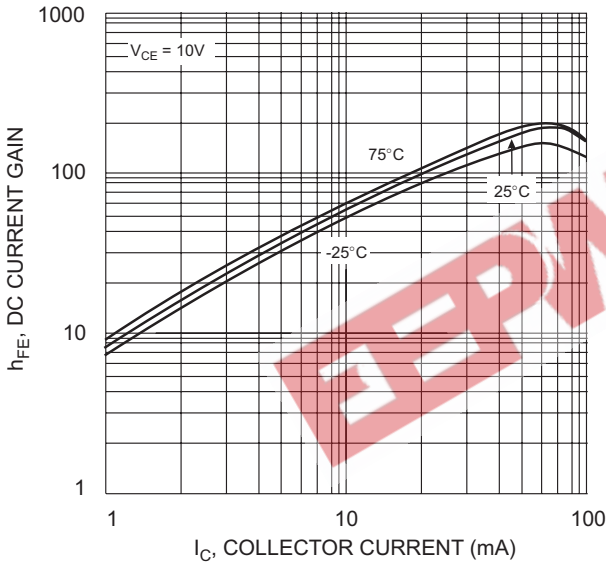


Fig. 3 DC Current Gain

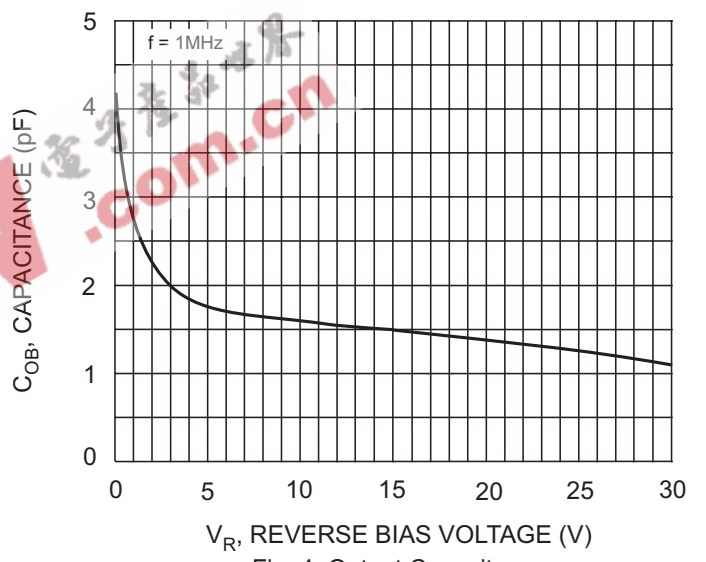


Fig. 4 Output Capacitance

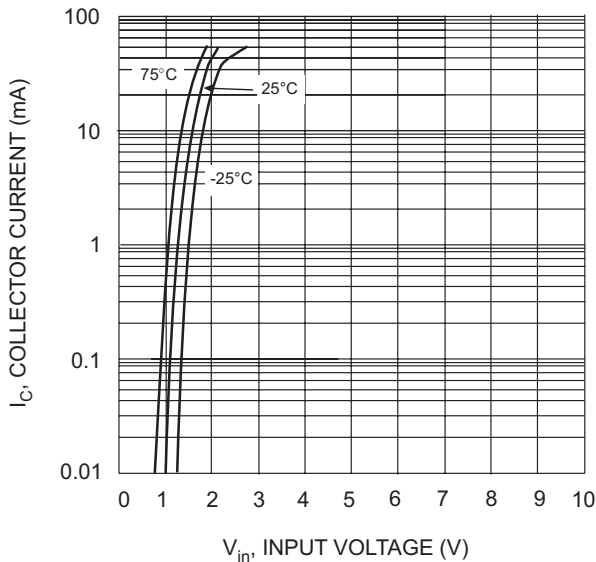


Fig. 5 Collector Current Vs. Input Voltage

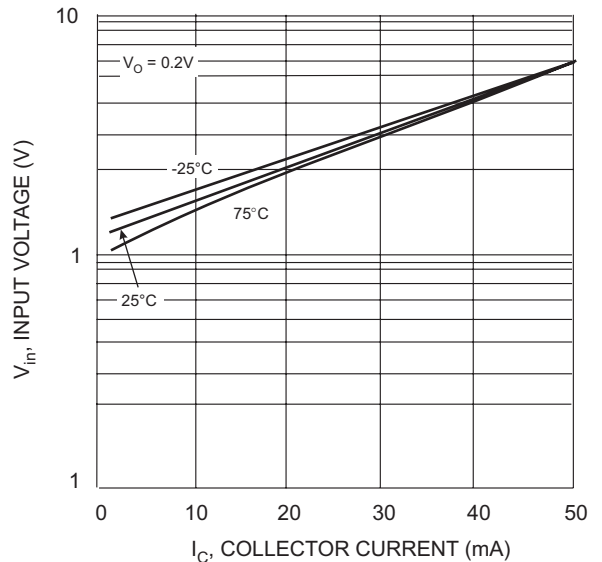


Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

EEPW 电子產品世界
.com.cn