


**FEATURES**

- 105°C Output Capacitor
- Low Cost, High Reliability
- Compact Size, Light Weight
- 100% Full Load Burn-In Tested
- Built-In EMI Filter, Low Ripple Noise
- High Efficiency, Low Working Temperature
- Short Circuit, Overload, and Over Voltage Protected

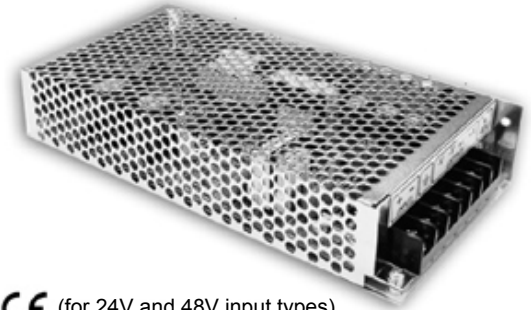

CE (for 24V and 48V input types)

**SPECIFICATIONS: DCSD-100 Series**

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
We reserve the right to change specifications based on technological advances.

**INPUT SPECIFICATIONS**

Input Voltage	DCSD-100B: 19 ~ 36VDC DCSD-100C: 36 ~ 72VDC DCSD-100D: 72 ~ 144VDC or 85~132VAC
AC Current	5V outputs: 6A at 24VDC 12V outputs: 3A at 48VDC 24V outputs: 1.5A at 96VDC
Inrush Current	DCSD-100D: 20A at 96VDC
Leakage Current	DCSD-100D: < 0.75mA at 120VAC

**OUTPUT SPECIFICATIONS**

Output Voltage	See Table
Output Voltage Tolerance (See Note 3)	5V outputs: ±2% 12V & 24V outputs: ±1%
Voltage Adjustability	See Table
Output Current	See Table
Line Regulation	5V outputs: ±0.5% 12V outputs: ±0.3% 24V outputs: ±0.2%
Load Regulation	5V outputs: ±0.5% 12V outputs: ±0.3% 24V outputs: ±0.2%
Ripple & Noise	See Table
Output Power	See Table
Setup, Rise, Hold Up Time	DCSD-100D (only): 2s, 50ms, 20ms

**PROTECTION**

Over Voltage Protection	5V outputs: 5.75 ~ 6.75V / 10% Load 12V outputs: 16.8 ~ 20V / 10% Load 24V outputs: 31.5 ~ 37.5V / 10% Load
Over Load Protection	105%~135% Type: Foldback Current Limiting Reset: Auto recovery.

**GENERAL SPECIFICATIONS**

Efficiency	See Table
Withstand Voltage	1.5KVAC (input to output), 1.5KVAC (input to FG), 0.5KVAC (output to FG)
Isolation Resistance	500VDC / 100MΩ (input to output, input to FG, output to FG)

**ENVIRONMENTAL SPECIFICATIONS**

Working Temperature	-10°C to +60°C (refer to output derating curve)
Storage Temperature	-20°C to +85°C
Working Humidity	20% to 90% RH
Storage Humidity	10% to 95% RH
Vibration	10~500Hz, 2G 10min./1cycle, Period for 60min. each axes
Temperature Coefficient	±0.03%/°C (0°C~50°C)

**PHYSICAL SPECIFICATIONS**

Weight	600 grams
Dimensions	199(L) x 98(W) x 38(H) mm

**SAFETY & EMC**

EMC Standards	EN55022 CLASS B (Radiation), EN61000-4-2,3,4,6,8 ENV50204 Verification for DCSD-100B/C Series only, not including DCSD-100D series.
---------------	---


**OUTPUT VOLTAGE / CURRENT RATING CHART**

Model	Input Voltage	Output Voltage	Voltage Adjustability	Rated Output Current	Output Ripple & Noise	Output Power	Efficiency
DCSD-100B-5	24 VDC (19 ~ 36 VDC)	5 VDC	4.5 ~ 5.5VDC	20A	100mVp-p	100W	74%
DCSD-100B-12		12 VDC	11 ~ 16VDC	8.5A	120mVp-p	102W	75%
DCSD-100B-24		24 VDC	23 ~ 30VDC	4.2A	150mVp-p	100.8W	76%
DCSD-100C-5	48 VDC (36 ~ 72 VDC)	5 VDC	4.5 ~ 5.5VDC	20A	100mVp-p	100W	75%
DCSD-100C-12		12 VDC	11 ~ 16VDC	8.5A	120mVp-p	102W	77%
DCSD-100C-24		24 VDC	23 ~ 30VDC	4.2A	150mVp-p	100.8W	80%
DCSD-100D-5	96 VDC (72 ~ 144 VDC)	5 VDC	4.5 ~ 5.5VDC	20A	100mVp-p	100W	78%
DCSD-100D-12		12 VDC	11 ~ 16VDC	8.5A	120mVp-p	102W	81%
DCSD-100D-24		24 VDC	23 ~ 30VDC	4.2A	150mVp-p	100.8W	83%

**NOTES**

1. The DCSD-100 Series is designated as DCSD-100x-y where x can be **B** (19 ~ 36 VDC input voltage), **C** (36 ~ 72 VDC input voltage), or **D** (72 ~ 144 VDC input voltage) and y can be 5, 12, or 24 for output voltage.
2. All parameters are specified at rated input, rated load and 25°C 70% RH. ambient.
3. Tolerance includes setup tolerance, line regulation, and load regulation.
4. Ripple & noise are measured at 20MHz using a 12" twisted pair terminated with a 0.1uF & 47uF capacitor.
5. Line regulation is measured from low line to high line at rated load.
6. Load regulation is measured from 0% to 100% rated load.

**DERATING CURVE**

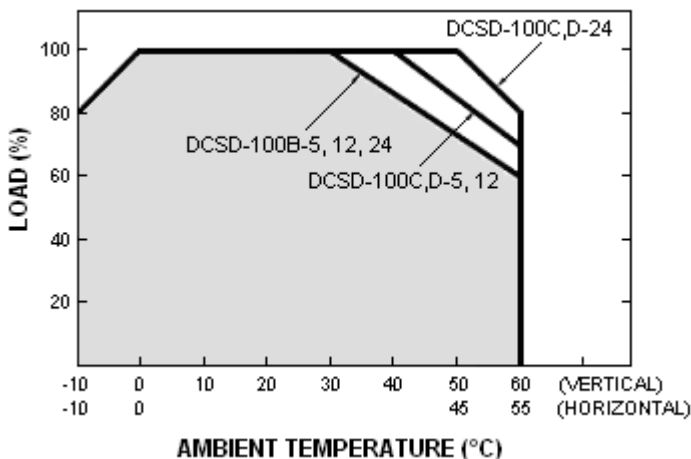

**STATIC CHARACTERISTICS (DCSD-100D-24)**

