

DDTC (R1≠R2 SERIES) KA

NPN PRE-BIASED SMALL SIGNAL SC-59
SURFACE MOUNT TRANSISTOR


NEW PRODUCT

Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTA)
- Built-In Biasing Resistors, R1≠R2


Mechanical Data

- Case: SC-59, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Weight: 0.006 grams (approx.)
- Ordering Information (See Page 2)

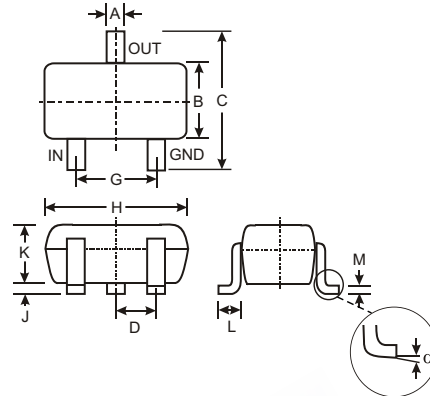

| SC-59 | | |
|----------------------|-------|------|
| Dim | Min | Max |
| A | 0.35 | 0.50 |
| B | 1.50 | 1.70 |
| C | 2.70 | 3.00 |
| D | 0.95 | |
| G | 1.90 | |
| H | 2.90 | 3.10 |
| J | 0.013 | 0.10 |
| K | 1.00 | 1.30 |
| L | 0.35 | 0.55 |
| M | 0.10 | 0.20 |
| α | 0° | 8° |
| All Dimensions in mm | | |

| P/N | R1 (NOM) | R2 (NOM) | MARKING |
|------------|----------|----------|---------|
| DDTC113ZKA | 1KΩ | 10KΩ | N02 |
| DDTC123YKA | 2.2KΩ | 10KΩ | N05 |
| DDTC123JKA | 2.2KΩ | 47KΩ | N06 |
| DDTC143XKA | 4.7KΩ | 10KΩ | N09 |
| DDTC143FKA | 4.7KΩ | 22KΩ | N10 |
| DDTC143ZKA | 4.7KΩ | 47KΩ | N11 |
| DDTC114YKA | 10KΩ | 47KΩ | N14 |
| DDTC114WKA | 10KΩ | 4.7KΩ | N15 |
| DDTC124XKA | 22KΩ | 47KΩ | N18 |
| DDTC144VKA | 47KΩ | 10KΩ | N21 |
| DDTC144WKA | 47KΩ | 22KΩ | N22 |

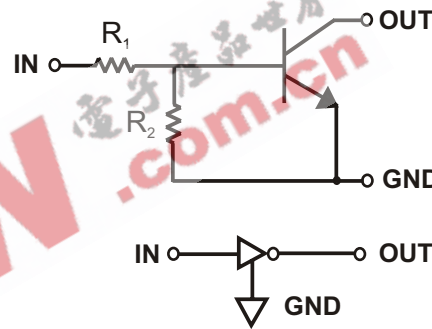

SCHEMATIC DIAGRAM

Maximum Ratings @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|---|------|
| Supply Voltage, (3) to (1) | V _{CC} | 50 | V |
| Input Voltage, (2) to (1) | V _{IN} | -5 to +10 -5 to +12 -5 to +12 -7 to +20 -6 to +30 -5 to +30 -6 to +40 -10 to +30 -10 to +40 -15 to +40 -10 to +40 | V |
| Output Current | I _O | 100 100 100 100 100 100 70 100 50 30 30 | mA |
| Output Current | I _C (Max) | 100 | mA |
| Power Dissipation | P _d | 200 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 1) | R _{θJA} | 625 | °C/W |
| Operating and Storage and Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics @ T_A = 25°C unless otherwise specified

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition | |
|----------------------------|--|---------------------------------|---|-----|--|------|--|--|
| Input Voltage | DDTC113ZKA DDTC123YKA DDTC123JKA DDTC143XKA DDTC143FKA DDTC143ZKA DDTC114YKA DDTC114WKA DDTC124XKA DDTC144VKA DDTC144WKA | V _{I(off)} | 0.3 0.3 0.5 0.3 0.3 0.5 0.3 0.8 0.4 1.0 0.8 | — | — | — | V | V _{CC} = 5V, I _O = 100μA |
| | DDTC113ZKA DDTC123YKA DDTC123JKA DDTC143XKA DDTC143FKA DDTC143ZKA DDTC114YKA DDTC114WKA DDTC124XKA DDTC144VKA DDTC144WKA | V _{I(on)} | — | — | 3.0 3.0 1.1 2.5 1.3 1.3 1.4 3.0 2.5 5.0 4.0 | — | V | V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 20mA V _O = 0.3V, I _O = 3mA V _O = 0.3V, I _O = 5mA V _O = 0.3V, I _O = 1mA V _O = 0.3V, I _O = 2mA V _O = 0.3V, I _O = 2mA V _O = 0.3V, I _O = 2mA V _O = 0.3V, I _O = 2mA |
| Output Voltage | | V _{O(on)} | — | 0.1 | 0.3 | V | I _O /I _I = 5mA/0.25mA DDTC123JKA I _O /I _I = 5mA/0.25mA DDTC143ZKA I _O /I _I = 5mA/0.25mA DDTC114YKA I _O /I _I = 10mA/0.5mA All Others | |
| Input Current | DDTC113ZKA DDTC123YKA DDTC123JKA DDTC143XKA DDTC143FKA DDTC143ZKA DDTC114YKA DDTC114WKA DDTC124XKA DDTC144VKA DDTC144WKA | I _I | — | — | 7.2 3.8 3.6 1.8 1.8 1.8 0.88 0.88 0.36 0.16 0.16 | mA | V _I = 5V | |
| Output Current | | I _{O(off)} | — | — | 0.5 | μA | V _{CC} = 50V, V _I = 0V | |
| DC Current Gain | DDTC113ZKA DDTC123YKA DDTC123JKA DDTC143XKA DDTC143FKA DDTC143ZKA DDTC114YKA DDTC114WKA DDTC124XKA DDTC144VKA DDTC144WKA | G _I | 33 33 80 30 68 80 68 24 68 33 56 | — | — | — | V _O = 5V, I _O = 10mA | |
| Input Resistor Tolerance | | DR ₁ | -30 | — | +30 | % | — | |
| Resistance Ratio Tolerance | | DR ₂ /R ₁ | -20 | — | +20 | % | — | |
| Gain-Bandwidth Product* | | f _T | — | 250 | — | MHz | V _{CE} = 10V, I _E = 5mA, f = 100MHz | |


* Transistor - For Reference Only

Ordering Information (Note 2)

| Device | Packaging | Shipping |
|--------------|-----------|------------------|
| DDTC113ZKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC123YKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC123JKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC143XKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC143FKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC143ZKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC114YKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC114WKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC124XKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC144VKA-7 | SC-59 | 3000/Tape & Reel |
| DDTC144WKA-7 | SC-59 | 3000/Tape & Reel |

Notes: 2. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

EEPW 电子产品世界
 .com.cn

TYPICAL CURVES - DDTC123JKA

NEW PRODUCT

