


SOLID TANTALUM ELECTROLYTIC CAPACITORS

nichicon

F95


Conformal coated
Chip

FRAMELESS™




Upgrade


● Adapted to the RoHS directive (2002/95/EC).

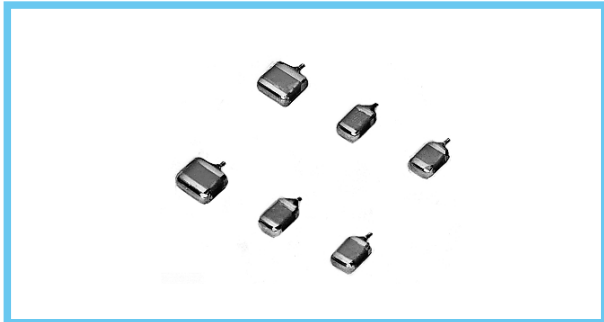

■ Type numbering system (Example : 35V 1.5 μF)

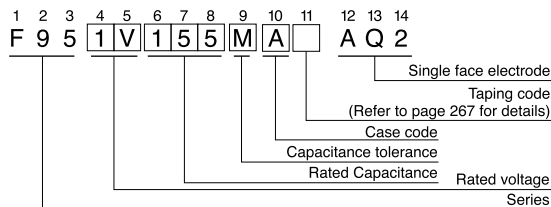

■ Drawing

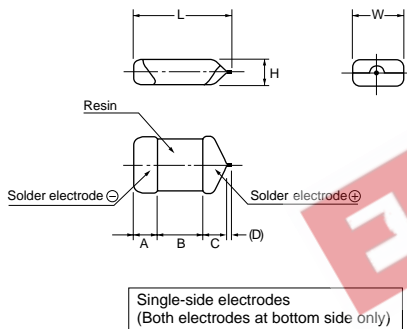

Single-side electrodes
(Both electrodes at bottom side only)

■ Dimensions

| case code | L | W | H | A | B | C | (D) |
|-----------|-----------|------------|-----------|-----------|-----------|-----------|-------|
| P | 2.2 ± 0.3 | 1.25 ± 0.3 | 1.0 ± 0.2 | 0.6 ± 0.3 | 0.8 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| Q | 3.2 ± 0.2 | 1.6 ± 0.2 | 0.8 ± 0.2 | 0.8 ± 0.2 | 1.2 ± 0.2 | 0.8 ± 0.2 | (0.2) |
| S | 3.2 ± 0.3 | 1.6 ± 0.3 | 1.0 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| A | 3.2 ± 0.3 | 1.7 ± 0.3 | 1.4 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 0.8 ± 0.3 | (0.2) |
| T | 3.5 ± 0.2 | 2.7 ± 0.2 | 1.0 ± 0.2 | 0.8 ± 0.2 | 1.2 ± 0.2 | 1.1 ± 0.2 | (0.2) |
| B | 3.3 ± 0.3 | 2.7 ± 0.3 | 1.8 ± 0.2 | 0.8 ± 0.3 | 1.2 ± 0.3 | 1.1 ± 0.3 | (0.2) |



D dimension only for reference

■ Standard ratings

| Cap. (μF) | V | Code | | | | | | |
|--------------|-----|-------------------|---------------------------|---------------------------|-------------------|-------|-------------|-----------|
| | | 4 | 6.3 | 10 | 16 | 20 | 25 | 35 |
| | | OG | OJ | 1A | 1C | 1D | 1E | 1V |
| 1 | 105 | | | | P | | P · S | P · S · A |
| 1.5 | 155 | | | | P | | S | A |
| 2.2 | 225 | | | | P | P · S | (P) · S · A | A |
| 3.3 | 335 | | | P | P | A | A | (A) · B |
| 4.7 | 475 | | | P | P | S · A | (Q) · S · A | (T) · B |
| 6.8 | 685 | | | P | | Q · A | (Q) | |
| 10 | 106 | | P | P | P · Q · S · A | A · B | (A) · B | |
| 15 | 156 | P | P | P | S · A | | | |
| 22 | 226 | P | P | P · Q · S · A | Q · S · A · T · B | B | | |
| 33 | 336 | P | P · Q · S · A | Q · S · A | (A) · (T) · B | | | |
| 47 | 476 | P · Q · S · A | P · Q · S · A | (P) · (Q) · S · A · T · B | B | | | |
| 68 | 686 | S · A | S · A | B | | | | |
| 100 | 107 | P · Q · S · A | (P) · (Q) · S · A · T · B | (T) · B | | | | |
| 150 | 157 | (P) · B | B | | | | | |
| 220 | 227 | S · A · T · B | (T) · B | | | | | |
| 330 | 337 | (S) · (A) · T · B | (B) | | | | | |
| 470 | 477 | (B) | | | | | | |

() The series in parentheses are being developed.
Please contact to your local Nichicon sales office when these series are being designed in your application.

Specifications

| Item | Performance Characteristics |
|-----------------------------------|--|
| Category | |
| Temperature Range | -55 ~ +125°C (Rated temperature : 85°C) |
| Capacitance Tolerance | ±20%, ±10% (at 120Hz) (However P.Q.T Case ±20%) |
| Dissipation Factor (at 120Hz) | Refer to P.235 |
| ESR(100kHz) | Refer to P.235 |
| Leakage Current | <ul style="list-style-type: none"> After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5 μA, whichever is greater. After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5 μA, whichever is greater. After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3 μA, whichever is greater. |
| Capacitance Change by Temperature | +15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C) |
| Damp Heat | At 40°C, 90 ~ 95% R.H., For 500 hours (No voltage applied) Capacitance Change Refer to next page (* 1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Temperature Cycles | At -55°C / +125°C, 30 minutes each, For 5 cycles, Capacitance Change Refer to next page (* 1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Resistance to Soldering Heat | Dipping Flow at 260°C for 10 seconds, reflow at 260°C for 10 seconds Capacitance Change Refer to next page (* 1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Surge* | After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below. Capacitance Change Refer to next page (* 1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Endurance* | After 2000 hours' application of rated voltage at 85°C, or derated voltage at 125°C, capacitors meet the characteristic requirements listed below. Capacitance Change Refer to next page (* 1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less |
| Shear Test | After applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.  |
| Terminal Strength | Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.  |

* As for the surge and derated voltage at 125°C, refer to page 266 for details.

CAT.8100V

SOLID TANTALUM ELECTROLYTIC CAPACITORS



F95

■ Standard ratings

| Rated Volt | Rated Capacitance (μF) | Case code | Part Number | Leakage Current (μA) | Dissipation Factor (%@120Hz) | ESR (Ω@100kHz) | *1 ΔC/C (%) | |
|------------|------------------------|-----------|----------------|----------------------|------------------------------|----------------|-------------|-----|
| 4V | 15 | P | F950G156MPAAQ2 | 0.6 | 10 | 1.8 | * | |
| | 22 | P | F950G226MPAAQ2 | 0.9 | 14 | 1.1 | * | |
| | 33 | P | F950G336MPAAQ2 | 1.3 | 14 | 1.1 | * | |
| | 47 | P | F950G476MPAAQ2 | 1.9 | 14 | 1.1 | * | |
| | 47 | Q | F950G476MQAAQ2 | 1.9 | 10 | 1.1 | * | |
| | 47 | S | F950G476MSAAQ2 | 1.9 | 10 | 0.8 | * | |
| | 47 | A | F950G476MAAAQ2 | 1.9 | 8 | 0.6 | * | |
| | 68 | S | F950G686MSAAQ2 | 2.7 | 10 | 0.8 | * | |
| | 68 | A | F950G686MAAAQ2 | 2.7 | 10 | 0.5 | * | |
| | 100 | P | F950G107MPAAQ2 | 4.0 | 30 | 1.2 | ±15 | |
| | 100 | Q | F950G107MQAAQ2 | 4.0 | 25 | 1.0 | ±15 | |
| | 100 | S | F950G107MSAAQ2 | 4.0 | 14 | 0.8 | * | |
| | 100 | A | F950G107MAAAQ2 | 4.0 | 12 | 0.5 | * | |
| | 150 | B | F950G157MBAAQ2 | 6.0 | 14 | 0.4 | * | |
| | 220 | S | F950G227MSAAQ2 | 8.8 | 25 | 0.8 | ±15 | |
| | 220 | A | F950G227MAAAQ2 | 8.8 | 25 | 0.8 | ±15 | |
| | 220 | T | F950G227MTAAQ2 | 8.8 | 25 | 0.6 | * | |
| | 220 | B | F950G227MBAAQ2 | 8.8 | 16 | 0.4 | * | |
| | 330 | T | F950G337MTAAQ2 | 13.2 | 40 | 0.8 | ±20 | |
| | 330 | B | F950G337MBAAQ2 | 13.2 | 30 | 0.6 | ±15 | |
| 6.3V | 10 | P | F950J106MPAAQ2 | 0.6 | 8 | 2.0 | * | |
| | 15 | P | F950J156MPAAQ2 | 0.9 | 10 | 1.8 | * | |
| | 22 | P | F950J226MPAAQ2 | 1.4 | 14 | 1.1 | * | |
| | 33 | P | F950J336MPAAQ2 | 2.1 | 14 | 1.1 | * | |
| | 33 | Q | F950J336MQAAQ2 | 2.1 | 10 | 2.0 | * | |
| | 33 | S | F950J336MSAAQ2 | 2.1 | 10 | 1.0 | * | |
| | 33 | A | F950J336MAAAQ2 | 2.1 | 8 | 0.8 | * | |
| | 47 | P | F950J476MPAAQ2 | 3.0 | 20 | 1.1 | ±15 | |
| | 47 | Q | F950J476MQAAQ2 | 3.0 | 10 | 1.1 | * | |
| | 47 | S | F950J476MSAAQ2 | 3.0 | 10 | 0.9 | * | |
| | 47 | A | F950J476MAAAQ2 | 3.0 | 10 | 0.6 | * | |
| | 68 | S | F950J686MSAAQ2 | 4.3 | 14 | 0.9 | * | |
| | 68 | A | F950J686MAAAQ2 | 4.3 | 12 | 0.5 | * | |
| | 100 | S | F950J107MSAAQ2 | 6.3 | 20 | 0.9 | ±15 | |
| | 100 | A | F950J107MAAAQ2 | 6.3 | 14 | 0.5 | * | |
| | 100 | T | F950J107MTAAQ2 | 6.3 | 14 | 0.6 | * | |
| | 100 | B | F950J107MBAAQ2 | 6.3 | 14 | 0.4 | * | |
| | 150 | B | F950J157MBAAQ2 | 9.5 | 18 | 0.4 | * | |
| | 220 | B | F950J227MBAAQ2 | 13.9 | 30 | 0.4 | * | |
| | 10V | 3.3 | P | F951A335MPAAQ2 | 0.5 | 8 | 5.0 | * |
| 4.7 | | P | F951A475MPAAQ2 | 0.5 | 8 | 4.0 | * | |
| 6.8 | | P | F951A685MPAAQ2 | 0.7 | 8 | 4.0 | * | |
| 10 | | P | F951A106MPAAQ2 | 1.0 | 8 | 3.0 | * | |
| 15 | | P | F951A156MPAAQ2 | 1.5 | 10 | 3.0 | * | |
| 22 | | P | F951A226MPAAQ2 | 2.2 | 14 | 3.0 | * | |
| 22 | | Q | F951A226MQAAQ2 | 2.2 | 10 | 2.0 | * | |
| 22 | | S | F951A226MSAAQ2 | 2.2 | 10 | 1.1 | * | |
| 22 | | A | F951A226MAAAQ2 | 2.2 | 6 | 0.9 | * | |
| 33 | | Q | F951A336MQAAQ2 | 3.3 | 18 | 3.0 | ±15 | |
| 33 | | S | F951A336MSAAQ2 | 3.3 | 10 | 1.1 | * | |
| 33 | | A | F951A336MAAAQ2 | 3.3 | 10 | 0.8 | * | |
| 47 | | S | F951A476MSAAQ2 | 4.7 | 14 | 1.1 | ±15 | |
| 47 | | A | F951A476MAAAQ2 | 4.7 | 10 | 0.8 | * | |
| 47 | | T | F951A476MTAAQ2 | 4.7 | 12 | 0.8 | * | |
| 47 | | B | F951A476MBAAQ2 | 4.7 | 8 | 0.4 | * | |
| 68 | | B | F951A686MBAAQ2 | 6.8 | 12 | 0.4 | * | |
| 100 | | B | F951A107MBAAQ2 | 10.0 | 14 | 0.4 | * | |
| 16V | | 1 | P | F951C105MPAAQ2 | 0.5 | 8 | 8.0 | * |
| | | 1.5 | P | F951C155MPAAQ2 | 0.5 | 8 | 8.0 | * |
| | 2.2 | P | F951C225MPAAQ2 | 0.5 | 8 | 6.0 | * | |
| | 3.3 | P | F951C335MPAAQ2 | 0.5 | 8 | 6.0 | * | |
| | 4.7 | P | F951C475MPAAQ2 | 0.8 | 10 | 4.0 | * | |
| | 10 | P | F951C106MPAAQ2 | 1.6 | 10 | 4.0 | * | |
| | 10 | Q | F951C106MQAAQ2 | 1.6 | 8 | 3.0 | * | |
| | 10 | S | F951C106MSAAQ2 | 1.6 | 8 | 2.0 | * | |
| | 10 | A | F951C106MAAAQ2 | 1.6 | 6 | 1.4 | * | |
| | 15 | S | F951C156MPAAQ2 | 2.4 | 8 | 2.0 | * | |
| | 15 | A | F951C156MAAAQ2 | 2.4 | 8 | 1.4 | * | |
| | 22 | Q | F951C226MQAAQ2 | 3.5 | 12 | 3.0 | * | |
| | 22 | S | F951C226MSAAQ2 | 3.5 | 10 | 2.0 | ±15 | |
| | 22 | A | F951C226MAAAQ2 | 3.5 | 8 | 1.4 | * | |
| | 22 | T | F951C226MTAAQ2 | 3.5 | 8 | 1.4 | * | |
| | 22 | B | F951C226MBAAQ2 | 3.5 | 6 | 0.5 | * | |
| | 33 | B | F951C336MBAAQ2 | 5.3 | 8 | 0.5 | * | |
| | 47 | B | F951C476MBAAQ2 | 7.5 | 10 | 0.6 | * | |
| | 20V | 2.2 | P | F951D225MPAAQ2 | 0.5 | 6 | 6.0 | * |
| | | 2.2 | S | F951D225MSAAQ2 | 0.5 | 6 | 5.0 | * |
| 3.3 | | A | F951D335MAAAQ2 | 0.7 | 6 | 2.0 | * | |
| 4.7 | | S | F951D475MSAAQ2 | 0.9 | 8 | 4.0 | * | |
| 4.7 | | A | F951D475MAAAQ2 | 0.9 | 6 | 1.5 | * | |
| 6.8 | | Q | F951D685MQAAQ2 | 1.4 | 10 | 4.0 | * | |
| 6.8 | | A | F951D685MAAAQ2 | 1.4 | 8 | 1.5 | * | |
| 10 | | A | F951D106MAAAQ2 | 2.0 | 8 | 1.5 | * | |
| 10 | | B | F951D106MBAAQ2 | 2.0 | 6 | 0.8 | * | |
| 22 | | B | F951D226MBAAQ2 | 4.4 | 8 | 0.8 | * | |
| 25V | 1 | P | F951E105MPAAQ2 | 0.5 | 6 | 8.0 | * | |
| | 1 | S | F951E105MSAAQ2 | 0.5 | 6 | 8.0 | * | |
| | 1.5 | S | F951E155MSAAQ2 | 0.5 | 6 | 7.0 | * | |
| | 2.2 | S | F951E225MSAAQ2 | 0.6 | 6 | 7.0 | * | |
| | 2.2 | A | F951E225MAAAQ2 | 0.6 | 6 | 3.2 | * | |
| | 3.3 | A | F951E335MAAAQ2 | 0.8 | 6 | 2.8 | * | |
| | 4.7 | S | F951E475MSAAQ2 | 1.2 | 8 | 4.0 | * | |
| | 4.7 | A | F951E475MAAAQ2 | 1.2 | 8 | 2.0 | * | |
| | 10 | B | F951E106MBAAQ2 | 2.5 | 6 | 0.9 | * | |
| | 35V | 1 | P | F951V105MPAAQ2 | 0.5 | 8 | 10.0 | ±10 |
| 1 | | S | F951V105MSAAQ2 | 0.5 | 6 | 8.0 | * | |
| 1 | | A | F951V105MAAAQ2 | 0.5 | 4 | 4.4 | * | |
| 1.5 | | A | F951V155MAAAQ2 | 0.5 | 6 | 4.4 | * | |
| 2.2 | | A | F951V225MAAAQ2 | 0.8 | 6 | 4.4 | * | |
| 3.3 | | B | F951V335MBAAQ2 | 1.2 | 6 | 1.6 | * | |
| 4.7 | | B | F951V475MBAAQ2 | 1.7 | 6 | 1.6 | * | |

* In case of capacitance tolerance ±10% type, [K] will be put at 9th digit of type numbering system.

*1 : ΔC/C

| Item | P·Q·S·A·T·B Case (%) |
|---------------------------|----------------------|
| Damp Heat | ±10 |
| Temperature cycles | ±5 |
| Resistance soldering heat | ±5 |
| Surge | ±5 |
| Endurance | ±10 |