


# **FRD Type : F10P20FR**

## OUTLINE DRAWING

### FEATURES

- \* Fully Molded Isolation
- \* Dual Diodes – Anode Common
- \* Ultra – Fast Recovery
- \* Low Forward Voltage Drop
- \* High Surge Capability
- \* 200 Volts thru 600 Volts Types Available

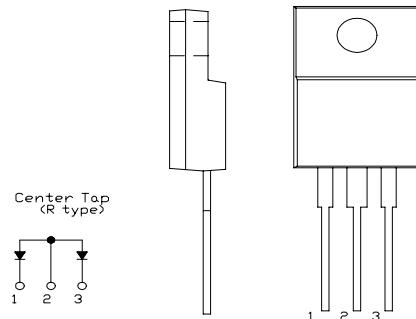

### Maximum Ratings

Approx Net Weight: 1.75g

Rating	Symbol	F10P20FR			Unit	
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	200			V	
Non-repetitive Peak Reverse Voltage	V <sub>RSM</sub>	220			V	
Average Rectified Output Current	I <sub>o</sub>	10	T <sub>c</sub> =117°C	50 Hz, Full Sine Wave Resistive Load	A	
RMS Forward Current	I <sub>F(RMS)</sub>	11.1			A	
Surge Forward Current	I <sub>FSM</sub>	80	50 Hz Full Sine Wave, 1cycle Non-repetitive			A
Operating Junction Temperature Range	T <sub>jw</sub>	- 40 to + 150			°C	
Storage Temperature Range	T <sub>stg</sub>	- 40 to + 150			°C	
Mounting torque		0.5	Recommended value			N•m

### Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I <sub>RM</sub>	T <sub>j</sub> =25°C, V <sub>RRM</sub> =V <sub>RSM</sub> per Arm	-	-	20	µA
Peak Forward Voltage	V <sub>FM</sub>	T <sub>j</sub> =25°C, I <sub>FM</sub> =5A per Arm	-	-	0.98	V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>FM</sub> = 5 A, -di/dt= 50 A/µs, T <sub>a</sub> = 25°C	-	-	35	ns
Thermal Resistance	R <sub>th(j-c)</sub>	Junction to Case	-	-	3	°C/W
	R <sub>th(c-f)</sub>	Case to Fin			1.5	

F10P20FR OUTLINE DRAWING (Dimensions in mm)

