

FOR BOARD-TO-BOARD CONNECTION

210 SERIES

■ FEATURES

- 1.27 mm (0.050 in.) pitch contact arrangement in two rows enables high-density mounting.
- Connectors are available with 30 to 120 contacts.
- Terminals are spaced in a four-row staggered arrangement (2.54 mm × 1.905 mm.) (0.100 in. × 0.075 in.) for easy PC board design.
- Sockets are available for board mounting and for 0.635 mm (0.025 in.) pitch flat cable.
[See the description of the FCN-210 series (for board-to-cable connection).]
- Insulation is UL-approved (94V-0).

■ SPECIFICATIONS

Item	Specifications
Operating temperature range	-55°C to +105°C
Current rating	DC 2 A
Voltage rating	AC 250 V
Contact resistance	35 mΩ max. (DC 6 V, 0.1 V)
Insulation resistance	1000 MΩ min. (DC 500 V)
Dielectric withstand voltage	500 VAC for 1 minute
Insertion force	4 kg max. (10 pins)
Withdrawal force	250 g min. (10 pins)
Applicable PC board (standard)	Thickness: 0.8 to 1.6 mm (0.031 to 0.063 in.)




■ MATERIALS

Item	Materials	
Insulator	Polyester (UL94V-0)	
Conductor	Copper alloy	
Plating	Contact	Gold plating
	Terminal	Palladium plating


210 Series

RIGHT-ANGLE SOCKET

■ DIMENSIONS

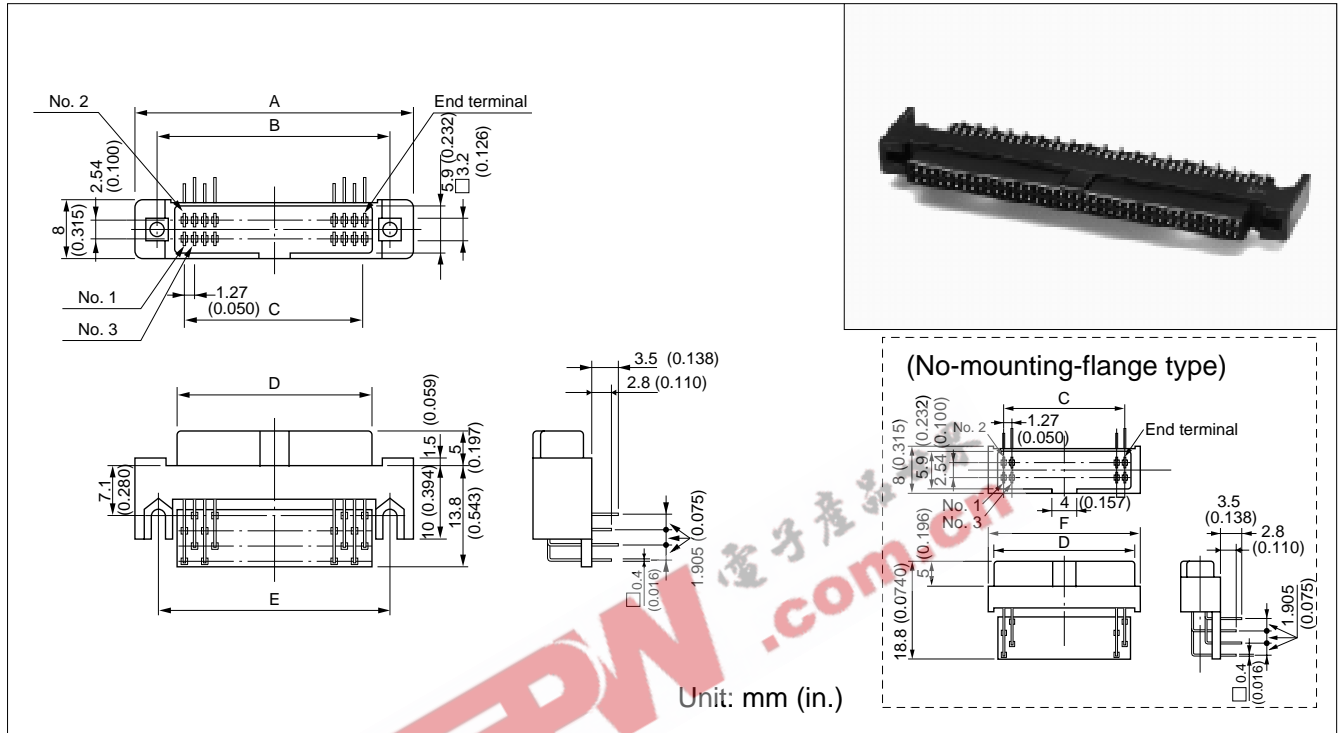

■ MOUNTING HOLE LAYOUT

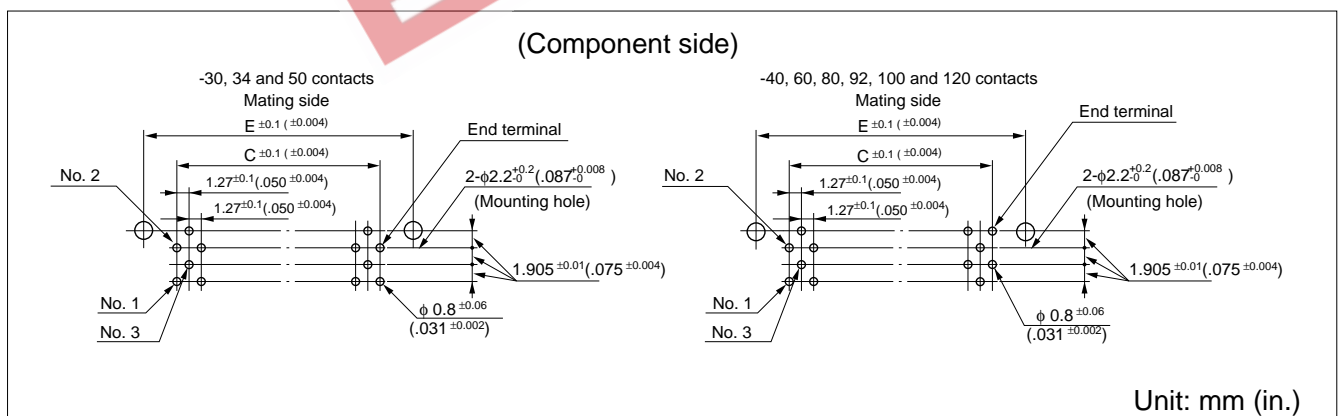

The no-mounting-flange type does not require the mounting hole of 2-φ2.2 mm (0.09 in.).

■ PART NUMBERS AND DIMENSIONS

Number of contacts	Part number	Dimensions: mm (in.)					
		A	B	C	D	E	F
30	FCN-215J030-G/0	31.83 (1.253)	26.28 (1.035)	17.78 (0.700)	20.68 (0.814)	25.28 (0.995)	23.08 (0.908)
34	FCN-215J034-G/0	34.73 (1.367)	28.82 (1.135)	20.32 (0.800)	23.22 (0.914)	27.82 (1.095)	34.37 (1.353)
40	FCN-215J040-G/0	38.18 (1.503)	32.63 (1.285)	24.13 (0.950)	27.03 (1.064)	31.63 (1.245)	38.18 (1.503)
50	FCN-215J050-G/0	44.35 (1.746)	38.98 (1.535)	30.48 (1.200)	33.38 (1.314)	37.98 (1.495)	44.53 (1.753)
60	FCN-215J060-G/0	50.88 (2.003)	45.33 (1.785)	36.83 (1.450)	39.73 (1.564)	44.33 (1.745)	50.88 (2.003)
80	FCN-215J080-G/0	63.58 (2.503)	58.03 (2.285)	49.53 (1.950)	52.43 (2.064)	57.03 (2.245)	63.58 (2.503)
92	FCN-215J092-G/0	71.20 (2.803)	65.65 (2.585)	57.15 (2.250)	60.05 (2.364)	64.65 (2.545)	71.20 (2.803)
100	FCN-215J100-G/0	76.28 (3.003)	70.73 (2.785)	62.23 (2.450)	65.13 (2.564)	69.73 (2.745)	76.28 (3.003)
120	FCN-215J120-G/0	88.98 (3.503)	83.43 (3.285)	74.93 (2.950)	77.83 (3.064)	82.43 (3.245)	88.98 (3.503)

Replace "-G/0" with "-G/A" for no-mounting-flange type

210 Series

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info.marketing@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2001 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 09/2001

EEPW 电子产品世界
.com.cn