


# 80 Amp Schottky Rectifier FST84100

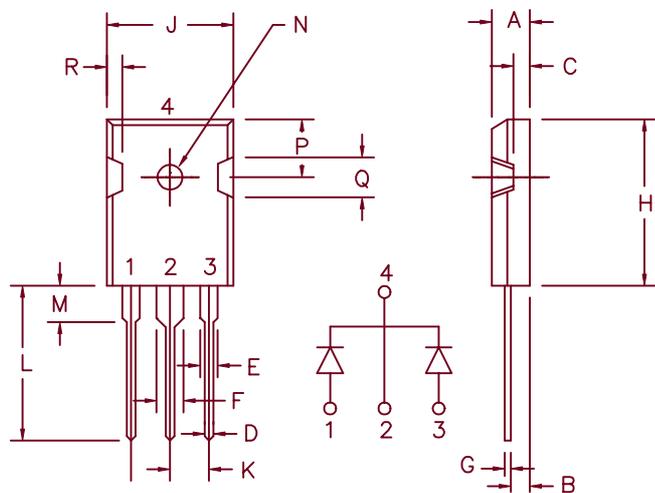

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog  
Number

FST84100

Industry  
Part Number

Repetitive Peak  
Reverse Voltage

100V

Transient Peak  
Reverse Voltage

100V

- Schottky Barrier Rectifier
- Guard ring reverse protection
- 2 X 40 Amperes Avg.
- 175°C Junction temperature
- VRRM 100V

## Electrical Characteristics

Average forward current  
Average forward current per leg  
Maximum surge current per leg  
Max. repetitive reverse current per leg  
Max. peak forward voltage per leg  
Max. peak forward voltage per leg  
Max. peak reverse current per leg  
Max. peak reverse current per leg  
Typical junction capacitance per leg

$I_F(AV)$  80 Amps  
 $I_F(AV)$  40 Amps  
 $I_{FSM}$  800 Amps  
 $I_R(OV)$  2 Amps  
 $V_{FM}$  .79 Volts  
 $V_{FM}$  .65 Volts  
 $I_{RM}$  5 mA  
 $I_{RM}$  1.5 mA  
 $C_j$  1530 pF

$T_C = 163^\circ\text{C}$ , square wave  
 $T_C = 163^\circ\text{C}$ , square wave  
8.3ms, half sine,  $T_J = 175^\circ\text{C}$   
 $f = 1\text{KHZ}$ ,  $25^\circ\text{C}$ , 1us square wave  
 $I_{FM} = 40\text{A}$ ,  $T_J = 25^\circ\text{C}^*$   
 $I_{FM} = 40\text{A}$ ,  $T_J = 175^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 125^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}$   
 $V_R = 5.0\text{V}$ ,  $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ . Duty Cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per leg  
Max thermal resistance per pkg  
Max thermal resistance per pkg  
Mounting Base Torque  
Weight

TSTG  
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta JC}$   
 $R_{\theta CS}$

$-55^\circ\text{C}$  to  $175^\circ\text{C}$   
 $-55^\circ\text{C}$  to  $175^\circ\text{C}$   
 $0.4^\circ\text{C/W}$   
 $0.2^\circ\text{C/W}$   
 $0.25^\circ\text{C/W}$   
10 inch pounds maximum  
.22 ounces (6.36 grams) typical

7-9-03 Rev. 2

# FST84100

Figure 1  
Typical Forward Characteristics – Per Leg



Figure 3  
Typical Junction Capacitance – Per Leg

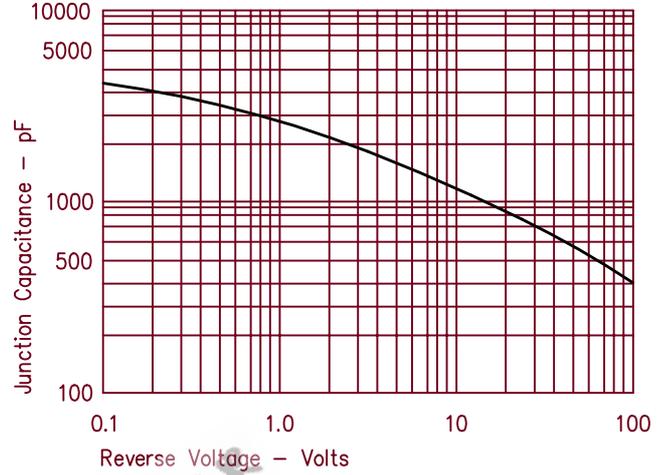


Figure 4  
Forward Current Derating – Per Leg

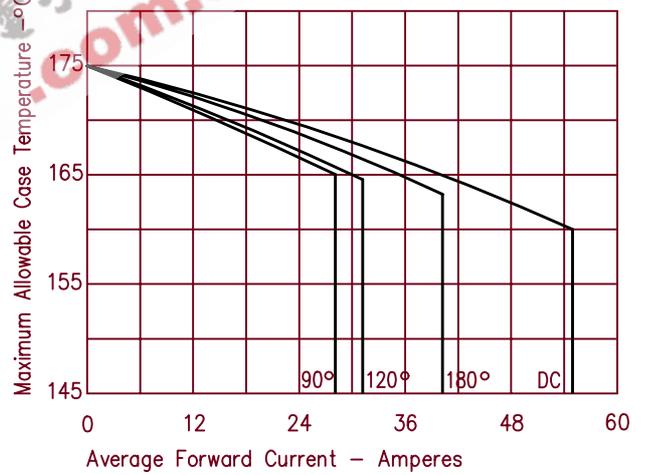


Figure 2  
Typical Reverse Characteristics – Per Leg

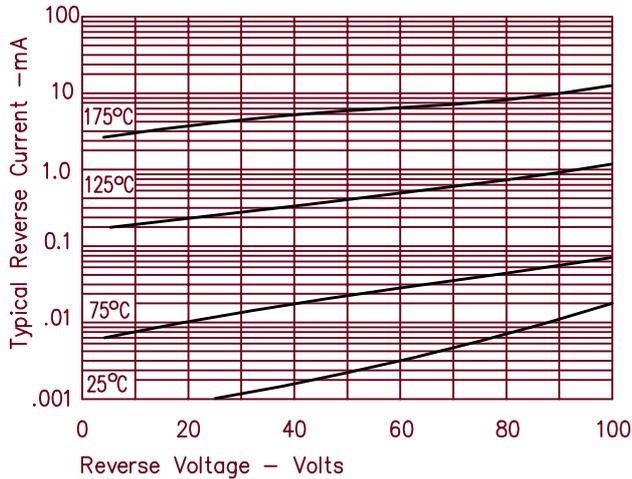


Figure 5  
Maximum Forward Power Dissipation – Per Leg

