


10 Amp Schottky Barrier Rectifiers FST1080 — FST10100

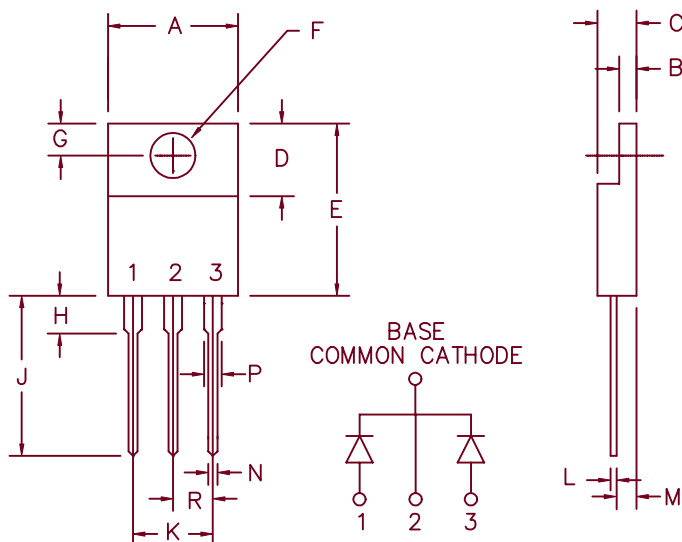

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.161	3.53	4.09	Dia.
G	.100	.135	2.54	3.43	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.022	.357	.559	
M	.080	.115	2.03	2.92	
N	.015	.040	.380	1.02	
P	.045	.070	1.14	1.78	
R	.090	.110	2.29	2.79	

PLASTIC TO-220AB

Technical Bulletin

Microsemi Catalog
Number

FST1080
FST1090
FST10100

Repetitive Peak
Reverse Voltage

80V
90V
100V

Transient Peak
Reverse Voltage

80V
90V
100V

- Schottky barrier rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- V_{RRM} 80 to 100 Volts

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Peak Reverse Current per leg
Typical Junction Capacitance

$I_F(AV)$ 10 Amps
 $I_F(AV)$ 5 Amps
 I_{FSM} 200 Amps
 V_{FM} .60 Volts
 V_{FM} .85 Volts
 I_{RM} 10 mA
 I_{RM} 250 μA
 C_J 280 pF

$T_C = 150^\circ C$, Square wave, $R_{\theta JC} = 2.8^\circ C/W$
 $T_C = 150^\circ C$, Square wave, $R_{\theta JC} = 5.6^\circ C/W$
8.3ms, half sine, $T_J = 175^\circ C$
 $I_{FM} = 5A, T_J = 175^\circ C^*$
 $I_{FM} = 5A, T_J = 25^\circ C^*$
 $V_{RRM}, T_J = 125^\circ C^*$
 $V_{RRM}, T_J = 25^\circ C$
 $VR = 5.0V, T_J = 25^\circ C$

*Pulse test: Pulse width 300 μsec Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg.
Typical thermal resistance per leg
Mounting torque
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$
 $R_{\theta JC}$

$-55^\circ C$ to $175^\circ C$
 $-55^\circ C$ to $175^\circ C$
 $5.6^\circ C/W$
 $2.8^\circ C/W$
 $4.7^\circ C/W$
15 inch pounds maximum (6-32 screw)
.08 ounces (2.3 grams) typical



COLORADO

Microsemi

800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469-2161
FAX: (303) 466-3775
www.microsemi.com

1-27-00 Rev. IR

FST1080 — FST10100

Figure 1
Typical Forward Characteristics – Per Leg

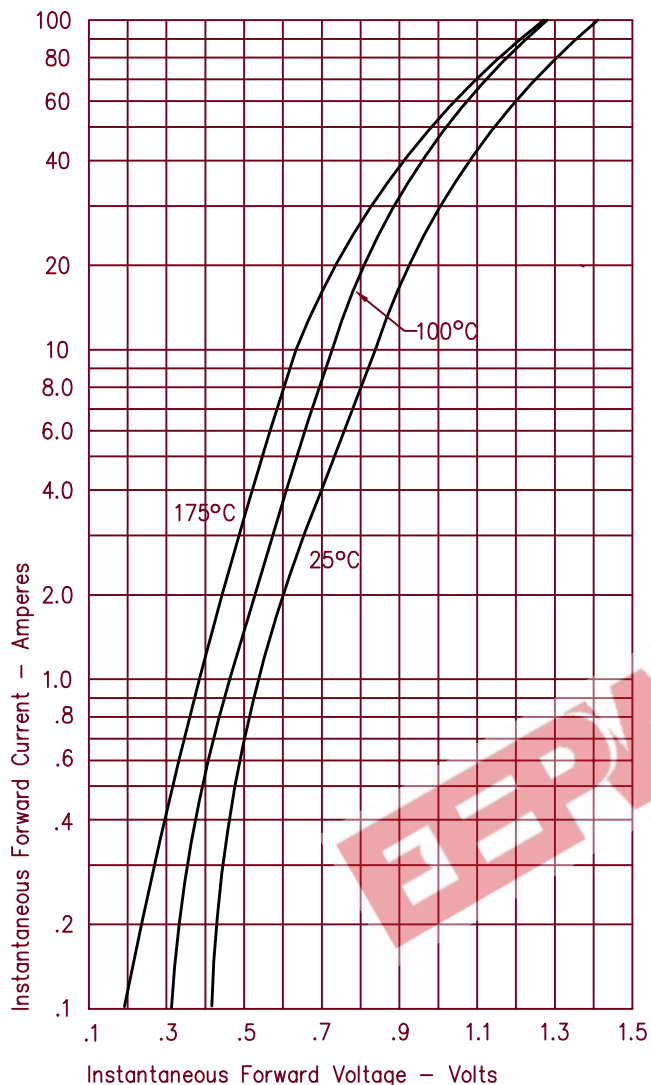


Figure 3
Typical Junction Capacitance – Per Leg

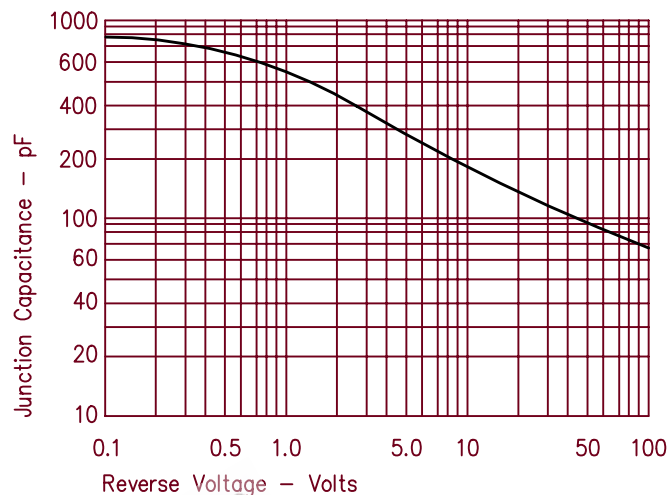


Figure 4
Forward Current Derating – Per Leg

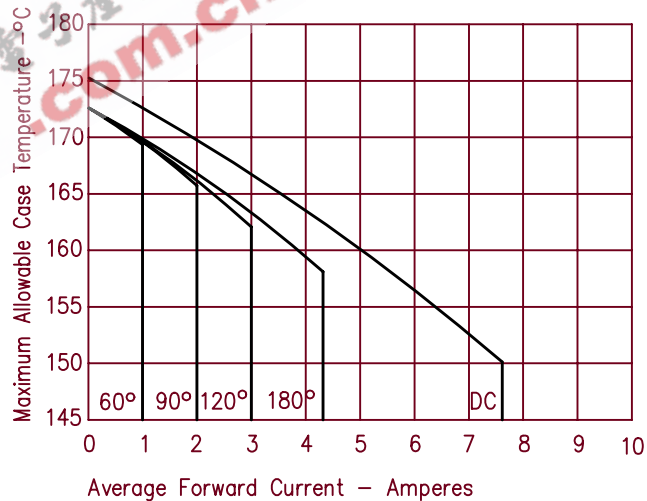


Figure 2
Typical Reverse Characteristics – Per Leg

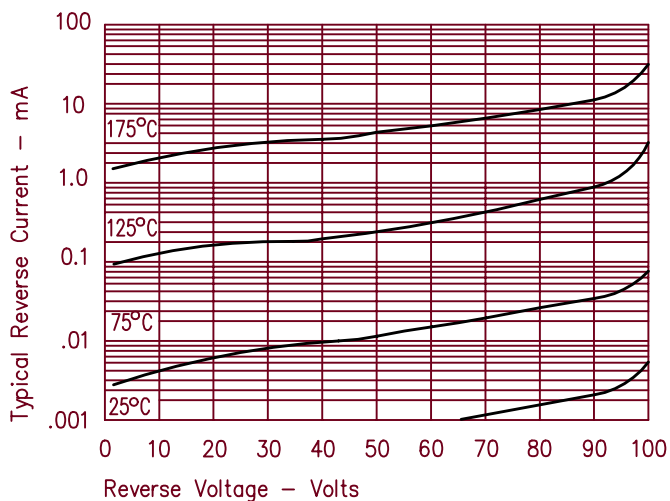


Figure 5
Maximum Forward Power Dissipation – Per Leg

