


Schottky MiniMod FST8035 - FST8050

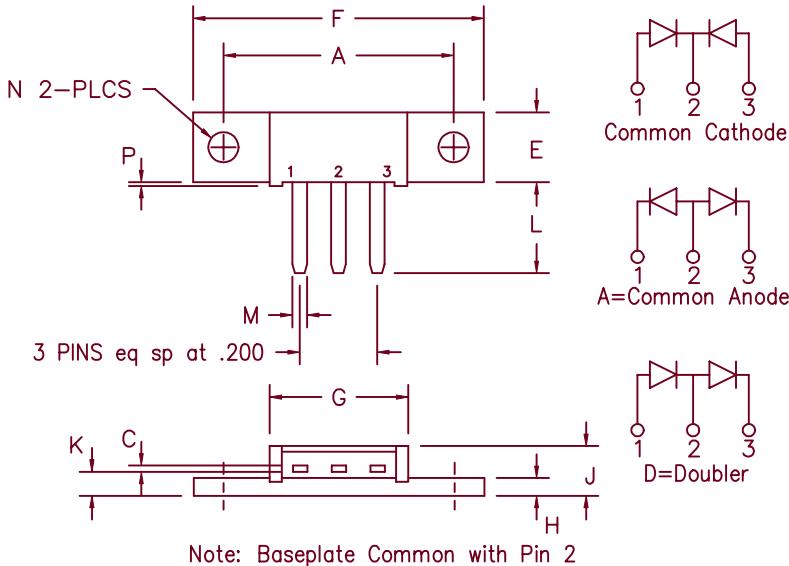

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	
P	.015	.025	0.38	0.64	Dia.

Microsemi
Catalog Number

Working
Peak Reverse
Voltage

Repetitive
Peak Reverse
Voltage

FST8035*
FST8040*
FST8045*
FST8050*

35V
40V
45V
50V

35V
40V
45V
50V

- Schottky Barrier Rectifier
- Guard Ring Protection
- 2X40 Amperes avg.
- 175°C Junction Temperature
- Reverse Energy Tested
- V_{RRM} – 35 to 50 Volts

*Add the Suffix A for Common Anode, D for Doubler

Electrical Characteristics

Average forward current per pkg
Average forward current per leg
Maximum surge current per leg
Max repetitive peak reverse current per leg
Max peak forward voltage per leg
Max peak forward voltage per leg
Max peak reverse current per leg
Max peak reverse current per leg
Typical junction capacitance per leg

| $I_F(AV)$ 80 Amps $T_C = 145^\circ C$, Square wave, $R_{\theta JC} = 0.5^\circ C/W$
| $I_F(AV)$ 40 Amps $T_C = 145^\circ C$, Square wave, $R_{\theta JC} = 1.0^\circ C/W$
| I_{FSM} 800 Amps 8.3 ms, half sine, $T_J = 175^\circ C$
| $I_R(OV)$ 2 Amps $f = 1$ KHZ, 25°C, 1 usec square wave
| V_{FM} 0.49 Volts $| I_{FM} = 40A; T_J = 175^\circ C^*$
| V_{FM} 0.68 Volts $| I_{FM} = 40A; T_J = 25^\circ C^*$
| I_{RM} 50 mA $V_{RRM}, T_J = 125^\circ C^*$
| I_{RM} 2 mA $V_{RRM}, T_J = 25^\circ C$
| C_J 1900 pF $V_R = 5.0V, T_C = 25^\circ C$

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	1.0°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.5°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight		0.3 ounce (8.4 grams) typical

FST8035 – FST8050

Figure 1
Typical Forward Characteristics – Per Leg

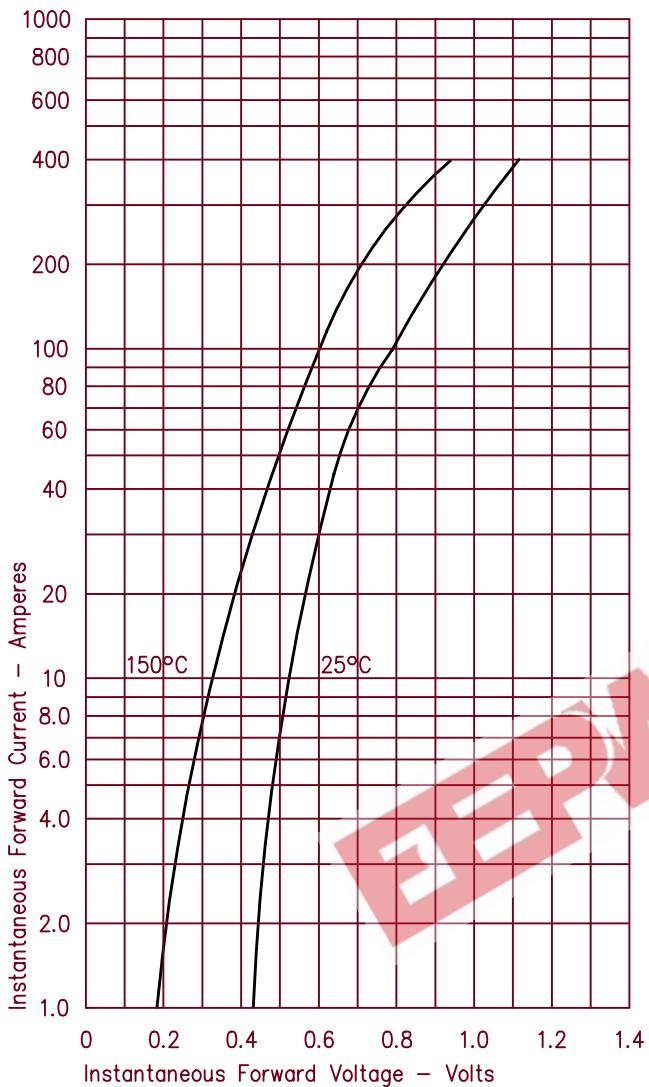


Figure 2
Typical Reverse Characteristics – Per Leg

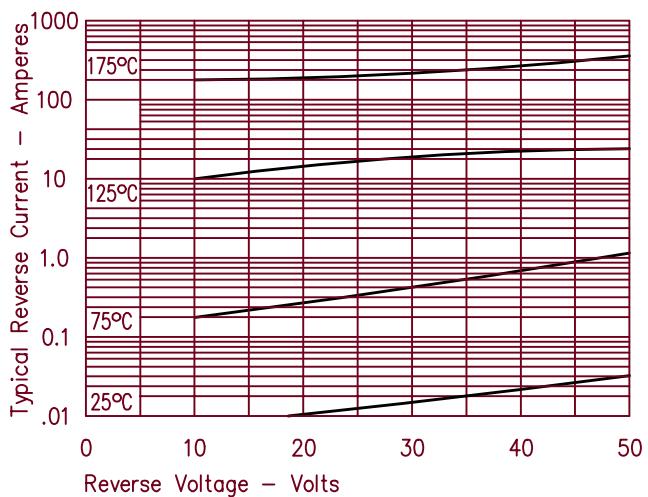


Figure 3
Typical Junction Capacitance – Per Leg

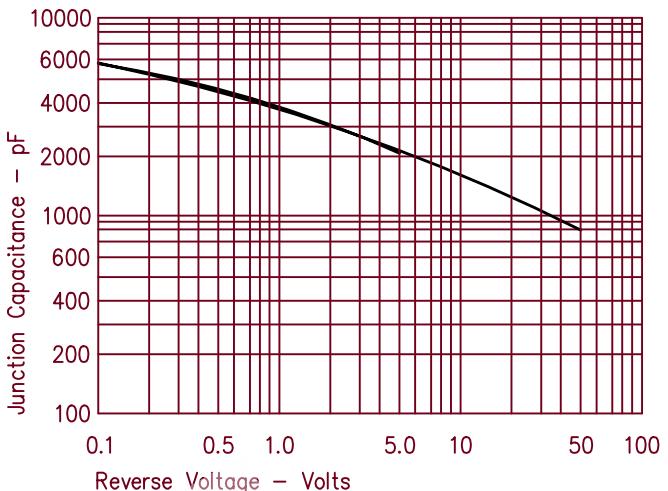


Figure 4
Forward Current Derating – Per Leg

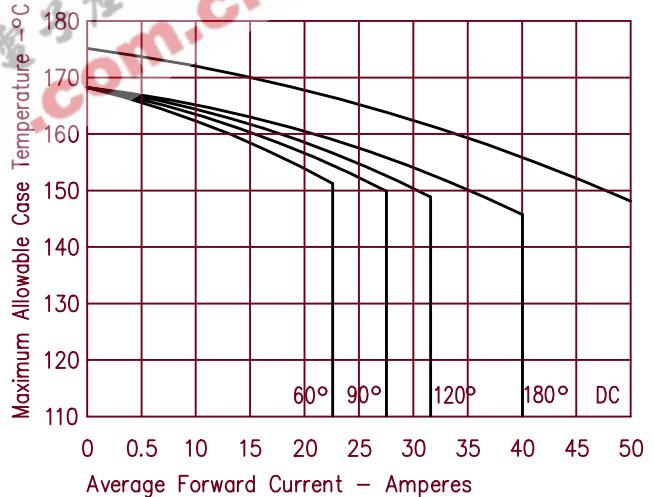


Figure 5
Maximum Forward Power Dissipation – Per Leg

