



Micro Commercial Components
 21201 Itasca Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

FST8420SL THRU FST8445SL

Features

- Metal of siliconrectifier, majonty carrier conducton
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability

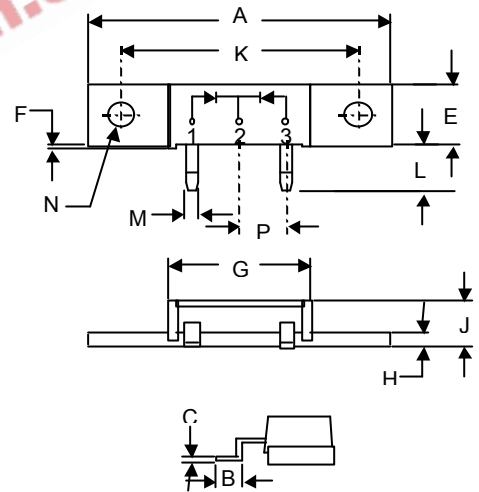
80 Amp Schottky Barrier Rectifier 20 to 45 Volts

Maximum Ratings

- Operating Temperature: -40°C to +175°C
- Storage Temperature: -40°C to +150°C

| MCC Part Number | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|----------------------------------------|---------------------|-----------------------------|
| FST8420SL | 20V | 14V | 20V |
| FST8430SL | 30V | 21V | 30V |
| FST8435SL | 35V | 24.5V | 35V |
| FST8440SL | 40V | 28V | 40V |
| FST8445SL | 45V | 31.5V | 45V |

MINIMOD-SL



Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|-----------------------------------------------------------|-------------|----------------|-------------------------------------------------------|
| Average Forward Current | $I_{F(AV)}$ | 80 A | $T_C = 110^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 800A | 8.3ms, half sine |
| Maximum Instantaneous Forward Voltage FST8420SL-8445SL | V_F | .63 V | $I_{FM} = 40.0A;$ $T_J = 25^\circ\text{C}$ |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | I_R | 3.0mA 500mA | $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ |
| Typical Junction Capacitance | C_J | 2100pF | Measured at 1.0MHz, $V_R=5.0V$ |

| DIM | DIMENSIONS | | | | NOTE |
|-----|------------|-------|-------|-------|------|
| | INCHES | | MM | | |
| | MIN | MAX | MIN | MAX | |
| A | 1.490 | 1.510 | 37.85 | 38.35 | |
| B | .110 | .120 | 2.79 | 3.04 | |
| C | .027 | .037 | 0.69 | 0.94 | |
| E | .350 | .370 | 8.89 | 9.40 | |
| F | .015 | .025 | 0.38 | 0.64 | |
| G | .695 | .715 | 17.65 | 18.16 | |
| H | .088 | .098 | 2.24 | 2.49 | |
| J | .240 | .260 | 6.10 | 6.60 | |
| K | 1.180 | 1.195 | 29.97 | 30.35 | |
| L | .230 | .250 | 5.84 | 6.35 | |
| M | .065 | .085 | 1.65 | 2.16 | |
| N | .151 | .161 | 3.84 | 4.09 | Ø |
| P | .200 | REF | 5.08 | REF | |

Pul se Test: Pulse Width 300µsec, Duty Cycle 2%

FST8420SL thru FST8445SL



Figure 1
Typical Forward Characteristics

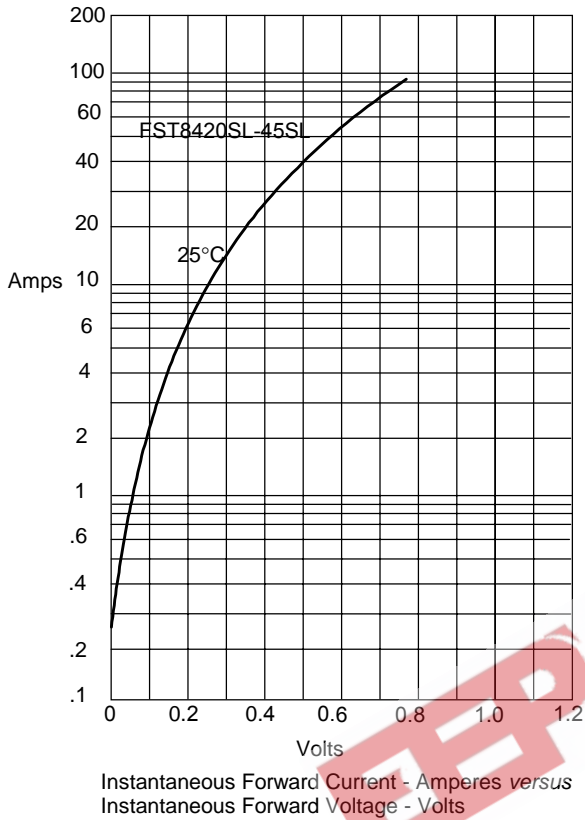


Figure 2
Forward Derating Curve

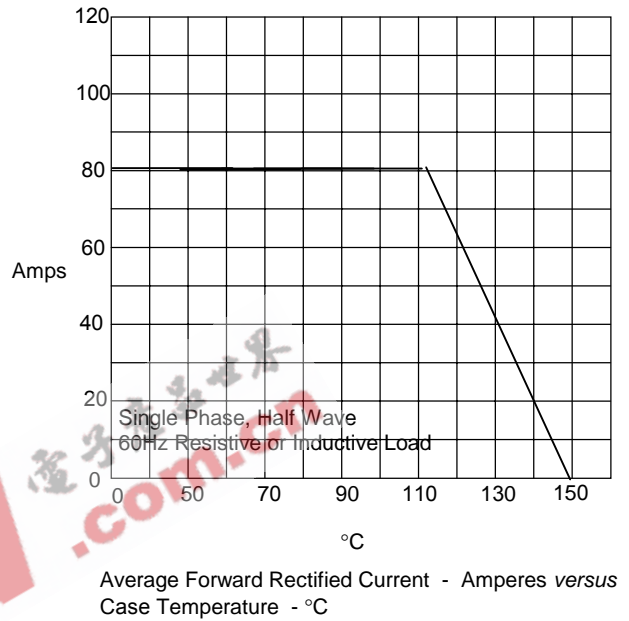


Figure 3
Junction Capacitance

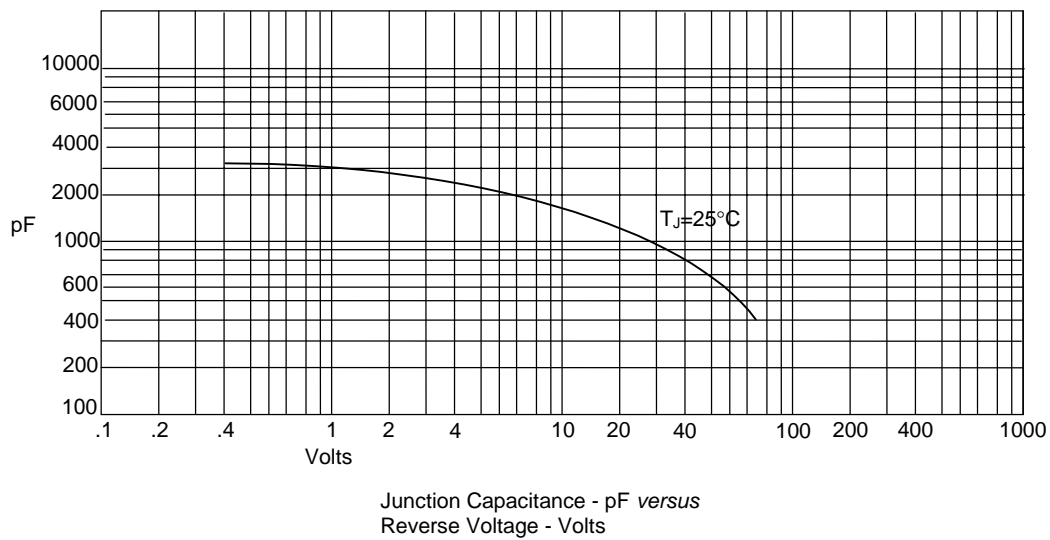
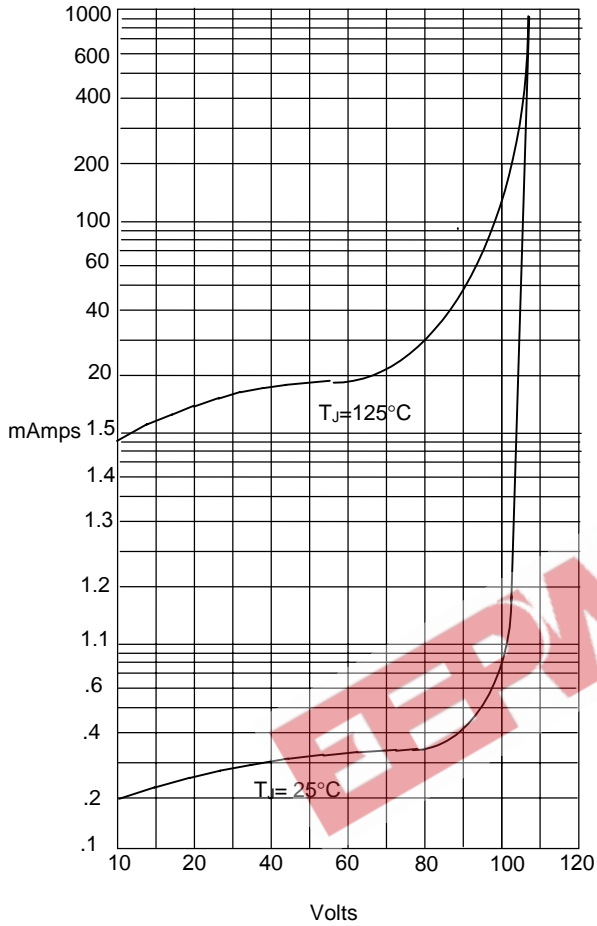


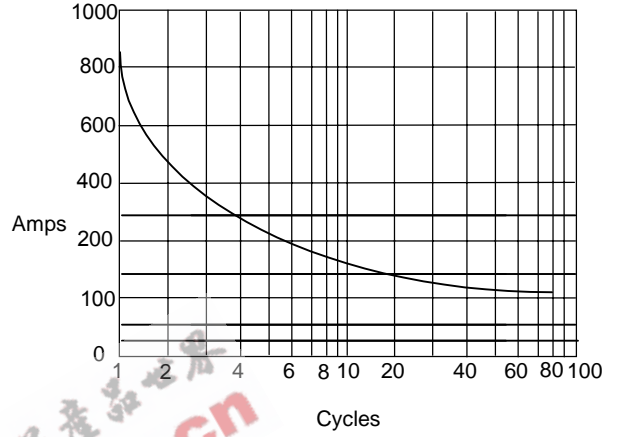


Figure 4
Typical Reverse Characteristics



Instantaneous Reverse Leakage Current - MicroAmperes versus Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current



Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles