


# Schottky MiniMod

## FST8130 - FST8145

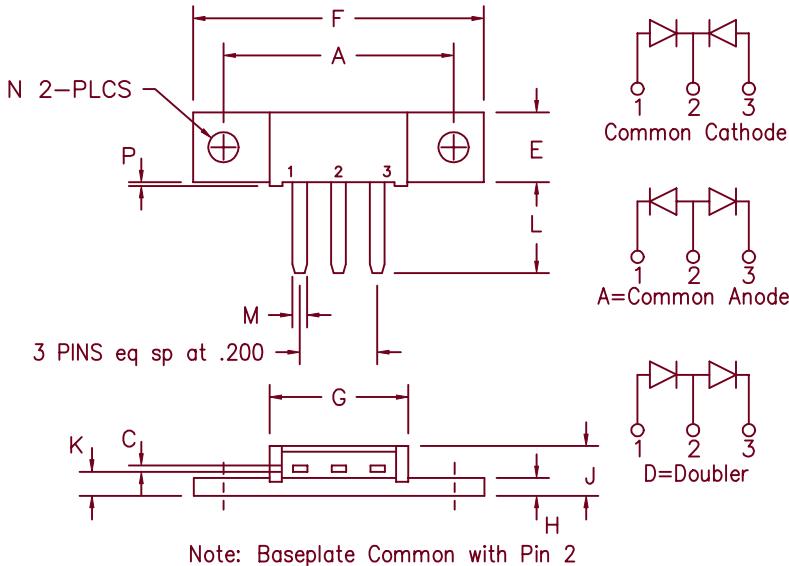

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	
P	.015	.025	0.38	0.64	Dia.

Note: Baseplate Common with Pin 2

Microsemi  
Catalog Number

Working  
Peak Reverse  
Voltage

Repetitive  
Peak Reverse  
Voltage

FST8130\*  
FST8135\*  
FST8140\*  
FST8145\*

30V  
35V  
40V  
45V

30V  
35V  
40V  
45V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 2X40 Amperes avg.
- 150°C Junction Temperature
- Reverse Energy Tested
- Low Forward Voltage

\*Add the Suffix A for Common Anode, D for Doubler

### Electrical Characteristics

Average forward current per pkg  
Average forward current per leg  
Maximum surge current per leg  
Max repetitive peak reverse current per leg  
Max peak forward voltage per leg  
Max peak forward voltage per leg  
Max peak reverse current per leg  
Max peak reverse current per leg  
Typical junction capacitance per leg

| F(AV) 80 Amps  
| F(AV) 40 Amps  
| FSM 800 Amps  
| R(OV) 2 Amps  
VFM 0.47 Volts  
VFM 0.53 Volts  
| RM 500 mA  
| RM 3.0 mA  
CJ 2100 pF

TC = 110°C, Square wave, R<sub>θJC</sub> = 0.5°C/W  
TC = 110°C, Square wave, R<sub>θJC</sub> = 1.0°C/W  
8.3 ms, half sine, TJ = 150°C  
f = 1 KHZ, 25°C, 1 usec square wave  
| FM = 40A; TJ = 150°C\*  
| FM = 40A; TJ = 25°C\*  
VRRM, TJ = 125°C\*  
VRRM, TJ = 25°C  
VR = 5.0V, TC = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range

T<sub>SG</sub>

-55°C to 175°C

Operating junction temp range

T<sub>J</sub>

-55°C to 150°C

Max thermal resistance per leg

R<sub>θJC</sub>

1.0°C/W Junction to case

Max thermal resistance per pkg

R<sub>θJC</sub>

0.5°C/W Junction to case

Typical thermal resistance (greased)

R<sub>θCS</sub>

0.3°C/W Case to sink

Mounting Base Torque

10 inch pounds maximum

Weight

0.3 ounce (8.4 grams) typical

# FST8130 – FST8145

Figure 1  
Typical Forward Characteristics – Per Leg

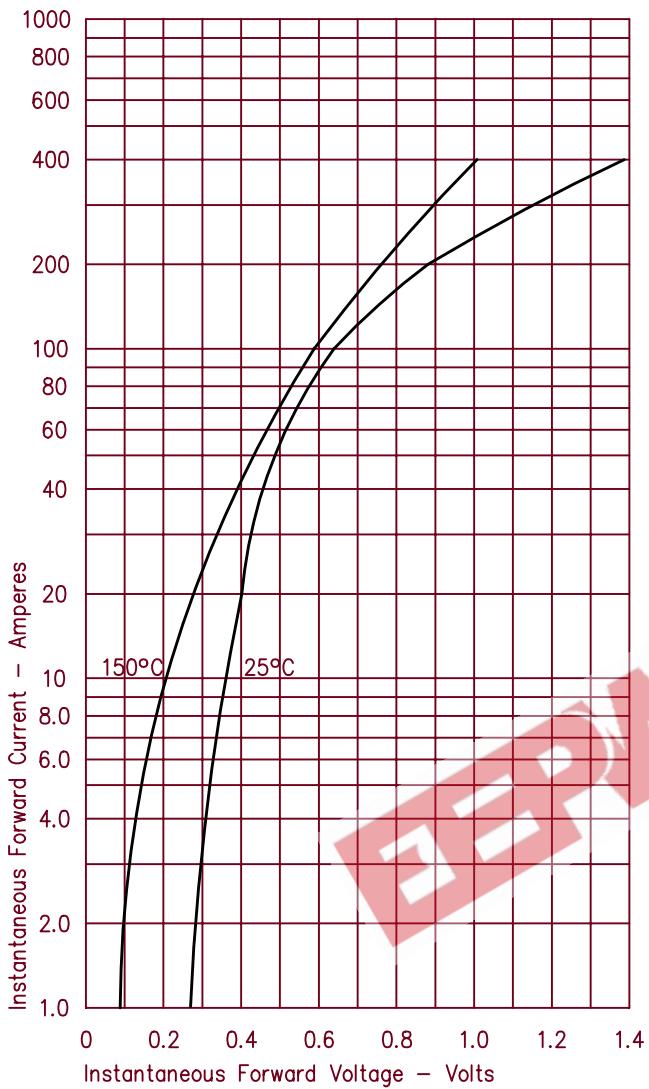


Figure 2  
Typical Reverse Characteristics – Per Leg

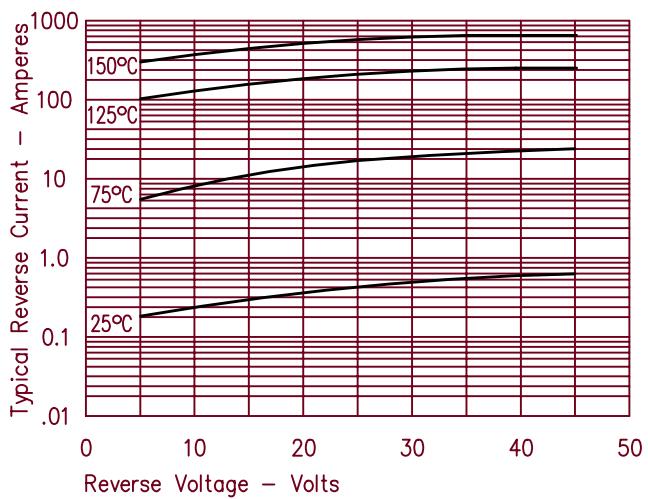


Figure 3  
Typical Junction Capacitance – Per Leg

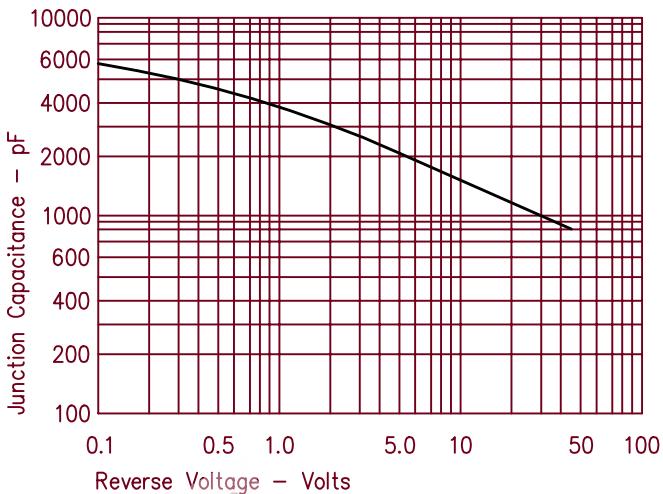


Figure 4  
Forward Current Derating – Per Leg

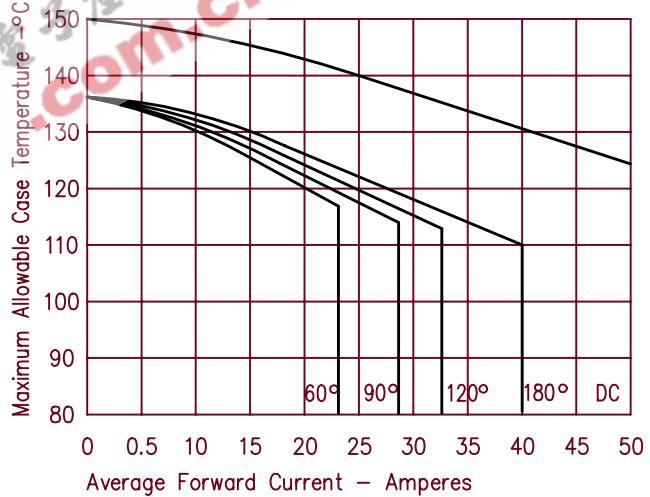


Figure 5  
Maximum Forward Power Dissipation – Per Leg

