


ISSUE 2 – FEBRUARY 1995

TYPICAL CHARACTERISTICS

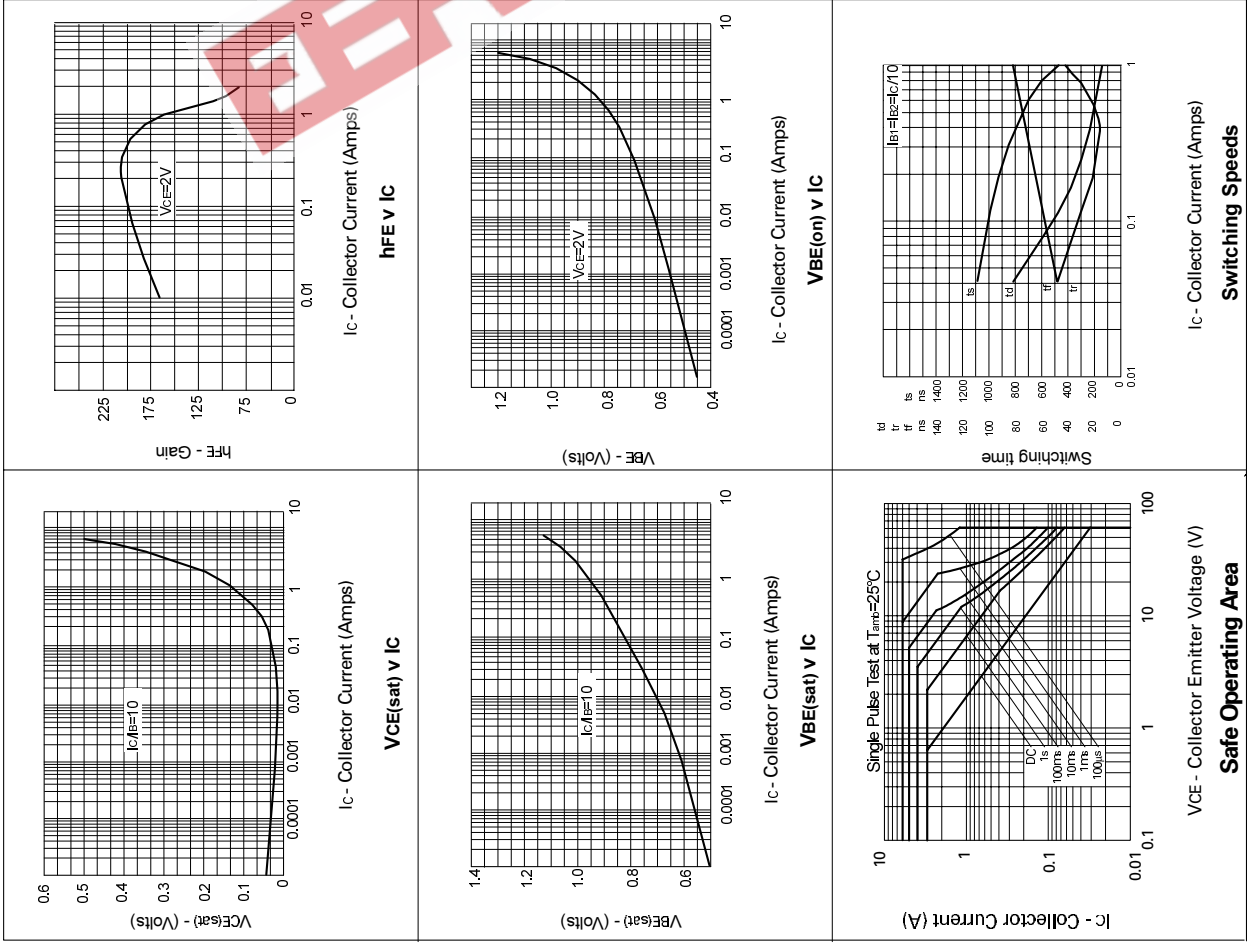

FEATURES

- * 60 Volt V_{CE0}
- * 3 Amp continuous current
- * Low saturation voltage

COMPLEMENTARY TYPE – FZT751

PARTMARKING DETAIL – FZT651


ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	6	A
Continuous Collector Current	I_C	3	A
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	2	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	80			V	$I_C=100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	60			V	$I_C=10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5			V	$I_E=100\mu A$
Collector Cut-Off Current	I_{CBO}			0.1	μA	$V_{CE}=60V, T_{amb}=100^{\circ}C$
Emitter Cut-Off Current	I_{EBO}			10	μA	$V_{EB}=4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		0.12	0.3	V	$I_C=1A, I_B=100mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		0.43	0.6	V	$I_C=3A, I_B=300mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		0.9	1.25	V	$I_C=1A, I_B=100mA^*$
Static Forward Current Transfer Ratio	h_{FE}	70	200	300		$I_C=50mA, V_{CE}=2V^*$ $I_C=500mA, V_{CE}=2V^*$ $I_C=1A, V_{CE}=2V^*$ $I_C=2A, V_{CE}=2V^*$
Transition Frequency	f_T	140	175		MHz	$I_C=100mA, V_{CE}=5V$ $f=100MHz$
Switching Times	t_{on}		45		ns	$I_C=500mA, V_{CC}=10V$ $I_B=I_{B2}=50mA$
	t_{off}		800		ns	
Output Capacitance	C_{obo}			30	pF	$V_{CB}=10V, f=1MHz$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device



ISSUE 2 – FEBRUARY 1995

FEATURES

- * 60 Volt V_{CE0}
- * 3 Amp continuous current
- * Low saturation voltage

COMPLEMENTARY TYPE – FZT751

PARTMARKING DETAIL – FZT651

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	6	A
Continuous Collector Current	I_C	3	A
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	2	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	80			V	$I_C = 100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	60			V	$I_C = 10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5			V	$I_E = 100\mu A$
Collector Cut-Off Current	I_{CBO}			0.1	μA	$V_{CB} = 60V, T_{amb} = 100^{\circ}C$
Emitter Cut-Off Current	I_{EBO}			10	μA	$V_{EB} = 4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		0.12	0.3	V	$I_C = 1A, I_B = 100mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		0.43	0.6	V	$I_C = 3A, I_B = 300mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		0.9	1.25	V	$I_C = 1A, I_B = 100mA^*$
Static Forward Current Transfer Ratio	h_{FE}	70	200	300		$I_C = 50mA, V_{CE} = 2V^*$ $I_C = 500mA, V_{CE} = 2V^*$ $I_C = 1A, V_{CE} = 2V^*$ $I_C = 2A, V_{CE} = 2V^*$
Transition Frequency	f_T	140	175		MHz	$I_C = 100mA, V_{CE} = 5V, f = 100MHz$
Switching Times	t_{on}		45		ns	$I_C = 500mA, V_{CC} = 10V, I_B = I_C = 50mA$
	t_{off}		800		ns	
Output Capacitance	C_{obo}			30	pF	$V_{CB} = 10V, f = 1MHz$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device

TYPICAL CHARACTERISTICS

