


MOS FET Relays

G3VM-81G1

**New Relay Incorporating a MOS FET
Optically Coupled with an Infrared LED
Has a 4-pin SOP Package and 80-V Load
Voltage**

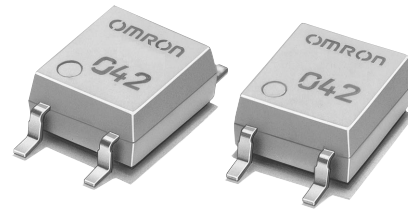

NEW

- Continuous load current of 350 mA.
- Dielectric strength of 1,500 Vrms between I/O.

Application Examples

- Broadband systems
- Measurement devices
- Data loggers
- Amusement machines

Note: The actual product is marked differently from the image shown here.



List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	80 VAC	G3VM-81G1	100	---
			G3VM-81G1(TR)	---	2,500

Dimensions

Note: All units are in millimeters unless otherwise indicated.


G3VM-81G1

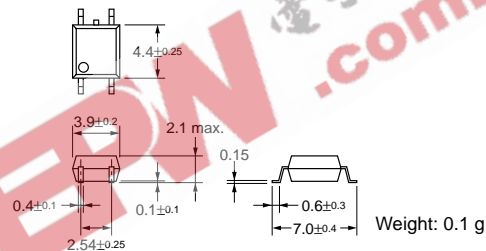

Note: The actual product is marked differently from the image shown here.


Terminal Arrangement/Internal Connections (Top View)

G3VM-81G1



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-81G1



Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement Conditions	
Input	LED forward current	IF	50	mA	
	Repetitive peak LED forward current	IFP	1	A	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	5	V	
	Connection temperature	Tj	125	°C	
Output	Output dielectric strength	V _{OFF}	80	V	
	Continuous load current	IO	350	mA	
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-3.5	mA/°C	Ta ≥ 25°C
	Connection temperature	Tj	125	°C	
Dielectric strength between input and output (See note 1.)		V _{I-O}	1,500	Vrms	AC for 1 min
Operating temperature		Ta	-40 to +85	°C	With no icing or condensation
Storage temperature		T _{stg}	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)		---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	VF	1.0	1.15	1.3	V	IF = 10 mA
	Reverse current	IR	---	---	10	μA	VR = 5 V
	Capacity between terminals	CT	---	15	---	pF	V = 0, f = 1 MHz
	Trigger LED forward current	IFT	---	1.0	4.0	mA	IO = 350 mA
Output	Maximum resistance with output ON	RON	---	1.0	1.2	Ω	IF = 5 mA, IO = 350 mA
	Current leakage when the relay is open	I _{LEAK}	---	0.2	1.0	nA	V _{OFF} = 30 V, Ta = 50°C
Capacity between I/O terminals		C _{I-O}	---	0.8	---	pF	f = 1 MHz, Vs = 0 V
Insulation resistance		R _{I-O}	1,000	---	---	MΩ	V _{I-O} = 500 VDC, RoH ≤ 60%
Turn-ON time		t _{ON}	---	0.3	0.5	ms	IF = 5 mA, RL = 200 Ω, V _{DD} = 20 V (See note 2.)
Turn-OFF time		t _{OFF}	---	0.3	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V _{DD}	---	---	64	V
Operating LED forward current	IF	5	---	30	mA
Continuous load current	IO	---	---	350	mA
Operating temperature	Ta	25	---	60	°C

Engineering Data

Load Current vs. Ambient Temperature

G3VM-81G1

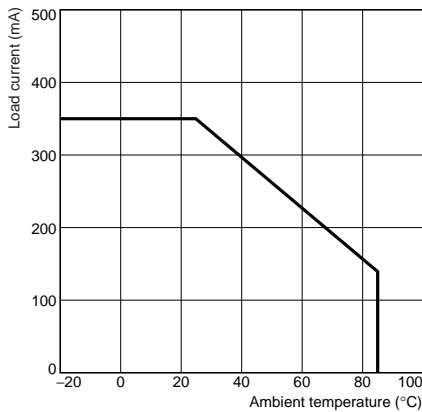

Safety Precautions

Refer to page 6 for precautions common to all G3VM models.