
HZ-LL Series

Silicon Epitaxial Planar Zener Diode for Hard Knee Low Noise

HITACHI

ADE-208-119A(Z)
Rev 1


Features

- V_Z - I_Z characteristics are semilogarithmic linear from $I_Z = 1\text{nA}$ to 1mA and have sharper breakdown knees in a low current region, and also lower V_Z temperature coefficients.
- Low dynamic impedance and low noise in the low current region (approximately 1/10 lower than the current zeners).

Ordering Information

Type No.	Mark	Package Code
HZ-LL Series	Type No.	DO-35

Outline

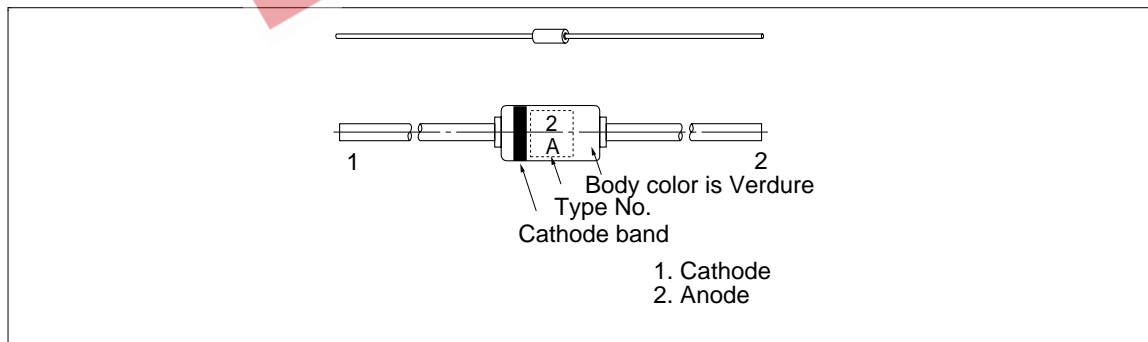

HZ-LL Series

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit
Power dissipation	Pd	250	mW
Junction temperature	Tj	175	°C
Storage temperature	Tstg	-55 to +175	°C

Electrical Characteristics (Ta = 25°C)

Type	Grade	V _Z (V) *1		I _R (nA)		Z _{ZT} (Ω)		Z _{ZK} (kΩ)*2		ΔV _{Z1} (V) *3	ΔV _{Z2} (V) *3	
		Min	Max	I _Z (mA)	Max	V _R (V)	Max	I _{ZT} (mA)	Typ	I _{ZK} (μA)	Max	Max
HZ2LL	A	1.6	2.0	0.5	100	0.5	350	0.5	(1.2)	50	0.5	0.6
	B	1.9	2.3									
	C	2.2	2.6									
HZ3LL	A	2.5	2.9	0.5	100	1.0	360	0.5	(1.2)	50	0.5	0.6
	B	2.8	3.2									
	C	3.1	3.5									
HZ4LL	A	3.4	3.8	0.5	100	2.0	370	0.5	(1.5)	50	0.5	0.6
	B	3.7	4.1									
	C	4.0	4.4									
HZ5LL	A	4.3	4.7	0.5	100	3.0	380	0.5	(1.5)	50	0.5	0.6
	B	4.6	5.0									
	C	4.9	5.3									

Notes: 1. Tested with DC.

2. Reference only.

3. $\Delta V_{Z1} = V_Z (I_Z = 0.5 \text{ mA}) - V_{Z1} (I_Z = 0.05 \text{ mA})$ $\Delta V_{Z2} = V_{Z1} (I_Z = 0.05 \text{ mA}) - V_{Z2} (I_Z = 0.001 \text{ mA})$

4. Type No. is as follows; HZ2ALL, HZ2BLL, HZ5CLL.

Main Characteristic

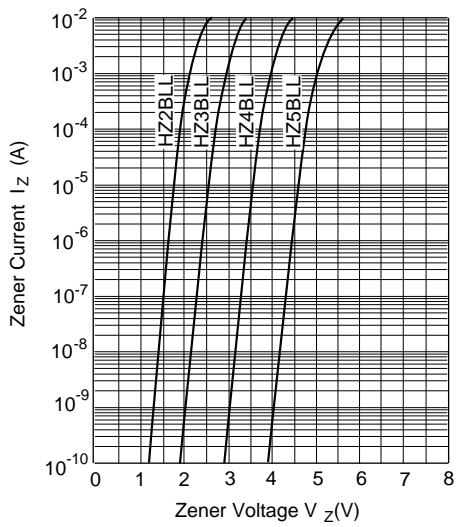


Fig.1 Zener current Vs. Zener voltage

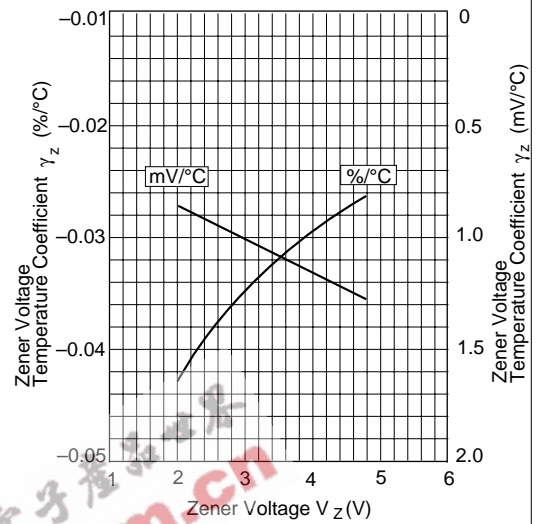


Fig.2 Temperature Coefficient Vs. Zener voltage

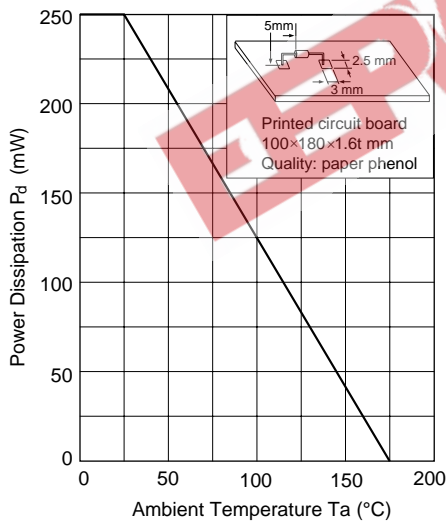


Fig.3 Power Dissipation Vs. Ambient Temperature

HZ-LL Series

Package Dimensions

Unit : mm

