


# HiPerFET™ Power MOSFETs

**IXFH 26N60/IXFT 26N60  
IXFK 28N60**

| $V_{DSS}$ | $I_{D25}$ | $R_{DS(on)}$  |
|-----------|-----------|---------------|
| 600 V     | 26 A      | 0.25 $\Omega$ |
| 600 V     | 28 A      | 0.25 $\Omega$ |




$t_{rr} \leq 250$  ns

N-Channel Enhancement Mode  
Avalanche Rated, High dv/dt, Low  $t_{rr}$



Preliminary data

| Symbol    | Test Conditions  | Maximum Ratings |          |                  |
|-----------|--|-----------------|----------|------------------|
|           |  | IXFH/ IXFT      | IXFK     |                  |
| $V_{DSS}$ | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$  | 600             | 600      | V                |
| $V_{DGR}$ | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GS} = 1$ M $\Omega$  | 600             | 600      | V                |
| $V_{GS}$  | Continuous   | $\pm 20$        | $\pm 20$ | V                |
| $V_{GSM}$ | Transient  | $\pm 30$        | $\pm 30$ | V                |
| $I_{D25}$ | $T_C = 25^\circ\text{C}$ , Chip capability   | 26              | 28       | A                |
| $I_{DM}$  | $T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$   | 104             | 112      | A                |
| $I_{AR}$  | $T_C = 25^\circ\text{C}$   | 26              | 28       | A                |
| $E_{AR}$  | $T_C = 25^\circ\text{C}$   | 50              | 50       | mJ               |
| $E_{AS}$  | $T_C = 25^\circ\text{C}$   | 1.5             | 1.5      | J                |
| dv/dt     | $I_S \leq I_{DM}$ , $di/dt \leq 100$ A/ $\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 2$ $\Omega$ | 5               | 5        | V/ns             |
| $P_D$     | $T_C = 25^\circ\text{C}$   | 360             | 416      | W                |
| $T_J$     |  | -55 ... +150    |          | $^\circ\text{C}$ |
| $T_{JM}$  |  |                 | 150      | $^\circ\text{C}$ |
| $T_{stg}$ |  | -55 ... +150    |          | $^\circ\text{C}$ |
| $T_L$     | 1.6 mm (0.063 in) from case for 10 s   | 300             | 300      | $^\circ\text{C}$ |
| $M_d$     | Mounting torque  | 1.13/10         | 0.9/6    | Nm/lb.in.        |
| Weight    |  | 6               | 10       | g                |

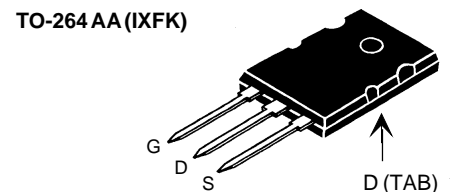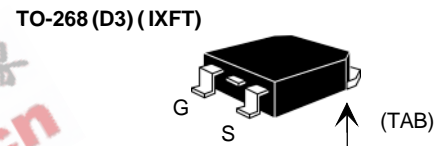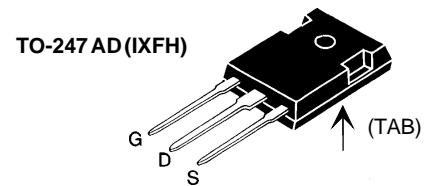

G = Gate  
S = Source      TAB = Drain  
Either Source terminal at miniBLOC can be used as Main or Kelvin Source

| Symbol       | Test Conditions  | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                          |
|--------------|--|---|------|--------------------------|
|              |  | min.  | typ. | max.                     |
| $V_{DSS}$    | $V_{GS} = 0$ V, $I_D = 250$ $\mu\text{A}$  | 600   |      | V                        |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 4$ mA   | 2   |      | 4.5 V                    |
| $I_{GSS}$    | $V_{GS} = \pm 20$ V <sub>DC</sub> , $V_{DS} = 0$   |   |      | $\pm 200$ nA             |
| $I_{DSS}$    | $V_{DS} = 0.8 \cdot V_{DSS}$ , $T_J = 25^\circ\text{C}$<br>$V_{GS} = 0$ V, $T_J = 125^\circ\text{C}$           |   |      | 25 $\mu\text{A}$<br>1 mA |
| $R_{DS(on)}$ | $V_{GS} = 10$ V, $I_D = 0.5 \cdot I_{D25}$<br>Pulse test, $t \leq 300$ $\mu\text{s}$ , duty cycle $d \leq 2$ % |   |      | 0.25 $\Omega$            |

## Features


- International standard packages
- Epoxy meet UL94V-0, flammability classification
- Low  $R_{DS(on)}$  HDMOS™ process
- Rugged polysilicon gate cell structure
- Avalanche energy and current rated
- Fast intrinsic Rectifier

## Advantages

- Easy to mount
- Space savings
- High power density


| Symbol       | Test Conditions  | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |              |              |            |
|--------------|--|---|--------------|--------------|------------|
|              |  | min.  | typ.         | max.         |            |
| $g_{fs}$     | $V_{DS} = 10\text{ V}; I_D = 0.5 \cdot I_{D25}$ , pulse test   | 11  | 18           | S            |            |
| $C_{iss}$    | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$  |   | 5000         | pF           |            |
| $C_{oss}$    |  |   | 600          | pF           |            |
| $C_{rss}$    |  |   | 250          | pF           |            |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$<br>$R_G = 1.5\ \Omega$ (External), |   | 30           | ns           |            |
| $t_r$        |  |   | 43           | ns           |            |
| $t_{d(off)}$ |  |   | 110          | ns           |            |
| $t_f$        |  |   | 30           | ns           |            |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$                                    |   | 250          | 300          | nC         |
| $Q_{gs}$     |  |   | 33           | 45           | nC         |
| $Q_{gd}$     |  |   | 115          | 150          | nC         |
| $R_{thJC}$   |  | 26N60<br>28N60  |              | 0.35<br>0.30 | K/W<br>K/W |
| $R_{thCK}$   | TO-247<br>TO-264   |   | 0.25<br>0.15 |              | K/W<br>K/W |

### TO-247 AD (IXFH) Outline



| Dim. | Millimeter |       | Inches |       |
|------|------------|-------|--------|-------|
|      | Min.       | Max.  | Min.   | Max.  |
| A    | 19.81      | 20.32 | 0.780  | 0.800 |
| B    | 20.80      | 21.46 | 0.819  | 0.845 |
| C    | 15.75      | 16.26 | 0.610  | 0.640 |
| D    | 3.55       | 3.65  | 0.140  | 0.144 |
| E    | 4.32       | 5.49  | 0.170  | 0.216 |
| F    | 5.4        | 6.2   | 0.212  | 0.244 |
| G    | 1.65       | 2.13  | 0.065  | 0.084 |
| H    | -          | -     | -      | 0.177 |
| J    | 1.0        | 1.4   | 0.040  | 0.055 |
| K    | 10.8       | 11.0  | 0.426  | 0.433 |
| L    | 4.7        | 5.3   | 0.185  | 0.209 |
| M    | 0.4        | 0.8   | 0.016  | 0.031 |
| N    | 1.5        | 2.49  | 0.087  | 0.102 |

### TO-264 AA (IXFK) Outline




| Dim. | Millimeter |       | Inches   |       |
|------|------------|-------|----------|-------|
|      | Min.       | Max.  | Min.     | Max.  |
| A    | 4.82       | 5.13  | .190     | .202  |
| A1   | 2.54       | 2.89  | .100     | .114  |
| A2   | 2.00       | 2.10  | .079     | .083  |
| b    | 1.12       | 1.42  | .044     | .056  |
| b1   | 2.39       | 2.69  | .094     | .106  |
| b2   | 2.90       | 3.09  | .114     | .122  |
| c    | 0.53       | 0.83  | .021     | .033  |
| D    | 25.91      | 26.16 | 1.020    | 1.030 |
| E    | 19.81      | 19.96 | .780     | .786  |
| e    | 5.46 BSC   |       | .215 BSC |       |
| J    | 0.00       | 0.25  | .000     | .010  |
| K    | 0.00       | 0.25  | .000     | .010  |
| L    | 20.32      | 20.83 | .800     | .820  |
| L1   | 2.29       | 2.59  | .090     | .102  |
| P    | 3.17       | 3.66  | .125     | .144  |
| Q    | 6.07       | 6.27  | .239     | .247  |
| Q1   | 8.38       | 8.69  | .330     | .342  |
| R    | 3.81       | 4.32  | .150     | .170  |
| R1   | 1.78       | 2.29  | .070     | .090  |
| S    | 6.04       | 6.30  | .238     | .248  |
| T    | 1.57       | 1.83  | .062     | .072  |

### Source-Drain Diode

| Symbol   | Test Conditions   | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |            |               |
|----------|---|---|------|------------|---------------|
|          |   | min.  | typ. | max.       |               |
| $I_S$    | $V_{GS} = 0\text{ V}$   | 26N60<br>28N60  |      | 26<br>28   | A<br>A        |
| $I_{SM}$ | Repetitive; pulse width limited by $T_{JM}$   | 26N60<br>28N60  |      | 104<br>112 | A<br>A        |
| $V_{SD}$ | $I_F = I_S, V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |   |      | 1.5        | V             |
| $t_{rr}$ | $I_F = I_S - di/dt = 100\text{ A}/\mu\text{s}, V_R = 100\text{ V}$                                    |   |      | 250        | ns            |
| $Q_{RM}$ |   |   | 1    |            | $\mu\text{C}$ |
| $I_{RM}$ |   |   | 10   |            | A             |

### TO-268AA (D<sup>3</sup> PAK)

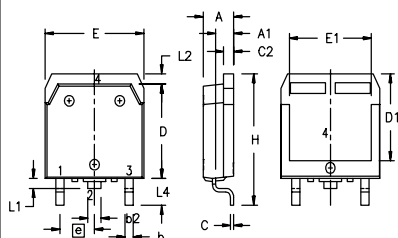

| Dim.           | Millimeter |       | Inches   |      |
|----------------|------------|-------|----------|------|
|                | Min.       | Max.  | Min.     | Max. |
| A              | 4.9        | 5.1   | .193     | .201 |
| A <sub>1</sub> | 2.7        | 2.9   | .106     | .114 |
| A <sub>2</sub> | .02        | .25   | .001     | .010 |
| b              | 1.15       | 1.45  | .045     | .057 |
| b <sub>2</sub> | 1.9        | 2.1   | .75      | .83  |
| C              | .4         | .65   | .016     | .026 |
| D              | 13.80      | 14.00 | .543     | .551 |
| E              | 15.85      | 16.05 | .624     | .632 |
| E <sub>1</sub> | 13.3       | 13.6  | .524     | .535 |
| e              | 5.45 BSC   |       | .215 BSC |      |
| H              | 18.70      | 19.10 | .736     | .752 |
| L              | 2.40       | 2.70  | .094     | .106 |
| L <sub>1</sub> | 1.20       | 1.40  | .047     | .055 |
| L <sub>2</sub> | 1.00       | 1.15  | .039     | .045 |
| L <sub>3</sub> | 0.25 BSC   |       | .010 BSC |      |
| L <sub>4</sub> | 3.80       | 4.10  | .150     | .161 |

### Min. Recommended Footprint

